

## Section 3

**Molded Case Circuit Breakers and Enclosures**

<b>PowerPact™ Circuit Breakers</b>	<b>3-2</b>
PowerPact H- and J-Frame Circuit Breakers	3-2
PowerPact L-Frame Circuit Breakers	3-4
<b>PowerPact™ Automatic Switches</b>	<b>3-5</b>
PowerPact Automatic Switches	3-5
<b>Molded Case Circuit Breakers</b>	<b>3-5</b>
Mag-Gard™ Motor Circuit Protector	3-5
<b>Special Construction Circuit Breakers</b>	<b>3-7</b>
Special Terminal Connectors and Lugs	3-7
Special Calibration and Accessories	3-8
Special Terminations	3-10
Grounded BØ Systems	3-11
UL Marine Listed Circuit Breakers	3-12
<b>Circuit Breaker Accessories</b>	<b>3-12</b>
Factory-Installed Accessories	3-13
Field-Installable Accessories	3-14
Electrical Operators, Handle Accessories and Walking Beam Interlocks	3-15
Mechanical Lug Information	3-16
Compression Lug and Power Distribution Connectors	3-16
<b>Circuit Breaker Dimensions</b>	<b>3-17</b>
<b>Enclosures</b>	<b>3-18</b>
Enclosed Switches, Dimensions, and Accessories	3-18
Accessories	3-18
Key Interlock Systems—Factory Installed Only	3-19

PowerPact H- and J-Frame Circuit Breakers

Table 3.1: H-Frame 150 A UL Current-Limiting Circuit Breaker Frame with Field-Interchangeable Thermal-Magnetic Trip Units [1]

Ampere Rating	Fixed AC Magnetic Trip		Cat. No.					Terminal Wire Range
	Hold	Trip	D Interrupting	G Interrupting	J Interrupting [2]	L Interrupting [2]	R Interrupting [2]	
3P, 600 Vac 50/60 Hz								
15 A	350 A	750 A	HDL36015T	HGL36015T	HJL36015T	HLL36015T	HRL36015T	AL150HD 14-3/0 AWG Al or Cu
20 A	350 A	750 A	HDL36020T	HGL36020T	HJL36020T	HLL36020T	HRL36020T	
25 A	350 A	750 A	HDL36025T	HGL36025T	HJL36025T	HLL36025T	HRL36025T	
30 A	350 A	750 A	HDL36030T	HGL36030T	HJL36030T	HLL36030T	HRL36030T	
35 A	400 A	850 A	HDL36035T	HGL36035T	HJL36035T	HLL36035T	HRL36035T	
40 A	400 A	850 A	HDL36040T	HGL36040T	HJL36040T	HLL36040T	HRL36040T	
45 A	400 A	850 A	HDL36045T	HGL36045T	HJL36045T	HLL36045T	HRL36045T	
50 A	400 A	850 A	HDL36050T	HGL36050T	HJL36050T	HLL36050T	HRL36050T	
60 A	800 A	1450 A	HDL36060T	HGL36060T	HJL36060T	HLL36060T	HRL36060T	
70 A	800 A	1450 A	HDL36070T	HGL36070T	HJL36070T	HLL36070T	HRL36070T	
80 A	800 A	1450 A	HDL36080T	HGL36080T	HJL36080T	HLL36080T	HRL36080T	
90 A	800 A	1450 A	HDL36090T	HGL36090T	HJL36090T	HLL36090T	HRL36090T	
100 A	900 A	1700 A	HDL36100T	HGL36100T	HJL36100T	HLL36100T	HRL36100T	
110 A	900 A	1700 A	HDL36110T	HGL36110T	HJL36110T	HLL36110T	HRL36110T	
125 A	900 A	1700 A	HDL36125T	HGL36125T	HJL36125T	HLL36125T	HRL36125T	
150 A	900 A	1700 A	HDL36150T	HGL36150T	HJL36150T	HLL36150T	HRL36150T	

Table 3.2: J-Frame 250 A UL Current-Limiting Circuit Breaker Frame with Field-Interchangeable Thermal-Magnetic Trip Units [1]

Ampere Rating	Adjustable AC Magnetic Trip		Cat. No.					Terminal Wire Range
	Low	High	D Interrupting	G Interrupting	J Interrupting [2]	L Interrupting [2]	R Interrupting [2]	
3P, 600 Vac 50/60 Hz								
150 A	750 A	1500 A	JDL36150T	JGL36150T	JJL36150T	JLL36150T	JRL36150T	AL175JD 4-4/0 AWG Al or Cu
175 A	875 A	1750 A	JDL36175T	JGL36175T	JJL36175T	JLL36175T	JRL36175T	
200 A	1000 A	2000 A	JDL36200T	JGL36200T	JJL36200T	JLL36200T	JRL36200T	AL250JD 3/0 AWG-350 kcmil Al or Cu
225 A	1125 A	2250 A	JDL36225T	JGL36225T	JJL36225T	JLL36225T	JRL36225T	
250 A	1250 A	2500 A	JDL36250T	JGL36250T	JJL36250T	JLL36250T	JRL36250T	

Table 3.3: H-Frame 150 A and J-Frame 250 A 3P Basic UL Current-Limiting Circuit Breaker Frame Without Terminations [3] or Trip Unit

Circuit Breaker Frame	Ampere Rating	Cat. No.				
		D Interrupting	G Interrupting	J Interrupting [2]	L Interrupting [2]	R Interrupting [2]
H-Frame	15-60 A	HDF36000F06	HGF36000F06	HJF36000F06	HLF36000F06	HRF36000F06
	70-150 A	HDF36000F15	HGF36000F15	HJF36000F15	HLF36000F15	HRF36000F15
J-Frame	150-250 A	JDF36000F25	JGF36000F25	JJF36000F25	JLF36000F25	JRF36000F25

Table 3.4: H-Frame and J-Frame 3P Field-Installable Thermal-Magnetic Trip Unit

15-60 A H-Frame		70-150 A H-Frame		150-250 A J-Frame	
Amperage	Cat. No.	Amperage	Cat. No.	Amperage	Cat. No.
15 A	HT3015	70 A	HT3070	150 A	JT3150
20 A	HT3020	80 A	HT3080	175 A	JT3175
25 A	HT3025	90 A	HT3090	200 A	JT3200
30 A	HT3030	100 A	HT3100	225 A	JT3225
35 A	HT3035	110 A	HT3110	250 A	JT3250
40 A	HT3040	125 A	HT3125	—	—
45 A	HT3045	150 A	HT3150	—	—
50 A	HT3050	—	—	—	—
60 A	HT3060	—	—	—	—

Table 3.5: H- and J-Frame Interrupting Ratings

Voltage	Interrupting Rating				
	D	G	J	L	R
240 Vac	25 kA	65 kA	100 kA	125 kA	200 kA
480 Vac	18 kA	35 kA	65 kA	100 kA	200 kA
600 Vac	14 kA	18 kA	25 kA	50 kA	100 kA

Table 3.6: H- and J-Frame Termination Options

Termination Letter
F = No Lugs (includes terminal nut kit on both ends) [4]
L = Lugs both ends
M = Lugs ON end Terminal Nut Kit OFF end
P = Lugs OFF end Terminal Nut Kit ON end
N = Plug-in
D = Drawout
S = Rear Connected
For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number. H D L 3 6 0 1 5 T



H-Frame and Trip Unit

Accessories see Digest Section 7  
Optional Lugs see Digest Section 7  
Dimensions see Digest Section 7  
Enclosures see Digest Section 7

[1] Circuit breakers will be labeled with Line and Load markings and are not suitable for reverse connections. Available on 3P circuit breakers; not available on I-Line™ constructions. For 100% rated circuit breakers replace the "T" suffix with an "R" suffix. 100% rated is not available in I-Line, plug-in, or drawout constructions.  
[2] Circuit breakers with J, L, and R interrupting ratings are UL Certified as current limiting.  
[3] See Digest Section 7 for lug and termination kits.  
[4] Add TS suffix for circuit breaker without terminal nut kit.

**PowerPact H- and J-Frame Circuit Breakers**

**Table 3.7: H-Frame 150 A and J-Frame 250 A Current-Limiting Circuit Breakers with Lugs and Field-Interchangeable Electronic Trip Units [5] (600 Vac, 50/60 Hz, 3P)**

Electronic Trip Unit			Sensor Rating	Cat. No.					Terminal Wire Range
Type	Function	Trip Unit		D Interrupting	G Interrupting	J Interrupting [6]	L Interrupting [6]	R Interrupting [6]	
Micrologic Standard	LI	3.2	60 A	HDL36060TU31X	HGL36060TU31X	HJL36060TU31X	HLL36060TU31X	HRL36060TU31X	AL150HD 14-3/0 AWG Al or Cu
			100 A	HDL36100TU31X	HGL36100TU31X	HJL36100TU31X	HLL36100TU31X	HRL36100TU31X	AL250JD 3/0 AWG-350 kcmil Al or Cu [7]
			150 A	HDL36150TU31X	HGL36150TU31X	HJL36150TU31X	HLL36150TU31X	HRL36150TU31X	
Micrologic Standard	LSI	3.2S	60 A	HDL36060TU33X	HGL36060TU33X	HJL36060TU33X	HLL36060TU33X	HRL36060TU33X	AL150HD 14-3/0 AWG Al or Cu
			100 A	HDL36100TU33X	HGL36100TU33X	HJL36100TU33X	HLL36100TU33X	HRL36100TU33X	AL250JD 3/0 AWG-350 kcmil Al or Cu [7]
			150 A	HDL36150TU33X	HGL36150TU33X	HJL36150TU33X	HLL36150TU33X	HRL36150TU33X	
Micrologic Ammeter	LSI	5.2A	60 A	HDL36060TU43X	HGL36060TU43X	HJL36060TU43X	HLL36060TU43X	HRL36060TU43X	AL150HD 14-3/0 AWG Al or Cu
			100 A	HDL36100TU43X	HGL36100TU43X	HJL36100TU43X	HLL36100TU43X	HRL36100TU43X	AL250JD 3/0 AWG-350 kcmil Al or Cu [7]
			150 A	HDL36150TU43X	HGL36150TU43X	HJL36150TU43X	HLL36150TU43X	HRL36150TU43X	
Micrologic Energy	LSI	5.2E	60 A	HDL36060TU53X	HGL36060TU53X	HJL36060TU53X	HLL36060TU53X	HRL36060TU53X	AL150HD 14-3/0 AWG Al or Cu
			100 A	HDL36100TU53X	HGL36100TU53X	HJL36100TU53X	HLL36100TU53X	HRL36100TU53X	AL250JD 3/0 AWG-350 kcmil Al or Cu [7]
			150 A	HDL36150TU53X	HGL36150TU53X	HJL36150TU53X	HLL36150TU53X	HRL36150TU53X	
Micrologic Ammeter	LSIG	6.2A	60 A	HDL36060TU44X	HGL36060TU44X	HJL36060TU44X	HLL36060TU44X	HRL36060TU44X	AL150HD 14-3/0 AWG Al or Cu
			100 A	HDL36100TU44X	HGL36100TU44X	HJL36100TU44X	HLL36100TU44X	HRL36100TU44X	AL250JD 3/0 AWG-350 kcmil Al or Cu [7]
			150 A	HDL36150TU44X	HGL36150TU44X	HJL36150TU44X	HLL36150TU44X	HRL36150TU44X	
Micrologic Energy	LSIG	6.2E	60 A	HDL36060TU54X	HGL36060TU54X	HJL36060TU54X	HLL36060TU54X	HRL36060TU54X	AL150HD 14-3/0 AWG Al or Cu
			100 A	HDL36100TU54X	HGL36100TU54X	HJL36100TU54X	HLL36100TU54X	HRL36100TU54X	AL250JD 3/0 AWG-350 kcmil Al or Cu [7]
			150 A	HDL36150TU54X	HGL36150TU54X	HJL36150TU54X	HLL36150TU54X	HRL36150TU54X	
			250 A	JDL36250TU54X	JGL36250TU54X	JJL36250TU54X	JLL36250TU54X	JRL36250TU54X	

MOLDED CASE CIRCUIT BREAKERS AND ENCLOSURES

3

**Table 3.8: H-Frame 150 A and J-Frame 250 A 3P Basic UL Current-Limiting Circuit Breaker Frame Without Terminations [8] or Trip Unit (600 Vac, 250 Vdc)**

Circuit Breaker Frame	Ampere Rating	Cat. No.				
		D Interrupting	G Interrupting	J Interrupting [6]	L Interrupting [6]	R Interrupting [6]
H-Frame	15-60 A	HDF36000F06	HGF36000F06	HJF36000F06	HLF36000F06	HRF36000F06
	70-150 A	HDF36000F15	HGF36000F15	HJF36000F15	HLF36000F15	HRF36000F15
J-Frame	150-250 A	JDF36000F25	JGF36000F25	JJF36000F25	JLF36000F25	JRF36000F25

**Table 3.9: H- and J-Frame Interrupting Ratings**

Voltage	Interrupting Rating				
	D	G	J	L	R
240 Vac	25 kA	65 kA	100 kA	125 kA	200 kA
480 Vac	18 kA	35 kA	65 kA	100 kA	200 kA
600 Vac	14 kA	18 kA	25 kA	50 kA	100 kA

**Table 3.10: Termination Letter**

Termination Letter
F = No Lugs (includes terminal nut kit on both ends) [9]
L = Lugs both ends
M = Lugs ON end Terminal Nut Kit OFF end
P = Lugs OFF end Terminal Nut Kit ON end
N = Plug-in
D = Drawout
S = Rear Connected
H D L 3 6 0 1 5 T
For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.
Accessories see Digest Section 7
Optional Lugs see Digest Section 7
Dimensions see Digest Section 7
Enclosures see Digest Section 7

**Table 3.11: Micrologic Field-Installable Trip Unit**

Model	Trip Function	Trip Unit	Continuous Current	Trip Unit Cat. No.
Micrologic Standard	LI	3.2	15-20-25-30-35-40-45-50-60	HE3060U31X
			35-40-45-50-60-70-80-90-100	HE3100U31X
			50-60-70-80-90-100-110-125-150	HE3150U31X
	LSI	3.2S	70-80-100-125-150-175-200-225-250	JE3250U31X
			15-20-25-30-35-40-45-50-60	HE3060U33X
			35-40-45-50-60-70-80-90-100	HE3100U33X
Micrologic Ammeter	LSI	5.2A	50-60-70-80-90-100-110-125-150	HE3150U33X
			70-80-100-125-150-175-200-225-250	JE3250U33X
			15-60	HE3060U43X
	LSIG	6.2A	35-100	HE3100U43X
			50-150	HE3150U43X
			70-250	JE3250U43X
Micrologic Energy	LSI	5.2E	15-60	HE3060U53X
			35-100	HE3100U53X
			50-150	HE3150U53X
	LSIG	6.2E	70-250	JE3250U53X
			15-60	HE3060U54X
			35-100	HE3100U54X
			50-150	HE3150U54X
			70-250	JE3250U54X

[5] Circuit breakers will be labeled with Line and Load markings and are not suitable for reverse connections. Available on 3P circuit breakers; not available on I-Line™ constructions. For 100% rated circuit breakers replace the "T" suffix with an "R" suffix. 100% rated is not available in I-Line, plug-in, or drawout constructions.

[6] Circuit breakers with J, L, and R interrupting ratings are UL Certified as current limiting.

[7] For smaller wire (4-4/0 AWG Al or Cu), replace the lug wire binding screws with longer binding screws provided.

[8] See Digest Section 7 for lug and termination kits.

[9] Add TS suffix for circuit breaker without terminal nut kit.

**PowerPact L-Frame Molded Case Circuit Breakers**

**Table 3.12: L-Frame 3 Pole, 600 A Current-Limiting [10] Circuit Breakers with Lugs and Field-Interchangeable Electronic Trip Units (600 Vac, 50/60 Hz) [11][12]**

Electronic Trip Unit			Sensor Rating	Cat. No.				Terminal Wire Range
Type	Function	Trip Unit		D Interrupting	G Interrupting	J Interrupting [10]	L Interrupting [10]	
Micrologic Standard	LI	3.3	250 A	LDL36250TU31X	LGL36250TU31X	LJL36250TU31X	LLL36250TU31X	AL400L61K3D (1) 2 AWG-600 kcmil Cu (1) 2 AWG-500 kcmil Al
			400 A	LDL36400TU31X	LGL36400TU31X	LJL36400TU31X	LLL36400TU31X	
			600 A	LDL36600TU31X	LGL36600TU31X	LJL36600TU31X	LLL36600TU31X	
Micrologic Standard	LSI	3.3S	250 A	LDL36250TU33X	LGL36250TU33X	LJL36250TU33X	LLL36250TU33X	AL400L61K3D (1) 2 AWG-600 kcmil Cu (1) 2 AWG-500 kcmil Al
			400 A	LDL36400TU33X	LGL36400TU33X	LJL36400TU33X	LLL36400TU33X	
			600 A	LDL36600TU33X	LGL36600TU33X	LJL36600TU33X	LLL36600TU33X	
Micrologic Ammeter	LSI	5.3A	400 A	LDL36400TU43X	LGL36400TU43X	LJL36400TU43X	LLL36400TU43X	AL600S52K3 (2) 2/0 AWG-500 kcmil Al/Cu
			600 A	LDL36600TU43X	LGL36600TU43X	LJL36600TU43X	LLL36600TU43X	
Micrologic Energy	LSI	5.3E	400 A	LDL36400TU53X	LGL36400TU53X	LJL36400TU53X	LLL36400TU53X	
			600 A	LDL36600TU53X	LGL36600TU53X	LJL36600TU53X	LLL36600TU53X	
Micrologic Ammeter	LSIG	6.3A	400 A	LDL36400TU44X	LGL36400TU44X	LJL36400TU44X	LLL36400TU44X	
			600 A	LDL36600TU44X	LGL36600TU44X	LJL36600TU44X	LLL36600TU44X	
Micrologic Energy	LSIG	6.3E	400 A	LDL36400TU54X	LGL36400TU54X	LJL36400TU54X	LLL36400TU54X	
			600 A	LDL36600TU54X	LGL36600TU54X	LJL36600TU54X	LLL36600TU54X	

**Table 3.13: L-Frame 3 Pole, 600 A Circuit Breaker Frame without Terminations or Trip Unit (600 Vac, 50/60 Hz) [13]**

Ampere Rating	Interrupting Rating			
	D	G	J	L
250 A (70-250 A)	LDF36000F25	LGF36000F25	LJF36000F25	LLF36000F25
400 A (125-400 A)	LDF36000F40	LGF36000F40	LJF36000F40	LLF36000F40
600 A (200-600 A)	LDF36000F60	LGF36000F60	LJF36000F60	LLF36000F60

**Table 3.14: Termination Options**

Termination Letter	Termination Option
A	I-Line (See Section 9)
F	No lugs (includes terminal nut kit on both ends)
L	Lugs both ends
M	Lugs ON end, terminal nut kit OFF end
P	Lugs OFF end, terminal nut kit ON end
N	Plug In
D	Drawout
S	Rear Connected

For factory-installed termination, place termination letter in the third block of the circuit breaker catalog number.  
J G L 3 6 2 5 0 or L G L 3 6 6 0 0 U 4 4 X

Accessories see Digest Section 7  
Optional Lugs see Digest Section 7  
Dimensions see Digest Section 7

**Table 3.15: L-Frame 3P Field-Installable Micrologic Electronic Trip Units**

Electronic Trip Unit			Continuous Current	Trip Unit Cat. No.
Type	Function	Code		
Micrologic Standard	LI	3.3	70-80-100-125-150-175-200-225-250	LE3250U31X
			125-150-175-200-225-250-300-350-400	LE3400U31X
	LSI	3.3S	200-225-250-300-350-400-450-500-600	LE3600U31X
			70-80-100-125-150-175-200-225-250	LE3250U33X
Micrologic Ammeter	LSI	5.3A	125-400	LE3400U43X
			200-600	LE3400U44X
	LSIG	6.3A	200-600	LE3600U44X
Micrologic Energy	LSI	5.3E	125-400	LE3400U53X
			200-600	LE3600U53X
	LSIG	6.3E	125-400	LE3400U54X
			200-600	LE3600U54X

**Table 3.16: L-Frame Interrupting Ratings**

Voltage	Interrupting Rating			
	D	G	J	L
240 Vac	25 kA	65 kA	100 kA	125 kA
480 Vac	18 kA	35 kA	65 kA	100 kA
600 Vac	14 kA	18 kA	25 kA	50 kA

[10] J and L interrupts are UL Certified as current limiting.

[11] Circuit breakers will be labeled with Line and Load markings and are not suitable for reverse connections.

[12] Only available on 3P unit-mount circuit breakers. Not allowed on I-Line constructions. For 100% rated field-interchangeable circuit breakers, replace the "T" suffix with an "R". 100% field-interchangeable circuit breakers are not allowed on 600 A I-Line, Plug-In, or Drawout constructions.

[13] See Digest Section 7 for lug and termination kits.

### Automatic Switches

Automatic molded case switches open instantaneously at a factory preset magnetic trip point, calibrated to protect only the molded case switch itself, when it is subjected to high fault currents. The trip point is nonadjustable and provides no overload or low level fault protection.

Molded case switches open when the handle is switched to the OFF position or in response to an auxiliary tripping device such as a shunt trip.

All molded case switches will accept the same lugs and accessories as equivalent thermal-magnetic circuit breakers, with the exception of Q-frame switches which do not have electrical accessories available.

Automatic molded case switches are UL Listed per UL 489 and are CSA Certified.

**Table 3.17: Q-Frame (240 Vac) PowerPact™ Automatic Molded Case Switches**

Circuit Breaker	Poles	Ampere Rating	J Interrupting Rating		Wire Range
			Cat. No.	Trip Point	
Q-Frame <sup>[1]</sup>	2	225 A	QBL22000S22	4500 A	4 AWG–300 kcmil
	3	225 A	QBL32000S22	4500 A	

### Mag-Gard Motor Circuit Protector

Instantaneous trip magnetic only circuit breakers have a single adjustment which simultaneously sets the magnetic trip level of each individual pole. Mag-Gard circuit breakers comply with NEC® requirements for providing motor circuit protection when installed as part of a UL Listed combination controller having motor overload protection. Interrupting ratings are established for these UL Recognized Components only when they are used in combination with motor starters with properly sized overload relays and contactors.

Mag-Gard circuit breakers will accept the same lugs and accessories as equivalent thermal-magnetic circuit breakers.

**Table 3.18: Special Low-Magnetic Trip Settings for PowerPact H- and J-Frame Thermal Magnetic Circuit Breakers 70–125 A**

Amps	Special Low Mags		I <sub>l</sub> on Label	Mag Suffix	Interrupting Rating				
	Hold <sup>[1]</sup>	Trip <sup>[1]</sup>			D	G	J	L	R
70	400	850	625	H83	HDL36070H83	HGL36070H83	HJL36070H83	HLL36070H83	HRL36070H83
80	400	850	625	H83	HDL36080H83	HGL36080H83	HJL36080H83	HLL36080H83	HRL36080H83
90	400	850	625	H83	HDL36090H83	HGL36090H83	HJL36090H83	HLL36090H83	HRL36090H83
100	400	850	625	H83	HDL36100H83	HGL36100H83	HJL36100H83	HLL36100H83	HRL36100H83
110	400	850	625	H83	HDL36110H83	HGL36110H83	HJL36110H83	HLL36110H83	HRL36110H83
125	800	1450	1125	H84	HDL36125H84	HGL36125H84	HJL36125H84	HLL36125H84	HRL36125H84

**Table 3.19: Special High-Magnetic Trip Settings for PowerPact H- and J-Frame Thermal Magnetic Circuit Breakers**

Amps	Special High Mags		I <sub>l</sub> on Label	Mag Suffix	Interrupting Rating				
	Hold <sup>[1]</sup>	Trip <sup>[1]</sup>			D	G	J	L	R
90	900	1700	1300	H85	HDL36090H85	HGL36090H85	HJL36090H85	HLL36090H85	HRL36090H85

**Table 3.20: Special Low-Magnetic Trip Settings for PowerPact H- and J-Frame Thermal Magnetic Circuit Breakers 150–200 A**

Amps	Special Low Mags		I <sub>l</sub> on Label	Mag Suffix	Interrupting Rating				
	Low <sup>[2]</sup>	High <sup>[2]</sup>			D	G	J	L	R
150	875L	1750H		H29	JDL36150H29	JGL36150H29	JJL36150H29	JLL36150H29	JRL36150H29
200	1250L	2500H		H32	JDL36200H32	JGL36200H32	JJL36200H32	JLL36200H32	JRL36200H32

**Table 3.21: H- and J-Frame Interrupting Ratings**

Voltage	Interrupting Rating				
	D	G	J	L	D
240 Vac	25 kA	65 kA	100 kA	125 kA	200 kA
480 Vac	18 kA	35 kA	65 kA	100 kA	200 kA
600 Vac	14 kA	18 kA	25 kA	50 kA	100 kA

Accessories see [Circuit Breaker Accessories](#), page 3-12 through page 3-16

Optional Lugs see [page 3-16](#)

Dimensions see [page 3-17](#)

[1] Withstand rating of 10 kA at 240 Vac.

[1] Hold and Trip indicate fixed magnetic trip levels

[2] Low and High refer to adjustable mag level setting.

**LA/LH Motor Circuit Protectors**

Mag-Gard™ Motor Circuit Protectors (MCP) are instantaneous-trip magnetic-only circuit breakers. They have a single adjustment which simultaneously sets the magnetic trip level of each individual pole. Mag-Gard™ circuit breakers comply with NEC requirements for providing motor circuit protection when installed as part of a UL Listed combination controller having motor overload protection. Interrupting ratings are established for these UL Recognized Components only when they are used in combination with motor starters with properly sized overload relays and contactors.

LA/LH-Frame Mag-Gard™ Motor Circuit Protectors (MCP):

- 400 A rating at up to 600 Vac
- Instantaneous-trip magnetic-only circuit breakers available in unit mount and I-Line 3-pole constructions
- Accept the same lugs and accessories as equivalent LA/LH-Frame circuit breakers
- Available in unit mount and I-Line construction<sup>[3]</sup>
- High-interruption (LHL) are also available

Complies with NEC requirements for providing motor circuit protection when installed as part of a UL Listed combination controller having motor overload protection.

**Table 3.22: LA/LH Frame Magnetic Only 3 Pole, 600 Vac, 50/60 Hz <sup>[3]</sup>—Three Device Solutions <sup>[4]</sup>**

Ampere Rating	Trip Unit	Adjustable <sup>[5]</sup> Trip Range (A)	250 Vdc Multiplier	Cat. No.
LAL	400	—	High = 1.2 Low = 1.4	LAL3640022M LAL3640028M LAL3640030M LAL3640031M LAL3640032M LAL3640033M LAL3640035M LAL3640036M

**Table 3.23: LAL Adjustable Instantaneous-Trip Circuit Breakers for Single Motor Circuit Protection**

Hp Ratings of Induction Type Squirrel-Cage and Wound Rotor Motors 3Ø 60 Hz				Full Load Amperes <sup>[6]</sup>	Mag-Gard Circuit Breaker Cat. No.	Magnetic Trip Settings <sup>[7]</sup>	
200 Vac	230 Vac	460 Vac	575 Vac			MIN	MAX
75	—	—	—	221	LAL3640033M	700%	1400%
—	—	200	—	240	LAL3640035M	700%	1500%
—	—	—	250	242	LAL3640035M	700%	1400%
—	100	—	—	248	LAL3640035M	700%	1400%
100	—	—	—	285	LAL3640036M	700%	1400%
—	—	—	300	289	LAL3640036M	700%	1400%
—	—	250	—	302	LAL3640036M	700%	1300%
—	125	—	—	312	LAL3640036M	600%	1300%



LAL3640031M  
Motor Circuit Protector



LAL3640036M  
Motor Circuit Protector

3 MOLDED CASE CIRCUIT BREAKERS AND ENCLOSURES

<sup>[3]</sup> These electronic magnetic-only motor circuit protectors are available with I-Line constructions. Consult the factory.

<sup>[4]</sup> Three-device solutions are the traditional solutions: motor circuit protector plus motor starter plus overload relay.

<sup>[5]</sup> UL magnetic trip tolerances are -20%/+30% from the nominal values shown.

<sup>[6]</sup> [7] Motor full-load currents are taken from NEC Table 430.250. Select wire and circuit breakers on basis of horsepower rather than nameplate full-load current per NEC 430.6 (A) for general motor applications. Do not use these values to select overload relay thermal units. See Digest Section 14 for selection of thermal units when actual full load current is not known. The voltages listed are rated motor voltages. Corresponding nominal system voltages are 200–208, 220–240, 440–480 and 550–600 V.

<sup>[7]</sup> Only MIN and MAX settings are shown, intermediate settings are available on all circuit breakers.

**I-Line™ Special Terminal Connectors**  
**Bolt-On I-Line Circuit Breakers**

**NOTE:** Bolt-on I-Line connectors are not available on Powerpact™ circuit breakers.

The standard I-Line circuit breaker is designed to provide a high quality, secure connection between the distribution bus and circuit breaker. I-Line circuit breakers use plug-on type line-side connectors. The parallel line-side connectors “clamp” around the bus bars. In case of a short circuit, the increased magnetic flux causes the connectors to grasp the bus bars even tighter. I-Line circuit breakers with bolted connections have clamp-on jaws that are bolted around the main bus, as shown. The bolt-on I-Line design is offered as an alternative in order to meet specifications requiring a bolted connection. Bolt-on I-Line construction is available on FY, QB, QD, QG, QJ, Q4, LA, and LH frame circuit breakers and molded case switches, and SL225 and SL400 sub-feed lugs.

To order on all products except QB, QD, QG and QJ, simply add the letter “B” in the catalog number prefix of the circuit breaker, e.g., LA36100 becomes LAB36100. For QB, QD, QG and QJ, insert the letter “E” in the third position, e.g., QBE, QDE, etc.

**Top-Feed I-Line Circuit Breakers**

I-Line panelboards may require the use of a top-feed I-Line circuit breaker in applications where a top-feed main circuit breaker is required. This involves having the I-Line jaw connectors on the OFF end of the circuit breaker, as opposed to the standard location on the ON end of the circuit breaker. To designate this construction, simply place the suffix “MT” at the end of the circuit breaker catalog number, e.g., FA36100 becomes FA36100MT. On LA or LH top-feed I-Line circuit breakers, accessories must be factory installed. This option is available in PowerPact™ H and J-frame by placing a “K” in the 4th position (termination indicator) of the circuit breaker catalog number, e.g., HGA36125 becomes HGK36125. This option is not available on 600 A LA or LH circuit breakers, or Powerpact M-, P- and R-frame circuit breakers.


**“CBA” I-Line Jaw Configuration (Non-PowerPact Circuit Breaker)**

Standard 1- and 2-pole I-Line circuit breakers are ordered by designating the required phase connection letters as a suffix to the circuit breaker catalog number. 3-pole circuit breakers do not require this phase designation and are supplied with an “ABC” phase jaw configuration as standard. In most applications this is acceptable since the phase loading is evenly distributed. In applications where the phases must be reversed it is possible to order a “CBA” jaw configuration by simply placing the letters “CBA” at the end of the standard catalog number, e.g., LA36100 becomes LA36100CBA.


**Control Wire Tap Lugs**

Control wire tap lugs are used in applications requiring connection to a small wire (22-14 AWG) for control circuits. This is accomplished by crimping the wire to a standard wire crimp terminal (not included) and fastening the terminal to the circuit breaker lug. On LA lugs, the lug is drilled to accept a 6-32 screw (included) to secure the crimp connector. On FA lugs, a flat slip-on crimp connector is used to attach to a shim-like connector placed under the circuit breaker lug.


**Note:** To order as a factory-installed device on Q4, LA, or LH circuit breakers, add suffix number 8041 to circuit breaker catalog number, e.g., LAL364008041. To order as a factory-installed device on MG, MJ, PG, PJ, PL RG, RJ and RL use the product selector or the respective PowerPact catalog. Tapped lugs will be installed on the “ON” and “OFF” ends of the circuit breaker.



Plug-On Connector



Bolted Connector

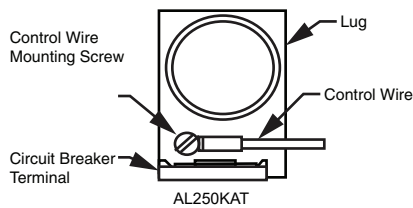

**Table 3.24: Control Wire Terminations for Circuit Breakers**

Circuit Breaker	Cat. No.	Standard Package Qty.
Q4, LA, LH	AL400LAT	1

**Table 3.25: Tapped Lugs for PowerPact™ Circuit Breakers**

Circuit Breaker	Amperes Max.	Kit Cat. No.	Standard Package Qty.
MG, MJ, PG, PJ, PL	800 A	AL800M23TK	3
		AL800P6TK	3
PG, PJ, PL	800 A	AL800M23TK4	4
		AL800P6TK4	4
		AL1200P24TK	1
	1200 A	AL1200P25TK	3
		AL1200P25TK4	4
		AL1200R53TK [1]	1
RG, RJ, RL	1200 A	AL1200R53TK [1]	1

[1] I-Line only.

### Special Magnetic or Thermal Calibration

#### Magnetic

The magnetic trip ranges for standard circuit breakers are listed in the Square D Digest. Requirements outside this range are best accommodated by selecting another standard circuit breaker. In some cases where this is not practical, a circuit breaker may be ordered with special magnetic calibration. Special magnetic calibration is not possible in all cases. Circuit breakers with special magnetic calibration and an **adjustable** magnetic trip range are **not** UL Listed; those with a **fixed** magnetic trip setting are UL Listed. Consult Schneider Electric local sales office for more information.

#### 50 Degrees C

UL 489 Listed molded case circuit breakers are calibrated for 40°C ambient temperature. To meet requirements of higher ambient conditions, circuit breakers can be factory calibrated for a 50°C ambient temperature. Circuit breakers with special thermal calibration are not UL Listed. To order 50°C calibration, add “35” suffix to LA/LH or “CA” to H or J thermal magnetic circuit breaker. Consult local sales office for more information.

#### Rear-Connected Studs

Rear-connected studs are designed to allow rear termination in applications such as control panels where wire gutter space may be limited. The studs may be bolted directly to the bus or lugs may be attached to the studs.

**NOTE:** Long and short studs must be alternated on adjacent poles to assure proper electrical clearance.

**Table 3.26: Rear-Connected Studs—Not UL Listed**

Circuit Breaker Cat. No. Prefix	Ampere Ratings	Stud Cat. No.	Dimensions			
			Overall Length	To Back of Circuit Breaker	Diameter	Threads/Inch
LAL, LHL	125–400 A	LAS114	12-3/16 in.	11-1/2 in.	3/4 in.	16

**NOTE:** Use alternate size studs on adjacent poles to obtain proper electrical clearance.



Rear-Connected Studs

#### Visi-Blade™ Circuit Breakers

Visi-blade construction is a modification to the cover of a thermal-magnetic circuit breaker, a molded case switch, or a Mag-Gard™ circuit breaker which provides a “window” through which the position of the movable contacts can be verified. Luminescent paint is applied to the movable contact arms to clearly indicate their position. Gases produced during high level interruption may cause clouding of the Visi-blade window. Visi-Blade construction is not available on circuit breakers not included in table below.

Add suffix letter “V” to the circuit breaker catalog number, i.e., LAL36400V.

**Table 3.27: Available Visi-Blade Circuit Breakers**

Circuit Breaker Prefix	Amperes
LA, LH	125–400 A



### Moisture and Fungus Resistant Treatment for Circuit Breakers

This treatment covers the application of moisture and fungus resistant varnish to circuit breakers and molded case switches.

- The varnish meets Military Specification MIL-V-173C VARNISH, MOISTURE AND FUNGUS RESISTANT.
- The treatment meets military Specification MIL-T-152E TREATMENT, MOISTURE AND FUNGUS-RESISTANT, OF COMMUNICATIONS, ELECTRONIC, AND ASSOCIATED ELECTRICAL EQUIPMENT.

The treatment of circuit breakers in accordance with said specifications is intended to protect them against the moisture and fungus condition encountered in service by retarding the absorption of moisture and inhibiting the growth of fungi.

To order for L-frame circuit breakers, place the suffix "FT" at the end of the circuit breaker catalog number, e.g., LAL36100 becomes LAL36100FT. To order for QB, QD, and QG circuit breakers, place the suffix "YF" at the end of the circuit breaker catalog number, e.g., QDL32150 becomes QDL32150YF. ED, EG, EF, PowerPact™ B-, D-, H-, J-, L, M-, P- and R-frame circuit breakers are inherently fungus resistant and need no further treatment.

### Short Handle for LA/LH Circuit Breakers

Certain applications of the LA/LH circuit breakers (as mains in particular panelboards) require the use of a slightly shorter operating handle. For ordering information refer to the chart below.

**Table 3.28: Catalog Numbers for Short Handle LA/LH Circuit Breakers**

Lug Configuration Desired		Catalog "Prefix Indication"	Catalog "Suffix Indication"	Circuit Breaker Cat. No.
ON End	OFF End			
Lugs	Lugs	"L"	"MB"	LAL36400MB
No Lugs	Lugs	"P"	"MB"	LAP36400MB
Lugs	No Lugs	"P"	"MT"	LAP36400MT
No Lugs	No Lugs	"F"	"MB"	LAF36400MB

### Lug Deletion

In some applications, the circuit breaker does not require lugs on one or both ends. To meet this requirement, the circuit breaker should be ordered with the desired lug configuration as indicated below. If necessary, lugs may be removed in the field. However, if lugs are removed in the field, circuit breaker **Types** Q4, LA and LH must be secured with pan-mounting screws, or have "P" screws (cover screws and nuts) installed securing the base to the cover.

**Table 3.29: Lug Configuration [2]**


ON End	OFF End	Circuit Breaker Prefix – Suffix
Lugs	Lugs	"L" (e.g., LAL36100)
No Lugs	No Lugs	"F" (e.g., LAF36100)
No Lugs	Lugs	"P" (e.g., LAP36100)
Lugs	No Lugs	"P – MT" [3] (e.g., LAP36100MT)

### Termination Insert Kits

The standard lugs supplied with EDB, EGB, EJB, and FJA circuit breakers and molded case switches are secured by means of a screw fastened through the circuit breaker terminal into the lug body. If the standard lug is removed and a bolted connection to the circuit breaker terminal pad is desired, a threaded insert kit is required. The insert is installed below the terminal pad. For ordering information see chart below.

**Table 3.30: Termination Kit Inserts**

Kit Cat. No.	Inserts Per Kit	Circuit Breakers
TIKFD	3	EDB, EGB, EJB, FJA

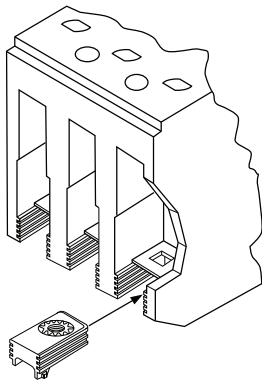

EDB, EGB,  
EJB, FJA

### Electric Joint Compound

I-Line™ circuit breakers, I-Line busway plug-on units, I-Line panelboards and switchboards, QMB plug-on switches and motor control center plug-on units are supplied with factory applied joint compound on the plug-on connectors. The compound should not be removed because it contributes to the overall performance of the connection. Whenever one of these units is removed and reinstalled, the joint compound should be reapplied. Catalog number PJC 7201 is a two-ounce container of compound specially formulated for the I-Line, QMB and motor control center connections. No other type of commercially available joint compound should be used.

**Table 3.31: Electric Joint Compound**


Use With	Cat. No.
I-Line Circuit Breakers, QMB Plug-On Units, or Model-V MCC Units	PJC7201
SED Drawout Circuit Breakers	PJC8311



Joint Compound

[2] See information on termination kits below  
 [3] MT suffix also required (except for PowerPact™).


**Circuit Breakers for Grounded B-Phase (BØ) (Corner-Grounded Delta) Systems**

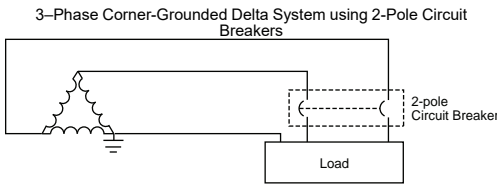

- For use on 480 V systems, LH type circuit breakers must be ordered as 600 V versions and with a 5861 suffix (i.e. LHL361005861).
- For use on 240 V systems, circuit breakers may be ordered as 480 V versions with a 5861 suffix (i.e. LHL341005861).
- LA type circuit breakers are not available with grounded B phase markings.
- Two-pole 240 V grounded B-phase circuit breakers (except EDB, EGB, EJB, QB, QD, QG, QJ, BD, BG, and BJ) will be built using three-pole modules.
- Two-pole grounded BØ circuit breakers will be labeled with 240 Vac interrupting ratings.
- No self-certification is available for interrupting ratings greater than shown in the tables below.

**Table 3.32: Application Data for 240 Vac 3Ø Corner-Grounded Delta System**

Cat. No. Prefix	Poles	UL Listed Interrupting Rating	
		Ampere Rating	240 Vac Interrupting Rating
QO-H, QOB-H	2	15–100 A	5 kA
QB, QD, QG, QJ	2 [4]	70–250 A	10 kA
EDB, EGB, EJB	2 [4]	15–125 A	18 kA, 35 kA, 65 kA
BD, BG, BJ	2 [4]	15–125 A	18 kA, 35 kA, 65 kA
HD, HG	2 [4]	15–150 A	42 kA
HJ, HL	2 [5]	15–150 A	65 kA, 100 kA
JD, JG, JJ, JL	2 [5]	150–250 A	42 kA, 65 kA, 100 kA
LH, LHL	2 [5]	125–400 A	30 kA
MG, MJ Electronic Trip Unit	2 [5][6]	300–800 A	65 kA
PG, PJ, PK, PL Electronic Trip Unit	2 [5][6]	600–1200 A	65 kA
RG, RK Electronic Trip Unit	2 [5][6]	1200–2500 A	35 kA, 65 kA
RJ Electronic Trip Unit	2 [5][6]	1200–2500 A	100 kA
RL Electronic Trip Unit	2 [5][6]	1200–2500 A	100 kA

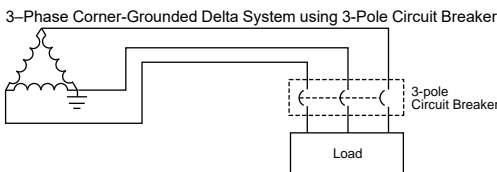

**NOTE:** Three-pole circuit breakers may be used on three-phase corner-grounded delta systems. The outside poles are to be connected to the ungrounded phase and the grounded conductor connected to the center pole. Connecting the circuit breaker in a manner other than that described or shown may result in an unsafe application of the circuit breaker.

**Table 3.33: 480 Vac 3Ø Corner-Grounded Delta System [7]**

Cat. No. Prefix	Poles [8]	UL Listed Interrupting Rating [8]	
		Ampere Rating	480 Vac 3Ø Interrupting Rating
HD, HG, HJ, HL	3	15–150 A	18 kA, 35 kA, 65 kA, 100 kA
JD, JG, JJ, JL	3	150–250 A	
LH, LHL	3	125–400 A	14 kA
LD, LG, LJ, LL Electronic Trip Unit	3	250–600 A	18 kA, 35 kA, 65 kA, 100 kA
MG, MJ Electronic Trip Unit	3 [6]	300–800 A	35 kA
PG, PK Electronic Trip Unit	3 [6]	600–1200 A	35 kA, 50 kA
PG, PK Micrologic Trip Unit	3 [6]	250–1200 A	
PJ, PL Electronic Trip Unit	3 [6]	600–1200 A	65 kA, 100 kA
PJ, PL Micrologic Trip Unit	3 [6]	250–1200 A	
RG, RJ, RK RL Electronic Trip Unit	3 [6]	1200–2500 A	35 kA, 65 kA, 65 kA, 100 kA
RG, RJ, RK, RL Micrologic Trip Unit	3 [6]	600–2500 A	
NT	3	800–1200 A	100 kA
NW	3	800–6000 A	150 kA

[4] Standard labeling includes grounded B phase.  
 [5] Built using 3P module.  
 [6] Electronic = ET1.0 Electronic Trip System  
 Micrologic = 3.0, 5.0, 3.0A, 5.0A, 6.0A, 5.0P, 6.0P, 5.0H and 6.0 H Micrologic Trip System.  
 [7] Refer to NEC 240.85 for application guidance.  
 [8] The grounded phase must be connected through the center pole only.

### UL Marine Listed/CSA Certified Circuit Breakers (UL 489 Supplement SA)

PowerPact H and J circuit breakers with thermal magnetic trip units meet the UL 489 SA requirements on vessels of any length under or over 65 ft. (19.8 m). PowerPact H, J, and L circuit breakers with Micrologic trip units meet the UL 489 Supplement SA requirements for use on vessels over 65 ft. (19.8 m) in length. Marine circuit breakers must not use aluminum or aluminum alloys for terminal connections and must be calibrated at an ambient temperature of 104°F (40°C). Standard circuit breakers should not be specified or used in place of marine rated circuit breakers.



For use on vessels over 65 ft. (19.8 m) in length.

Circuit breakers can be ordered with the Marine SA listing by adding the suffix "YA" (marine) to the catalog number.

**Table 3.34: Circuit Breakers for Marine Applications**

Cat. No. Prefix	Poles	Ampere Rating	Application	Cat. No.
LA, LAL	2, 3	125–400 A	For use only on vessels over 65 feet (19.8 m) in length.	Add the number "9" after the catalog number prefix of the standard circuit breaker catalog number. Example: Standard FAL36100 Marine FAL936100
LH, LHL	2, 3	125–400 A		
PowerPact™ HD, HG, HJ, HL [9]	2, 3	15–150 A	For use on vessels over and under 65 feet (19.8 m) in length.	Add suffix "YA" after the standard circuit breaker catalog number. Example: Standard HGL36100 Marine HGL36100YA
PowerPact JD, JG, JJ, JL [9]	2, 3	150–250 A		
PowerPact HD, HG, HJ, HL, HR [10]	2, 3	15–150 A	For use on vessels over 65 feet (19.8m) in length.	
PowerPact JD, JG, JJ, JL, JR [10]	2, 3	150–250 A		
PowerPact LD, LG, LJ, LL, LR	3, 4	250–600 A	For use only on vessels over 65 feet (19.8 m) in length.	
PowerPact MG, MJ	2, 3	300–800 A		
PowerPact PG, PJ, PL	2, 3, 4	100–1200 A		
PowerPact RG, RJ, RL	2, 3, 4	600–2500 A		

### UL Naval Listed/CSA Certified Circuit Breakers (UL 489 Supplement SB)

PowerPact H, J, and L circuit breakers with Micrologic trip units meet the UL 489 Supplement SB requirements for naval vessels. These circuit breakers are subject to various vibration testing as described in UL 489 Supplement SB. Naval circuit breakers must not use aluminum or aluminum alloys for terminal connections and are calibrated at an ambient temperature of 122°F (50°C). Standard circuit breakers should not be specified or used in the place of naval rated circuit breakers.

Circuit breakers can be ordered with the Naval SB listing by adding the suffix "YA1" (naval) to the catalog number.

**Table 3.35: Circuit Breakers for Naval Applications**

Cat. No. Prefix	Poles	Ampere Rating	Application	Cat. No.
HD, HG, HJ, HL [11]	2, 3	15–150 A	For use on non-combat and auxiliary navalships of any length.	Add suffix "YA1" after the standard circuit breaker catalog number. Example: Standard HGL36100 Marine HGL36100YA1
JD, JG, JJ, JL [11]	2, 3	150–250 A		
LD, LG, LH, LL	3, 4	250–600 A		

[9] Thermal-Magnetic trip units only.

[10] Micrologic trip units only.

[11] With Micrologic trip units only thermal-magnetic circuit breakers not approved.



**Factory-Installed LA and Q-Frame Electrical Accessories**

Electrical accessories are available on all molded case circuit breakers except QOM1 circuit breakers.

- Combination accessories may be ordered by description, i.e., 1021 and 1212.
- All AC electrical accessories shown below are rated for 50/60 Hz.
- See page 3-14 for field-installable accessories. See Digest Section 7 for PowerPact™ circuit breaker accessories.

**Table 3.36: Factory-Installed Accessories for Thermal-Magnetic LA and Q-Frame Circuit Breakers**

Accessory	Description	Rated Voltage	Coil Burden	Suffix
Shunt Trip	Trips the circuit breaker from a remote location by means of a trip coil energized from a separate circuit. A 120 V shunt trip will operate at 55% or more of rated voltage. All other shunt trips will operate at 75% or more of rated voltage. <b>Application</b> <ul style="list-style-type: none"> <li>• For use with momentary or maintained push button</li> <li>• Sure Trip Capacitor Unit requires 48 Vdc shunt trip</li> <li>• Leads: (2) Black, 18 AWG Cu</li> </ul>	24 Vac	21 VA	-1042
		120 Vac	24 VA	-1021
		208 Vac	107 VA	-1021
		240 Vac	154 VA	-1021
		277 Vac	14 VA	-1037
		480 Vac	45 VA	-1037
		24 Vdc	36 VA	-1027
		48 Vdc	36 VA	-1028
		125 Vdc	44 VA	-1029
250 Vdc	15 VA	-1030		
Ground-Fault Shunt Trip	Trips the circuit breaker electrically using the signal from a Micrologic™ Ground-Fault Module. <b>Application</b> <ul style="list-style-type: none"> <li>• For use only with obsolete GP Ground-Censor™ system or add on ground-fault module</li> <li>• Leads: (2) Orange 18 AWG Cu</li> </ul>	—	—	-G
Undervoltage Trip (UVR)	Trips the circuit breaker electrically when a control circuit falls below 35 to 70% of nominal (not field adjustable). Picks up at 35–85% of nominal voltage. <b>Application</b> <ul style="list-style-type: none"> <li>• UVR must be energized in order to close the circuit breaker</li> <li>• Leads: (2) Brown 18 AWG Cu leads</li> </ul>	24 Vac 120 Vac 240 Vac 24 Vdc 48 Vdc	5 VA 8 VA 8 VA 2 VA 3 VA	-1143 -1121 -1124 -1127 -1128
Auxiliary Switches	Monitors circuit breaker contact status and provides a remote signal indicating the circuit breaker contacts are OPEN or CLOSED. <b>Application</b> <ul style="list-style-type: none"> <li>• Max. Load = 10 A @ 125–250 Vac, ¼ hp @ 125–250 Vac, 5 A @ 30 Vdc</li> <li>• Leads: Yellow for "A", Blue for "B", Striped for common 18 AWG Cu</li> </ul>	1A/1B 2A/2B	See load info. in App. text at left	-1212 -1352
		3A/3B		-1364
		1A 1A 1B 1B		250 Vac 28 Vdc 250 Vac 48 Vdc
Alarm Switches	Used with control circuits and actuated only when the circuit breaker has tripped. Standard construction includes a normally-open contact. <b>Application</b> <ul style="list-style-type: none"> <li>• Max. Load = 10 A @ 125–250 Vac</li> <li>• Max. Load = 15 A @ 30 Vdc</li> <li>• Leads: (2) Red 18 AWG Cu</li> </ul>			

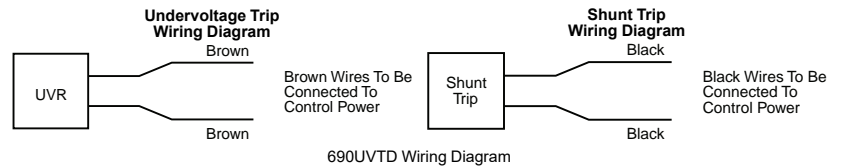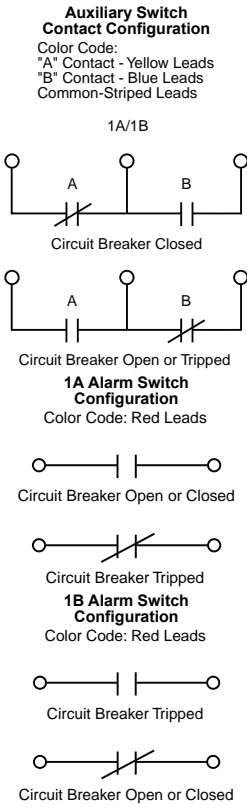

**3 MOLDED CASE CIRCUIT BREAKERS AND ENCLOSURES**


**Field-Installable Electrical Accessories**

Complete field-installable accessory catalog number by inserting suffix from page 3-13 between the parentheses in the catalog numbers shown in the table below. (Example: LA11212)

**Table 3.37: Field-Installable Accessories for Thermal-Magnetic and Electronic Trip Circuit Breakers**



Circuit Breaker	Shunt Trip	Ground-Fault Shunt Trip [1]	Undervoltage Trip	Auxiliary Switches	Alarm Switch
Miniature Circuit Breakers EH and EH-PL	Factory-Installed Only	Not Available	Not Available	Factory-Installed Only	Factory-Installed Only
LA, LH Series 4 [2]	LA1( )	LA1G	LA1 ( )	LA1( )	Factory-Installed Only Right Pole
Q4	LA1( )	LA1G	LA1 ( )	LA1( )	Factory-Installed Only Right Pole

**Table 3.38: Accessory Mounting Locations**



LA, LH, Q4 Series 4 circuit breakers or newer = Field-installable accessories  
Both accessory ports will accept shunt trips, UVRs and auxiliary switches. Alarm switches are factory installable **only** (right pole). Maximum of one device per port.


**Auxiliary Switch Contact Configuration**  
Color Code:  
"A" Contact - Yellow Leads  
"B" Contact - Blue Leads  
Common-Striped Leads



**1A Alarm Switch Configuration**  
Color Code: Red Leads




**1B Alarm Switch Configuration**  
Color Code: Red Leads



**Undervoltage Trip Wiring Diagram**



**Shunt Trip Wiring Diagram**



3 MOLDED CASE CIRCUIT BREAKERS AND ENCLOSURES

[1] Used with obsolete GP Ground-Censor™ system or add-on ground-fault modules.  
[2] With LA and LH top-feed circuit breakers (suffix MT, I-Line jaws on OFF end) all accessories must be factory installed.

**Electrical Operators**

Provides remote ON, OFF/RESET control of molded case circuit breakers.

- A complete line of field-installable electrical operators.
- Installing side mounted motor operators on non I-Line™ circuit breakers requires the use of a separate mounting pan.
- Side mounted electrical operators require an additional 4-1/2 in. (114 mm) of mounting space in I-Line installations.

When remote indication of circuit breaker status is required, order circuit breaker with 1A-1B auxilliary switch for ON-OFF Indication and alarm switch for TRIP Indication. Electrical operators require SPDT maintained contact switch. Refer to Class 9001 control unit listing for operators and pilot lights.

**NOTE:** Not available on Mag-Gard™ circuit breakers and molded case switches.

**Table 3.39: Electrical Operators**

Circuit Breaker Prefix	Top Mount		Side Mount		Mounting Pan Cat. No.
	Voltage	Cat. No.	Voltage	Cat. No.	
LA, LH, Q4	—	—	120 Vac	LAMO1	—
LAL, LHL, Q4L	—	—	120 Vac	LAMO1	LAMOP

**Handle Accessories**

**Table 3.40: Handle Accessories**

Circuit Breaker Prefix	Poles	Cat. No.
<b>Handle Tie</b>		
2 LA or 2 Q4	2, 3	LAHT
<b>Handle Extension</b>		
Q4	2, 3	AHEXLI
<b>Handle Padlock Attachment (locks ON or OFF)</b>		
LA, LH, Q4	2, 3	HPALM HPAXLM

**Cylinder Lock**

Used to lock the circuit breaker in the OFF position. Circuit breaker cannot be reset when locked OFF.

**Table 3.41: Cylinder Lock**

Circuit Breaker Prefix	Factory Installed Suffix	Field-Installable Cat. No.
LA, LAL, LH, LHL, Q4	Field-installable only	LA1CL

**Interlocks**

**Table 3.42: Walking Beam Mechanical Interlock Components [3]**

Circuit Breaker Prefix	Operator Suffix	Manually Operated		Electrically Operated		
		Walking Beam Ass'y.	Mounting Pan	Operator Suffix	Walking Beam Ass'y.	Mounting Pan
		Cat. No.	Cat. No.		Cat. No.	Cat. No.
LAL, LHL	WB	LA6WB	LAWBP6	WBMO	LA10WB	LAWBP10



Walking Beam Mechanical Interlock  
Requires 2 circuit breakers with WB suffix,  
1 walking beam assembly and 1 mounting pan.

3 MOLDED CASE CIRCUIT BREAKERS AND ENCLOSURES

3

[3] Fully enclosed interlocked units are available in Type 1 and Type 3R enclosures, with two neutrals provided in each enclosure. The completely enclosed assembly is not UL Listed. Please consult your nearest Schneider Electric sales office for more information.

Mechanical Lug Kits


Table 3.43: Mechanical Lug Kit Information



Circuit Breaker Application				(Number of Wires Per Lug) Wire Range [4]	Cat. No.	Lugs Per Kit
Standard	Ampere Rating	Optional	Ampere Rating			
Al Lugs for Use with Al or Cu Wire						
Q4, LA, LH	125–400 A	—	—	(1) 1 AWG–600 kcmil or (2) 1 AWG–250 kcmil	AL400LA	1
—	—	Q4, LA, LH	125–400 A	(1) 350–750 kcmil	AL400LH7	1
Cu Lugs for Use with Cu Wire Only [5]						
—	—	Q4, LA, LH	125–400 A	(1) 1 AWG–600 kcmil Cu or (2) 1 AWG–250 kcmil Cu	CU400LA	1

Compression Lug Kits

Table 3.44: Field-installable Compression Lug Kits [6]

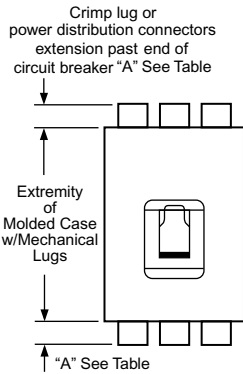

Circuit Breaker Type	Wire Range [4]	Dimension A (In)	Max. Lugs Per Terminal	Cat. No.	Lug Qty. Per Kit
Aluminum Compression Lug Kits					
LA, LH, Q4	250–350 kcmil	1.25	2	VC400LA35	2
	4 AWG–300 kcmil	1.0	2	VC400LA3	2
	2/0 AWG–500 kcmil	2.2	1	VC400LA5	1
	500–750 kcmil	2.5	1	VC400LA7	1
Copper Compression Lug Kits					
LA, LH, Q4	2/0 AWG–300 kcmil Cu	1.3	2	CVC400LA3	2
	250–500 kcmil Cu	2.3	1	CVC400LA5	1



Power Distribution Connectors (PDC) for Circuit Breakers—for Field Replacement of Mechanical Lugs

Can be used for multiple load connections on one circuit breaker. Use in place of standard distribution blocks to save space and time.

Field-installable kits, including tin-plated aluminum connectors and all necessary mounting hardware are available for Square D LA and Q4-frame molded case circuit breakers.

Connectors are UL Listed:

- For use on load end of circuit breaker only
- For use in UL508 Industrial Control applications only
- For use in UL 1995/CSA C22.2 No. 236 heating and cooling equipment
- For copper wire only

Table 3.45: Power Distribution Connectors for LAL, LHL, and Q4L Circuit Breakers


Use With Circuit Breaker [7]	Circuit Breaker Ampere Rating	Wires Per Terminal & Wire Range [8] Cu	Cat. No.	Lug Quantity Per Kit	Dimension A (in.)
LAL, LHL, Q4L	125–400 A	(6) 12–2/0 AWG	PDC6LA20	1	2.25
		(12) 14–4 AWG	PDC12LA4	1	1.25
		(3) 14–2 AWG (1) 2 AWG–250 kcmil	PDC4LA250	1	2.0



3 MOLDED CASE CIRCUIT BREAKERS AND ENCLOSURES

[4] Unless otherwise specified, wire sizes apply to both aluminum and copper conductors.  
 [5] Use suffix 8002 for factory-installed Cu lugs.  
 [6] See instruction bulletins for recommended tools.  
 [7] Not for use with I-Line circuit breakers.  
 [8] When using fine stranded wire, increased cross sectional area may cause maximum wire size to be reduced.





## Dimensions and Weights

**Table 3.46: Circuit Breakers Dimensions**

Circuit Breaker Catalog No. Prefix	No. Poles	Fig. No.	Dimensions—Inches							
			A	B	C	D	E	F	G	H
Q4L, LAL, LHL	2, 3	23	11.00	6.00	4.06	5.84	0.88	9.25	2.00	1.00

**Table 3.47: Shipping Weights**


Frame Size	Approx. Shipping Weight (Lbs.)
Q4L	15
LAL LHL	15

### Enclosed Molded Case Switches

Enclosed molded case switches are UL Listed devices supplied with factory-installed automatic molded case switch. Use the Cat. No. listed below and add the enclosure NEMA type suffix as noted in footnote in Table 3.48. An insulated groundable neutral, if required, must be ordered separately from Digest Section 7. Enclosed molded case switches are manufactured on order only.

**Table 3.48: Enclosed Molded Case Switches**

System	Ampere Rating	Cat. No. Add Suffix [1]	600 Vac Short Circuit Withstand Ratings
LH—400 A Frame, 3P, 600 Vac Max.			
2P	400	LHE26000( )	25 kA
3P	400	LHE36000( )	25 kA

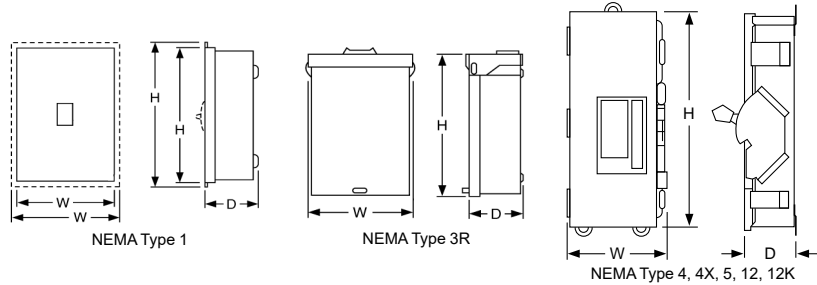

**Table 3.49: Enclosed Molded Case Switch Dimensions**


Cat. No. Prefix—Suffix	Series	Approximate Dimension					
		H		W		D	
		in.	mm	in.	mm	in.	mm
LHE—AWK	E05	42.25	1073	13.75	349	7.25	184
LHE—DS	E05	42.25	1073	13.75	349	7.25	184
LHE—F	A03	45.63	1159	16.50	419	6.50	165
LHE—R	A03	44.00	1118	15.38	391	7.88	200
LHE—S	E03	44.50	1130	15.38	391	6.50	165

### Lock-On Provisions

Lock-off provisions are standard on all NEMA Type 4, 4X, 5 stainless steel and NEMA Type 12, 12K circuit breaker enclosures. Provision for one inch hasp padlock is available factory installed. This modification will allow the circuit breaker to be locked in the ON position. When locked in the ON position, the external operator will not indicate if circuit breaker is tripped. UL Listed.

**Table 3.50: Enclosure**

Enclosure Prefix	Suffix for Lock-On Provision
FA, J, LA, L, M, P	SPLO

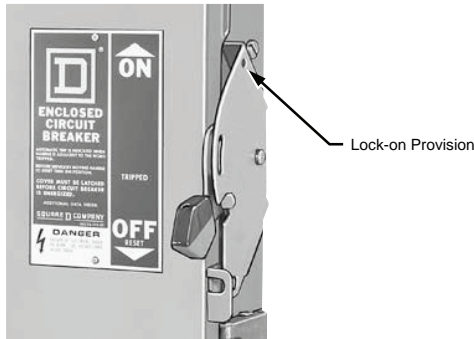

Lock-On Provision

### Pilot Light—Selector Switch—Push Button

Pilot lights, push buttons or selector switches are available factory installed in the cover of NEMA Type 4, 4X, 5 stainless steel or NEMA Type 12, 12K circuit breaker enclosures. Wiring to contact blocks is not available. Customer must furnish catalog number of device desired. Price = circuit breaker + enclosure + neutral + ground + pilot light, push button and/or selector switch + factory-installed adder. Order by description. L600 enclosures are UL Listed, other enclosures are not UL Listed.

### Phenolic Legend Plate

Available engraved and mounted on most circuit breaker enclosures. Legend engraved in 1/4-inch high white letters on black background. Customer must provide legend. UL Listed. Not available on NEMA Type 7 or 9 enclosures.

To order, add suffix NP to standard catalog number (i.e. LA400SNP).

[1] Add suffix S or F for NEMA 1 surface mounted or NEMA 1 flush mounted, respectively. Add suffix RB for NEMA 3R with bolt-on hub provision (FHE prefix only) or suffix R for NEMA 3R with a blank top endwall (LHE prefix only), respectively. Add suffix AWK for NEMA 12. Add suffix DS for NEMA 4/4X/5 stainless steel.



### Key Interlock Systems for Circuit Breaker Enclosures (Factory installed only.)

Interlocks are used to prevent the authorized operator from making an unauthorized operation. Available only on NEMA 4, 4X, 5, 12K, and 12/3R circuit breaker enclosures. The key interlock system is a simple and easy method of applying individual key interlock units and assemblies to the above equipment so as to require operation in a predetermined sequence. UL Listed.

#### Quoting


Contact local Field Sales office for catalog number, availability and pricing prior to quoting a job.

#### Ordering

Order cannot be released for production until the following information has been provided:

- End User—Company name, address
- Function of each lock (e.g., circuit breaker to be locked open with key removed, key held when circuit breaker is closed)
- Existing Equipment—if circuit breaker is to be interlocked with equipment already on site, provide brand of existing lock and key number
- Other New Equipment—if circuit breaker is to be interlocked with new equipment not yet installed at the site, then provide contact person and phone number so that locks may be coordinated
- Additional information may be required upon order entry

#### Diagram Symbols

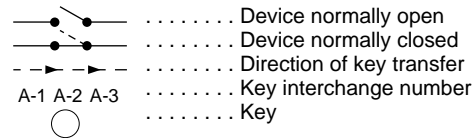

### Sample Application—1 (See Figure 1)

To prevent two devices from being closed simultaneously.

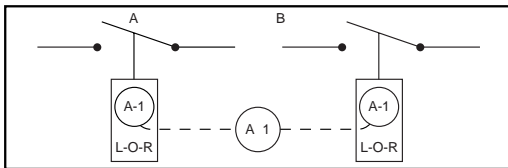


Figure 1

Two devices are shown in Figure 1. In operation they are not closed at the same time. With the interlocks arranged as shown only one key is required in the interlocking system. Both devices are shown open, therefore, the key is free. To close any one device the key is inserted and turned in that particular lock, the key is held in this lock until the device is again locked open. This simple interlocking sequence lends itself to a multitude of applications. The procedure is the same for two devices, neither of which is to be opened at the same time.

### Sample Application—2 (See Figure 2)

To prevent opening of switch A when circuit breaker B is closed.

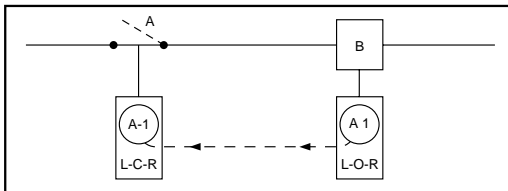


Figure 2

Switch A and circuit breaker B are in closed position. Key A-1 is held in circuit breaker B interlock.

- Open circuit breaker.
- Turn key A-1 in L-O-R interlock on circuit breaker B to lock open. Key A-1 is now free.
- Insert key A-1 in L-C-R interlock on switch A and turn to unlock.
- Open switch A. Key A-1 is now held. Reverse sequence to restore service.

### Sample Application—3 (See Figure 3)

To prevent operation of switch A when circuit breaker B is closed. Permits reclosing of circuit breaker for servicing when switch is locked open.

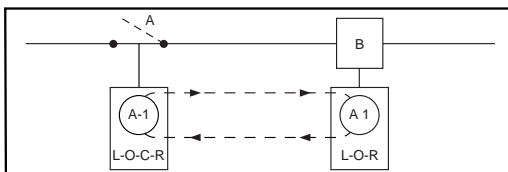


Figure 3

Switch A and circuit breaker B are in closed position. Key A-1 is held in circuit breaker interlock.

- Open circuit breaker.
- Turn key A-1 in L-O-R interlock on circuit breaker B to lock open. Key A-1 is now free.
- Insert key A-1 in L-O-C-R interlock on switch A and turn to unlock.
- Open switch A.
- Turn key A-1 in L-O-C-R interlock on switch A to lock open. Key A-1 is now free.
- Return key A-1 to circuit breaker interlock and unlock for operation during servicing period.

Reverse sequence to restore service.

**Sample Application—4 (Main-Tie-Main) (See Figure 4)**

To prevent paralleling of lines A and B.—Two loads, fed from either source.

Circuit breaker A is closed to supply load M. Circuit breaker B is closed to supply load N. Tie-circuit breaker C is open. Keys A-1 are held in interlocks on both circuit breakers A and B. Tie-circuit breaker C cannot be closed unless either A or B is locked open.

To transfer load N to circuit breaker A, proceed as follows:

- Open circuit breaker B.
- Turn key A-1 in L-O-R interlock on circuit breaker B to lock open. Key A-1 is now free.
- Insert Key A-1 in L-O-R interlock on tie-circuit breaker C and turn to unlock. Key A-1 is now held.
- Close tie-circuit breaker C.

Reverse sequence to restore service.

Load M can be supplied through circuit breaker B in a similar manner.

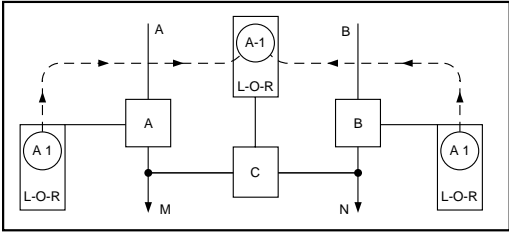


Figure 4