

CATALOG NUMBER

ECMBR1

electricCenter
ACCESSORIES

Main Breaker
Hold Down Kit

Same As:

- MBR1
- LX400HD
- EMBR1



INSTALLATION INSTRUCTIONS





⚠ DANGER

Hazardous Voltage.
Will cause death, serious injury
or substantial property damage.
Turn off power supplying this
equipment before working inside.


⚠ SAFETY INSTRUCTIONS

Note: This instruction outlines the recommended installation procedure. For use only where specified on panel label. Attach "main" label near main breaker or "service disconnect" label only when panel is used for service equipment.


1. Turn off and lock off the power supplying this equipment before working inside.
2. Insert main breaker retainer between poles of breaker. Push retainer up and slightly twist until emboss snaps in place.

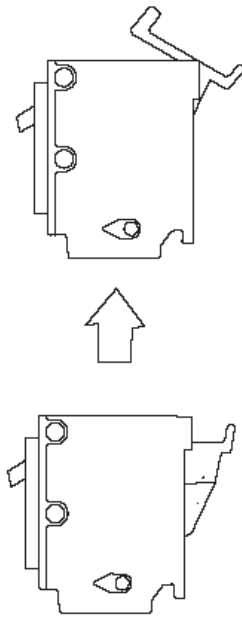

3. Push tail of retainer over and up in between poles of breaker.



4. Push breaker onto tabs.



5. Push top of retainer back flush with face of breaker. Tail of retainer will snap out from in between the breaker poles and lock the breaker in place.

Note: To remove breaker, bend breaker rail back and lift back (lug end) of breaker off, pull breaker from tabs.

Not for use on Siemens Ultimate load centers or Murray Rock Solid load centers.

© 2006 Copyright Siemens Industry, Inc.

Siemens Industry, Inc. Norcross, Georgia U.S.A. Assembled in Mexico

4810430 Rev.C