

SIEMENS

Rainproof Meter Module

Catalog Number
WCL2040B1T4RJ

Enclosure
Type 3R

Ratings: Main Bus Rating: 1200 Amps.
120/240 Volts AC, 1 Phase, 3 Wire
208Y/120 Volts AC (5th jaw may be required)
See adjacent label for Short Circuit Current Rating.

Meter Socket Rating: 200 Amps. Continuous

Panelboard Rating:
MB1: 175 Amps Max. **MB2:** 70 Amps Max.
See Breaker markings for wire sizes and torques.

Suitable For Use As Service Equipment when used in combination with Siemens Modular Terminal Box Series WMTB, WTB, or WET and no more than six main disconnecting means are provided.

For installation by a qualified person, in accordance with all local electrical codes and/or the National Electrical Code®.

General Information: See enclosed instruction sheet for information on mounting units.
Circuit breaker overload trip position is indicated by handle position midway between ON and OFF. To reset, move handle to OFF position then turn ON.

Important: Do not allow petroleum based (hydrocarbon) sprays, chemicals, solvents or any paint to contact interior components. Petroleum based chemicals can cause degradation of electrical insulating materials.

Siemens Industry, Inc. Norcross, Georgia U.S.A.

DH1

40900901 0101 Rev.A

® The National Electrical Code is a registered trademark of the National Fire Protection Association.
© 2013 Copyright Siemens Industry, Inc.

SIEMENS

Terminals:
Use Copper or Aluminum
Wire at all panel terminals.
Suitable for 60°/75°C Conductors..

Accessories	Cat. No.
1" Filler Plate	ECQF3
SubFeed Lug Kit	ECLK2125
SubFeed Lug Kit	ECLK2225
Neutral Lug Kit	ECLK1-2
Neutral Lug Kit	ECLK2
End Closure Plate	WMEP
Arc Flash Label	ECAFL

Terminal	Wire Size	Torque
N1	2/0 -#4 AWG	110 lb-in
Branch Breaker Terminals	See Markings on Breaker	
N1/Equip GND	#10 - #14 CU #10 - #12 AL #8 #6 - #4	20 lb-in 20 lb-in 25 lb-in 35 lb-in
Ground Conductors Only	(2) or (3) #14 AWG (2) #12-#10 AWG	20 lb-in 20 lb-in
Ground Bar/Neutral Lug Kits		
ECLK1-2	2/0 -#2 AWG	45 lb-in
ECLK2	2/0 -#4 AWG	135 lb-in

IMPORTANT - for use with:

Module Siemens Series#
Main Breakers (W)MC, WB, WEB, WXB
Switches WMP, WMS, WS, WES
Tap/Terminal Boxes . . . WMTB, WTB, WET, WT_PU
Pull Boxes WMMB
Meter Module (W)MM, WxMM, (W)MT, (W)ML, (W)MK
Meter Combinations . . . WC, WCL, WCT
Extension Box WMEX, WSP, WSPD
Bussed Elbow BE

Connect Modules Using:
QuickConnect Catalog No: QC1 Torque: 400-440 lb-in (35-36 ft.-lb.)
Single Bolt Joint Catalog No: SBJ1 Torque: 400-480 lb-in (35-40 ft.-lb.)


Siemens Industry, Inc. Norcross, Georgia U.S.A.

DH1

40900927 0101 Rev.A

© 2013 Copyright Siemens Industry, Inc.

LBP_WB1-1

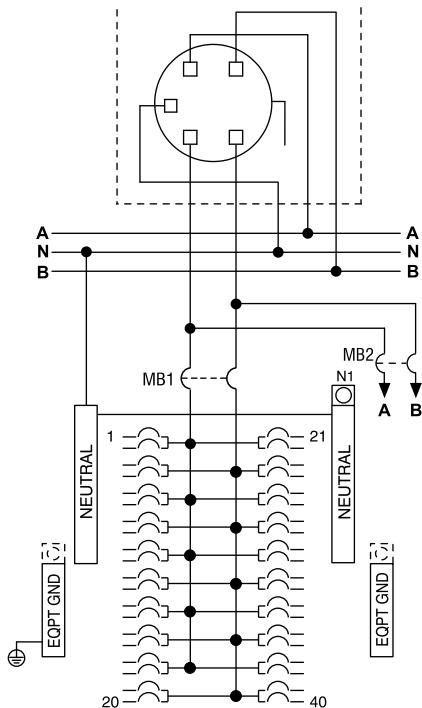

SIEMENS

Short Circuit Current Rating: (Wathour meter not included in short circuit current rating).

This panelboard has a maximum short circuit current rating of 100,000 Amps RMS symmetrical, 240 V~ maximum. The actual rating is dependent on the main disconnect, panelboard main, branch circuit breakers and auxiliary main combinations used as listed below. Any circuit breaker installed, replaced, or added in this panelboard must be manufactured by Siemens and must be of the correct Type as indicated in the tabulation below.

MAIN BREAKER	PANELBOARD MAIN (MB1)	BRANCH BREAKER	Then the maximum short circuit current rating in RMS symmetrical Amperes, 240 V~ maximum is	AUXILIARY MAIN (MB2)
When the main protecting the system is a	And the installed main breaker in this panelboard is a Siemens Type	And the branch breakers installed are Siemens type		And the installed auxiliary main is a Siemens Type
Siemens Breaker Types JXD2(-A), JD6(-A), JXD6(-A), LD6(-A), LXD6(-A), MD6, MXD6, ND6, NXD6, SND6-B, PD6, PXD6, SPD6-B, HPD6, HPXD6, SHPD6-B, RD6, RXD6	HFD6, HFXD6	QP, QPH, HQP, QT, QAF, QAFH, QAF2, QAF2H, HQAF2, QPF, QPFH, QE, QEH, QNR, QNRH, HQNR	65,000	
NONE USED				HED4
Siemens Breaker Types HJD6(-A), HJXD6(-A), HLD6(-A), HLXD6(-A), HMD6, HMXD6, HND6, HNXD6, SHND6-B, HPD6, HPXD6, SHPD6-B, HRD6, HRXD6, or Class J, T, R, or L Fuses	HFD6, HFXD6	QP, QPH, HQP, QT, QAF, QAFH, QAF2, QAF2H, HQAF2, QPF, QPFH, QE, QEH	100,000	

Warning: This equipment has been designed for use only with circuit breakers listed above. Use of other circuit breakers in this equipment could result in personal injury or property damage and may void the warranty.

Siemens Industry, Inc. Norcross, Georgia U.S.A.

DH1

40900800 0201 Rev.01

© 2019 Copyright Siemens Industry, Inc.