


**Note:**

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

**Part No.:**

**T36BN13LE7**

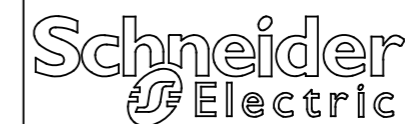

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 8773425173  
Email: CCC@us.schneider-electric.com

**Technical Information:**

Max. Continuous Current Rating: 600V / 18A  
 Certifications: UL Listed, CSA, CE  
 RoHS: Yes  
 Termination Method: Power Line: Screw Clamp, Power Load: Lug, Control Circuit: Screw Clamp  
 Weight (lbs): 5.92  
 Power Line Size (AWG): #8 - #18  
 Power Load Size (AWG): #4 - #14  
 Control Wire Size (AWG): #10 - #18  
 Thermal Overload Type: Motor Logic Solid State  
 Thermal Overload Trip Class: Class 10/20 Selectable  
 Mounting: Panel

**Specification:**

Description: TeSys N Sz 0 open starter, 3 pole, 208 VAC  
 Type: FVNR  
 Voltages Code: LE7 at 208Vac  
 Control Type: Common control  
 Coil Consumption: Inrush 70 VA  
 Sealed 7 VA

Single Phase			Three Phase		
115V	230V	200V	230V	460V	575V
1 HP	2 HP	3 HP	3 HP	5 HP	5 HP