

SPECIFICATIONS



Mechanical

Contact Retention Force: 1.96N(0.2 kgw) min.
Contact Matting Force: 39N (3.98 kgw) max.
Contact Unmatting Force With Eject Function: 18.5N max
Durability: 10000 cycles


Electrical

Current Rating: 0.75A max.
Insulation Resistance: 1000M Ω min. (Initial)
Dielectric withstanding voltage: 500 V AC RMS


Physical

Housing: LCP, UL 94V-0 rated
Contact: Phosphor Bronze
Operating Temperature: -55 to +85

1.0 mm [0.039"] Pitch
Express Card Socket
(Card Push series)
SMT Type
1CH4*+1CX4* Series, 26
Pos.



DRAWING

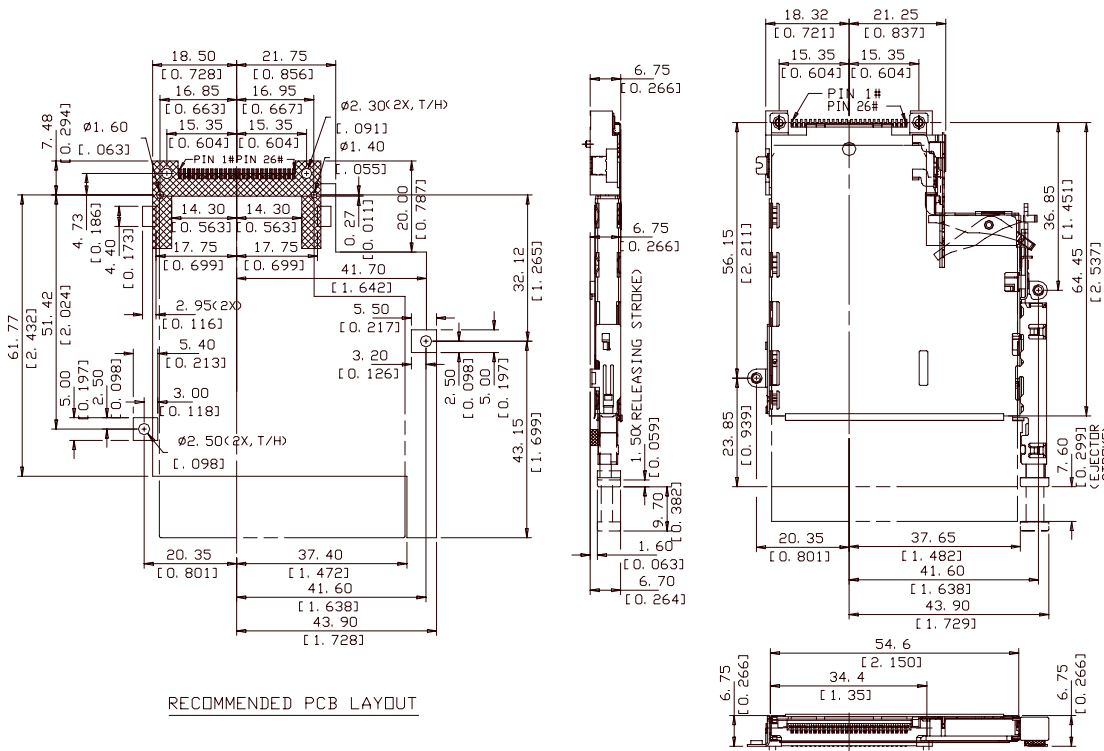

ORDERING INFORMATION

PRODUCT NO. : 1 C H 4 1 1 A W C - V A

CARD CONNECTOR	EXTENSION CODE
HEADER ONLY	(FOR HEADER ONLY)
VOLTAGE & TAIL TYPE	C: GOLD PLATING
4: 3.3V, 1 ROW	STANDOFF HEIGHT
DECK TYPE	AW: 1.05mm
1: NORMAL; SW & DW	(FOR HEADER ONLY)
	TAIL LENGTH
	1: SMT TYPE

PRODUCT NO. : 1 C X 4 1 1 A W 2 - F S

CARD CONNECTOR	EXTENSION CODE
EXPRESS CARD EJECTOR	(FOR EXPRESS CARD EJECTOR)
VOLTAGE & TAIL TYPE	EJECTOR TYPE
4: 3.3V, 1 ROW	2: PUSH BAR TYPE,
DECK TYPE	RIGHT HAND SIDE
1: NORMAL; SW & DW	STANDOFF HEIGHT
	AW: 1.05mm
	(FOR EXPRESS CARD EJECTOR)
	COVER TYPE
	1: W/ BOTTOM PLATE