

**SPECIFICATIONS**

**Mechanical**

**Contact Retention Force:** 1.00Kg min.

**Electrical**

**Voltage Rating:** 750V

**Current Rating:** 2.75A

**Contact Resistance:** 45mΩ max.

**Dielectrical Withstanding Voltage:** 1000V

**Insulation Resistance:** 1000MΩ min.

**Physical**

**Housing:** LCP, UL 94-0 rated, Ivory White

**Contact:** Phosphor Bronze

**Plating:** See "ORDERING INFORMATION"


**FUTURE BUS CONNECTOR**

**1F Series**


**Plug, Press Fit Type**

**2.0mm Pitch**

**4 Rows**



**DRAWING**

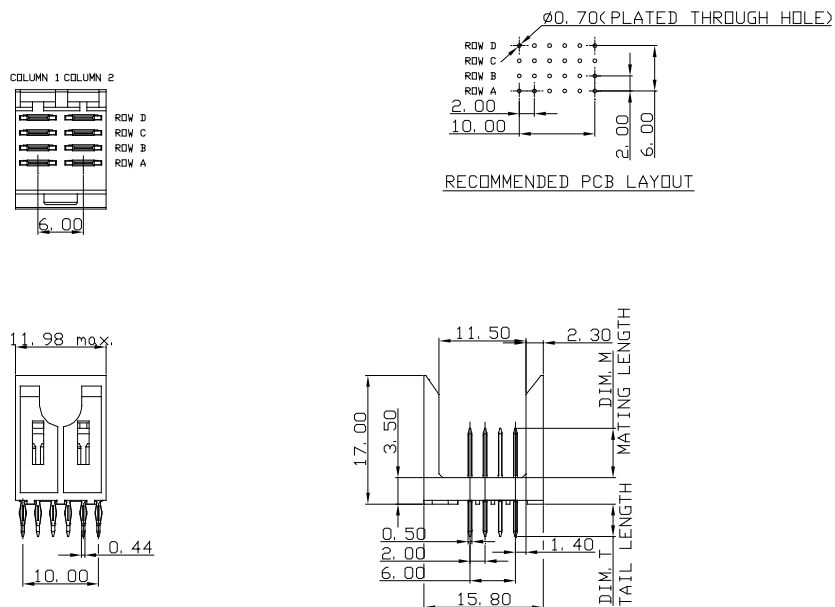

**ORDERING INFORMATION**

PRODUCT NO.: 1 F 1 3 0 0 8 \* - P \* \* 1 S \* - \* \*

- POS. NO.: \_\_\_\_\_
- 008=008 pos.
- Mating Area Plating: \_\_\_\_\_
- 1=GOLD FLASH
- 3=0.76um(30u")MIN. GOLD PLATING
- 5=1.27um(50u")MIN. GOLD PLATING
- 6=0.25um(10u")MIN. GOLD PLATING
- A=0.76um(30u")MIN. FPT PLATING,
- 0.25um(10u")MIN. GOLD INCLUDED
- D=1.27um(50u")MIN. FPT PLATING,
- 0.25um(10u")MIN. GOLD INCLUDED
- Tail Style: \_\_\_\_\_
- P=Press Fit
- Lead Free Code: \_\_\_\_\_
- N=None
- F=Lead Free
- Package Type: \_\_\_\_\_
- A=Tube
- Extension Code: \_\_\_\_\_
- N,T,L,M,S
- BODY STYLE \_\_\_\_\_
- Selective Pin Pattern \_\_\_\_\_
- (Detail Please Refer To Customer Drawing)