

SPECIFICATIONS


Mechanical
Contact Retention Force: 0.5Kg min.

Electrical
Electrical
Voltage Rating: 500V
Current Rating: 1A
Contact Resistance: 20mΩ max.
Dielectrical Withstanding Voltage: 750V
Insulation Resistance: 10000MΩ min.


Physical
Housing: PBT, UL 94-0, Gray
Contact: Phosphor Bronze
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55° to +125

HARD METRIC CONNECTOR

2H Series
Hard Metric Header Type A
Press Fit Type
2.0mm Pitch
5+2 Row

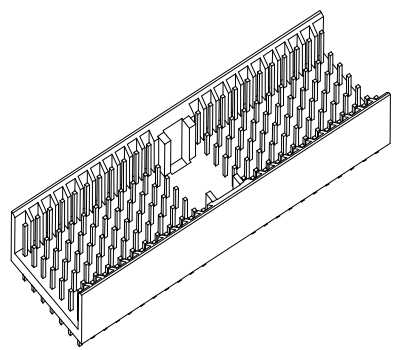

DRAWING

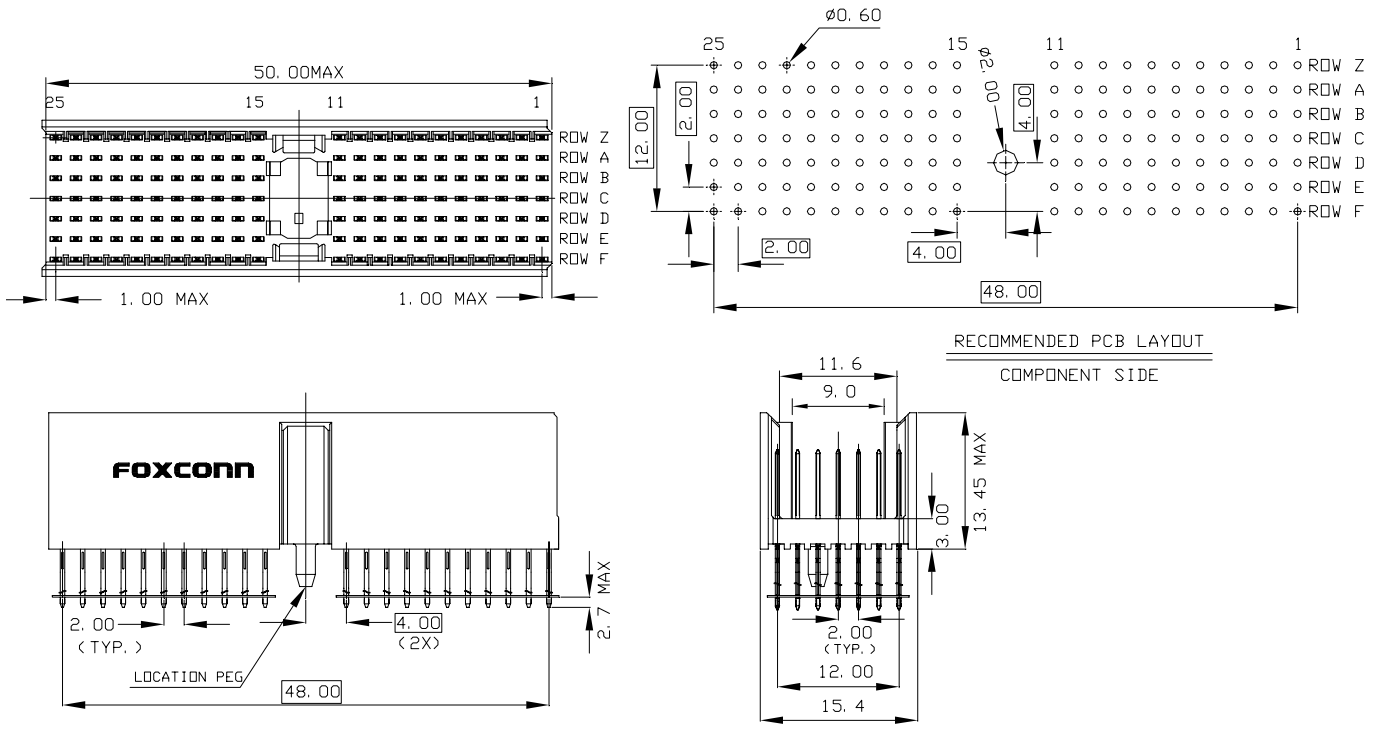

ORDERING INFORMATION

PRODUCT NO.: 2H1* * * * - * A * * *

Row No.	5:5 Row	7:5+2Row			
Column No.:	22:22 Column				Selective Pin Pattern
Location Peg:	0:W/O Location Peg	1:W/ Location Peg			Option For Tail Length and Hot Swap
Plating Spec.	1:Gold Flash	3:30u" (0.76um) FPT Plating	5:50u" (1.27um) Au Plating		Extension Code N, S, E, F