

SPECIFICATIONS

Constituent
 60POS. LFH + Raw cable + 25POS. D-sub

LFH Cable assembly

LFH Series
 60POS. LFH To 25POS. D-sub

Mechanical
 Retention Force between S/R and cable:50 lb min.


Electrical
 Insulation Resistance: 10MW min./500VDC
 Operating Current: 0.5Amp
 Impedance:100+/-10 W at 2MHz

Physical
 Overmold:PVC

Agency Approvals
 PVC:UL 94V-0 rated



DRAWING

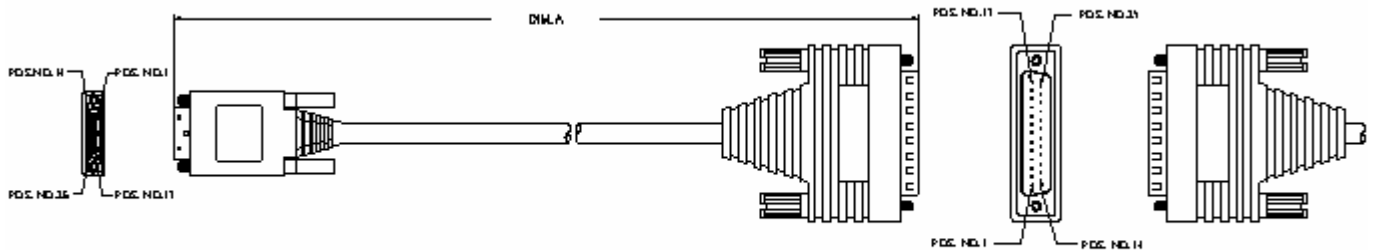

ORDERING INFORMATION

PRODUCT NO.: **CQ H60 NN XXX - XXX - YF**

CQ: Cable Assembly
 H60: J1 Connector LFH Series connector
 NN: Length of Cable
 XXX - XXX: J2 Connector Extension Code
 YF: Lead free
 J2 Connector Extension Code:
 V35=V.35 connector
 X21=X.21, D-Sub15 connector
 232=RS232, D-Sub25 connector
 449=RS449, D-Sub37 connector
 530=RS530, D-Sub25 connector

CQH6010530-019-YF	1022 [40,236]
CQH6010530-009-YF	3048 [120,000]
P/N	DIM. A