

SPECIFICATIONS

Constituent
Mini USB 4Pin to USB A Type

Electrical
Operating Voltage: 30V AC
Operating Current: 1A max.
Contact Resistance: 5 max.

Mechanical
MINI Conn. Mating Force: 2kg max., **Unmating Force:** 0.4~2 kg
USB Conn. Mating Force: 3.5kg max., **Unmating Force:** 1.0kg min.

Physical
Color: Black
Operating Temperature: 0 °C to +60 °C


Agency Approvals
Raw Cable: UL 2835
Cable Assembly: UL E93839

USB Cables

CUHD4 Series
Mini USB 4 Pos. Cable



DRAWING

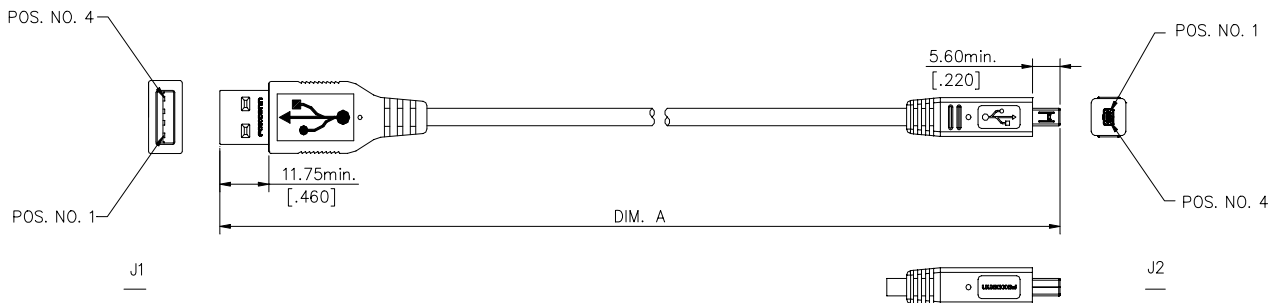

ORDERING INFORMATION

PRODUCT NO.: CU H D 4 ** B - P01

USB Cable
 Mini USB B type
 Dual Shielding
 4=4Pin
 Extension Code
 USB A type
 Length of Cable(feet)
 03=3feet
 06=6feet
 10=10feet

CUHD410B-P01	3000 [118.11]
CUHD406B-P01	2000 [78.74]
CUHD403B-P01	1000 [39.37]
P/N	DIM. A