

## SPECIFICATIONS

## USB Cables

**Constituent**  
**USB Type A + Mini USB 5Pin**

**CUHD5 Series**  
**Mini USB 5 Pos. Cable**

**Electrical**  
**Operating Voltage: 30V AC**  
**Operating Current: 1 A max.**  
**Contact Resistance: 5 max.**


**Mechanical**  
**USB Mating Force: 3.5kg max.; Unmating Force: 1.0kg min.**

**Physical**  
**Color: Black**  
**Operating Temperature: 0 °C to 60 °C**

**Agency Approvals**  
**Raw Cable: UL 2835**  
**Cable Assembly: UL E93839**



## DRAWING

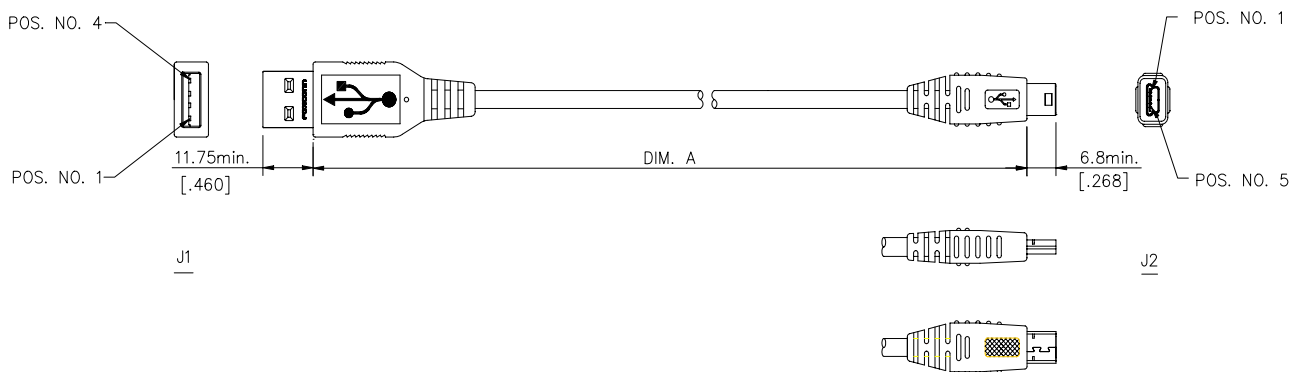

## ORDERING INFORMATION

PRODUCT NO.: **CU H D 5 \*\* B - P01**

USB Cable ————  
 Mini USB B Type ————  
 Dual Shielding ————  
 5=5Pin  
 \*\*  
 B ————  
 Extension Code ————  
 USB A Type ————  
 Length of Cable(feet)  
 03=3feet  
 06=6feet  
 10=10feet  
 P01

CUHD510B-P01	3000 [118.11]
CUHD506B-P01	2000 [78.74]
CUHD503B-P01	1000 [39.37]
P/N	DIM. A