

# Ribbon Cables

## SPECIFICATIONS

**Constituent**  
**IDE Cable Assembly for Hard Disc or CD-ROM**


**FC40 Series**  
**IDE Cable, 3 Drops**

**Mechanical**  
**Contact Insertion Force: 340g max. per Contact**  
**Contact Withdrawal Force: 43g min. per Contact**


**Electrical**  
**Current Rating: 1A**  
**Voltage Rating: 120V**

**Physical**  
**Housing, Cover & Strain Relief: PBT, UL94V-0 rated**  
**Contact: Phosphor Bronze, Gold Plated**  
**Operation Temperature: -20 °C to +105 °C**

**Agency Approvals**  
**Cable: UL 2651; Conn.: E93750; Cable Assembly: E98386**

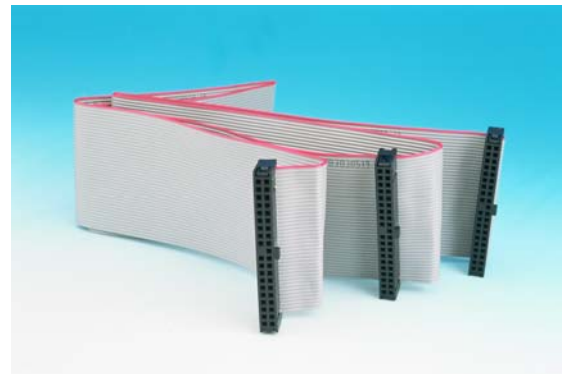

## DRAWING

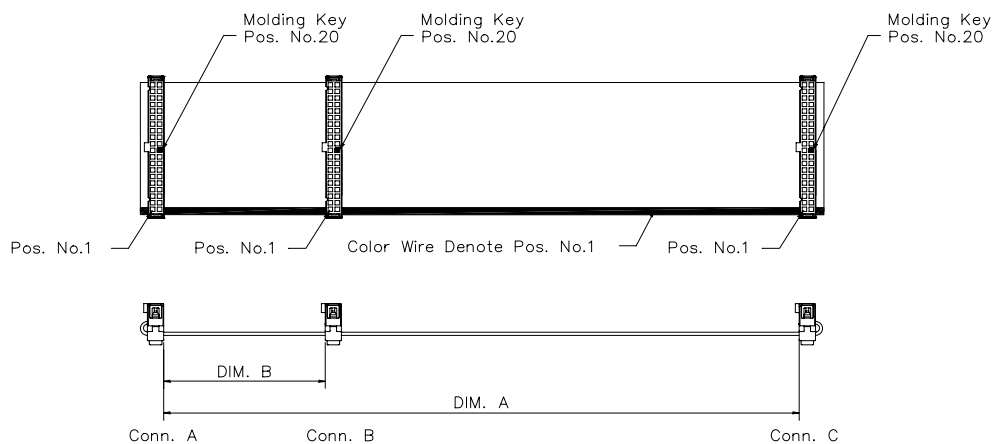

## ORDERING INFORMATION

PRODUCT NO.: **F C 40 \*\*\* - \*\***

Flat Cable — F C  
 40 Pos — 40  
 Run On# — \*\*\*  
 Extension Code — \*\*

FC40002-PW	457.2 [18]	152.4 [6]
P/N	DIM.A	DIM.B