

Internal Wire Harness Specification

Constituent
11 PIN CONN+WIRE + 11 PIN CONN

Wite Harness Series 1.50 Pitch Housing To 1.5 Pitch Housing

Mechanical

Insertion Force: 0.8Kgf MAX PER CONTACT Retention Force: 0.1kgf MIN PER CONTACT.

Electrical

Insulation Resistance: 10 MEGAOHMS MIN / 500V DC/AC.

Contact Resistance: 3 OHMS MAX

Physical

Cable: Wire Harness cable


Agency Approvals

Housing:PA66 V0

Contact:Phosphor Bronze



DRAWING

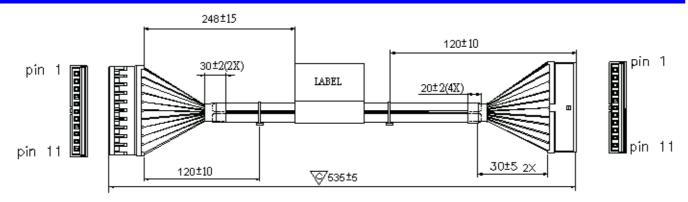

ORDERING INFORMATION

