

SPECIFICATIONS

Mechanical

Mating Force: 4Kg (8.8Lb) max.
Unmating Force: 0.3~4Kg (0.66~8.8Lb)
Durability: 5000 Cycles

Electrical


Current Rating: 0.3A
Contact Resistance: 30MW max. (initial), 60MW max. (after life test)
Dielectric Withstanding Voltage: 500V AC min.
Insulation Resistance: 100MW min.

Physical


Housing: Thermoplastic, UL 94V-0 rated
Contact and Shell: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -40 to +85

RCA JACK Connector

RCA JACK Series
Right Angle, T/H Type
6 Pos.



DRAWING

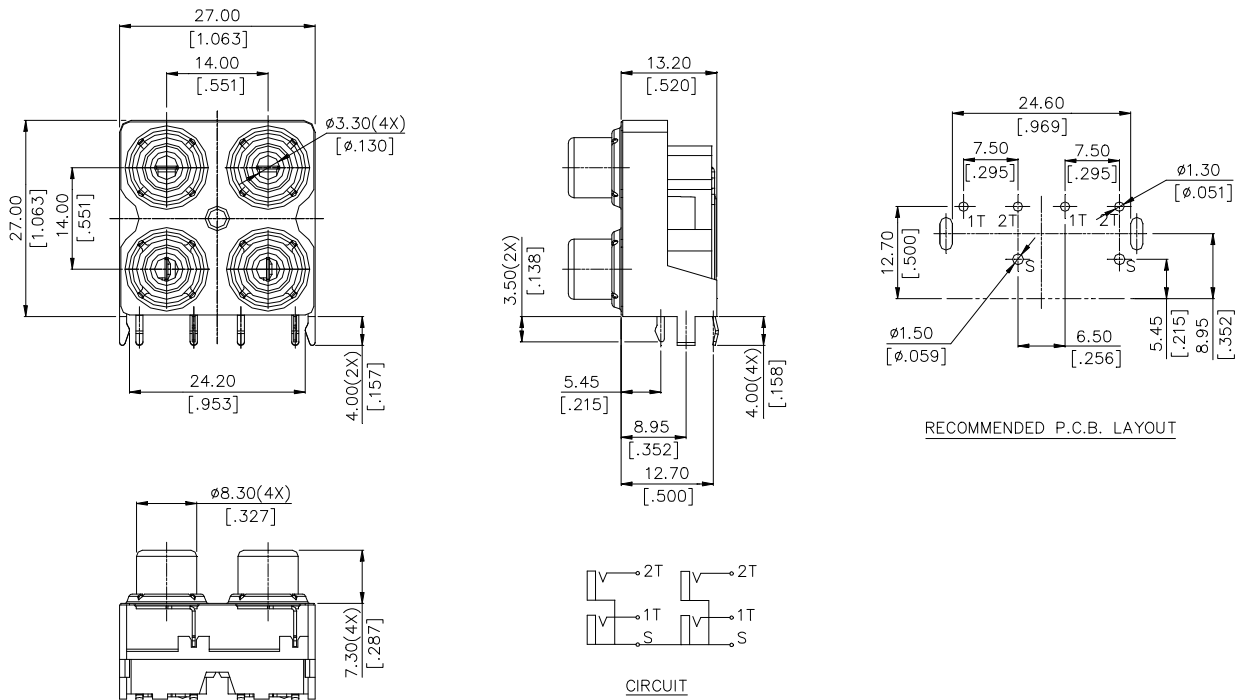

ORDERING INFORMATION

PRODUCT NO.: JR 1 1 0 3 0 - W 5 6 1 - 4 F

- RCA JACK
- Termination Type
1=Right Angle
- Contact Type
1= Female
- Switch Function
0=w/o Switch
- Plut Diameter
3=ø3.20mm
- Lead Free Code
F=Lead free
- Package Code
4=Soft Tray
- Modification Code
- Ring Color
See Color Layout
- Body Type
5=2*2
- Customer Code
w=All Customer
- Contact Plating
0=150u" Sn

JR11030-W561-4F	RED	RED
	WHITE	WHITE
P/N	A	B
	C	D
COLOR LAYOUT (LEFT TO RIGHT, UP TO DOWN)		