

SPECIFICATIONS

FUTURE BUS CONNECTOR

**HSSDC CONNECTOR
8POS. REC. TYPE**

Mechanical


Insertion Force: 10 lb MAX.
Extraction Force: 1 lb MIN.
DURABILITY: 500 CYCLES

Electrical


Current Rating: 0.5A
Low Level Contact Resistance: 30mΩ max.
Dielectrical Withstanding Voltage: 500V
Insulation Resistance: 1000MΩ min.

Physical

Housing: Thermo Plastic, Black
Contact: Copper Alloy
Top Shell: Copper Alloy
Bottom Shell: Copper Alloy
Spacer: Thermo Plastic, Black
Plating: See "ORDERING INFORMATION"

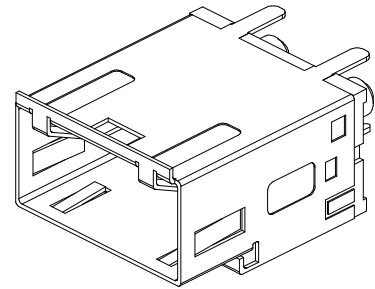

DRAWING

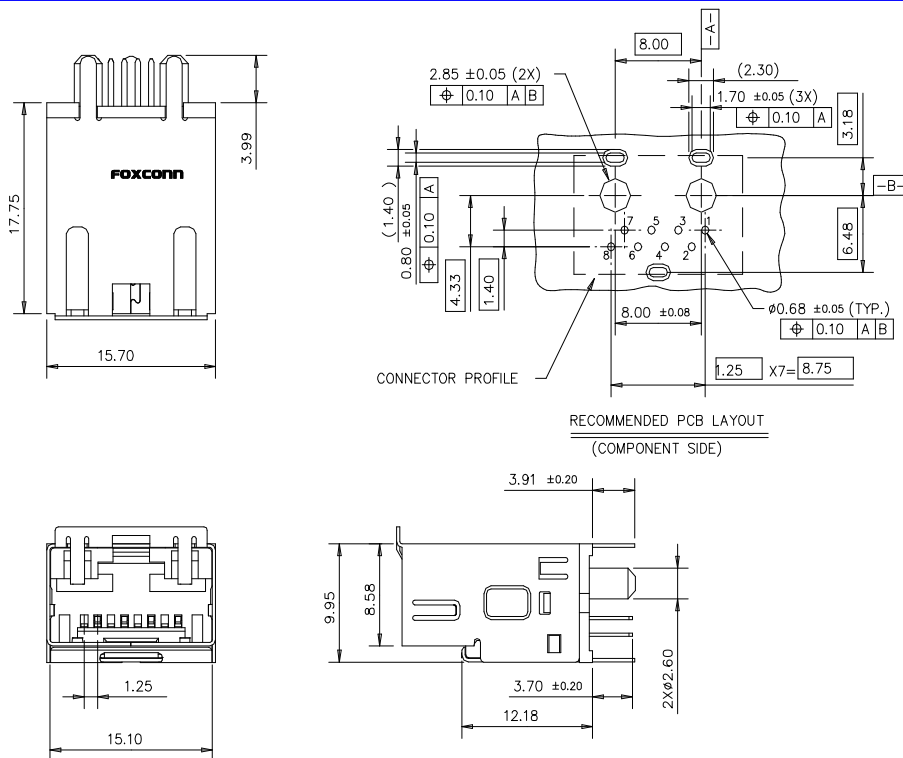

ORDERING INFORMATION

PART LIST

VFC01083-501

3=30u" GOLD PLATING