


SPECIFICATION SHEET

# ABB Welcome™

## M251021K-x Keypad module


M251021P3  
M251021P4

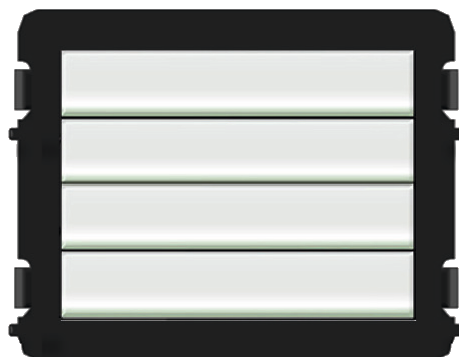

Simple module is available in 3 and 4 row pushbuttons. The buttons can be configured for a single purpose i.e., call apartment, call guard unit, or to turn on the light. One 3 button module can be configured to call 6 apartments.

### Key features

- Nameplates can be extracted without dismantling the outdoor station.
- Backlight ensures clear visibility at night.
- Pushbuttons can be configured to call 2 addresses or functions.

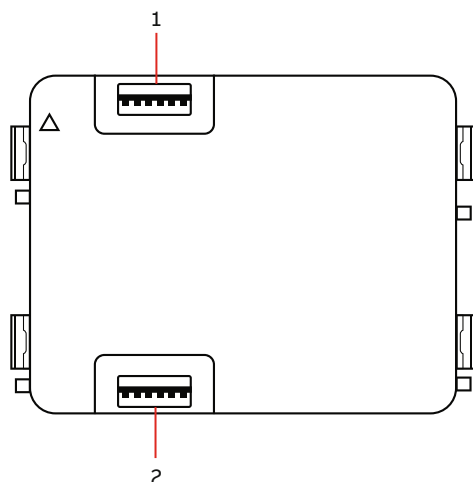

### Functions

1. Connector to previous module
2. Connector to next module

---

**Specifications**

Operating temperature	-40 °F to + 158 °F
Ingress protection	IP54
Bus voltage	20-30 VDC (From system controller or system component configured as local power supply through audio module)
Product dimensions	2.83" x 3.82" x 0.98"

---

**ABB Inc.**  
Electrification Products  
860 Ridge Lake Boulevard  
Memphis, TN 38120  
[www.abb.com/door-entry-system-us](http://www.abb.com/door-entry-system-us)

**[electrification.us.abb.com](http://electrification.us.abb.com)**

---

USA Technical Support: 888-862-3289  
7:00 a.m. to 5:00 p.m., CST, Monday - Friday  
[eppc.support@us.abb.com](mailto:eppc.support@us.abb.com)

USA Technical Support: 888-862-3289  
7:00 a.m. to 5:00 p.m., CST, Monday - Friday  
[eppc.support@us.abb.com](mailto:eppc.support@us.abb.com)

---

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc.  
© 2021 ABB All rights reserved.