




ABB Motors and Generators		Technical Data Sheet				
Department/Author		Project	Location		Item name	
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages	
		A	12/22/2017	untitled.xls	1.00007 1(3)	
No.	Definition	Data	Unit	Remarks		
1	Product	<b>TEFC, 3-phase, squirrel cage induction motor</b>				
2	Product code	<b>E3BA 355 SMA6-ADCIN</b>				
3	Type/Frame	<b>E3BA355SMA6</b>				
4	Mounting	<b>IM1001, B3(foot)</b>				
5	Rated output $P_N$	<b>160</b>	kW			
6	Service factor	<b>1</b>				
7	Type of duty	<b>S1 100%</b>				
8	Rated voltage $U_N$	<b>415</b>	VD	+10, -10 %		
9	Rated frequency $f_N$	<b>50</b>	Hz	+5, -5 %		
10	Rated speed $n_N$	<b>989</b>	r/min			
11	Rated current $I_N$	<b>277</b>	A			
12	Method of starting	<b>DOL</b>				
13	Starting current $I_s/I_N$	<b>7.7</b>				
14	Nominal torque $T_N$	<b>1545</b>	Nm			
15	Locked rotor torque $T_s/T_N$	<b>2.6</b>				
16	Maximum torque $T_{max}/T_N$	<b>2.8</b>				
17						
18						
Load characteristics		Load %	Current A	Efficiency %	Power factor	
19	PLL determined from residual loss	100	277	95.6 / IE3	0.84	
20		75	218	95.6	0.8	
21		50	167	93.6	0.71	
22						
23	Thermal withstand time hot	<b>43</b>	s			
24	Thermal withstand time cold	<b>108</b>	s			
25	Insulation class / Temperature class	<b>F / B</b>				
26	Ambient temperature	<b>50</b>	°C			
27	Altitude	<b>1000</b>	m.a.s.l.			
28	Degree of protection	<b>IP55</b>				
29	Cooling system	<b>IC411 self ventilated</b>				
30	Bearing DE/NDE	<b>6322/C3 - 6319/C3</b>				
31	Sound pressure level (LP dB(A) 1m)	<b>85</b>	dB(A)	at no-load		
32	Moment of inertia $J = \frac{1}{4} GD^2$	<b>10.925</b>	kg-m <sup>2</sup>			
33	Position of terminal box	<b>Top</b>				
34	Direction of rotation	<b>Bi-directional</b>				
35	Total weight of motor	<b>1670</b>	kg			
36						
37						
38						
39						
40						
41						
42						
43						
44						
45						
Ex-motors						
46						
47						
48						
<b>Option Variant Codes / Definition</b>						
49	Application check not made in absence of load details.					
50	Efficiency level : IE3 as per IS12615 2018.					
51						
52						
Remarks:						
Data based on situation 10/2/2014						

All performance values are subject to IS/IEC tolerances


<b>ABB Motors and Generators</b>	<b>Load Curves</b>		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name <b>1.00007</b>
Our ref.	Rev/Changed by <b>A</b>	Date of issue <b>12/22/2017</b>	Saving ident <b>untitled.xls</b>
			Pages <b>2(3)</b>

**Product** TEFC, 3-phase, squirrel cage induction motor  
**Type/Frame** E3BA355SMA6  
**Product code** E3BA 355 SMA6-ADCIN  
**Rated output P<sub>N</sub>** 160 kW  
**Type of duty** S1 100%


**Voltage (V)** 415                      **Current I<sub>N</sub> (A)** 277                      **Power factor at P<sub>N</sub>** 0.84  
**Frequency (Hz)** 50                      **Speed (r/min)** 989                      **Efficiency (%) at P<sub>N</sub>** 95.6

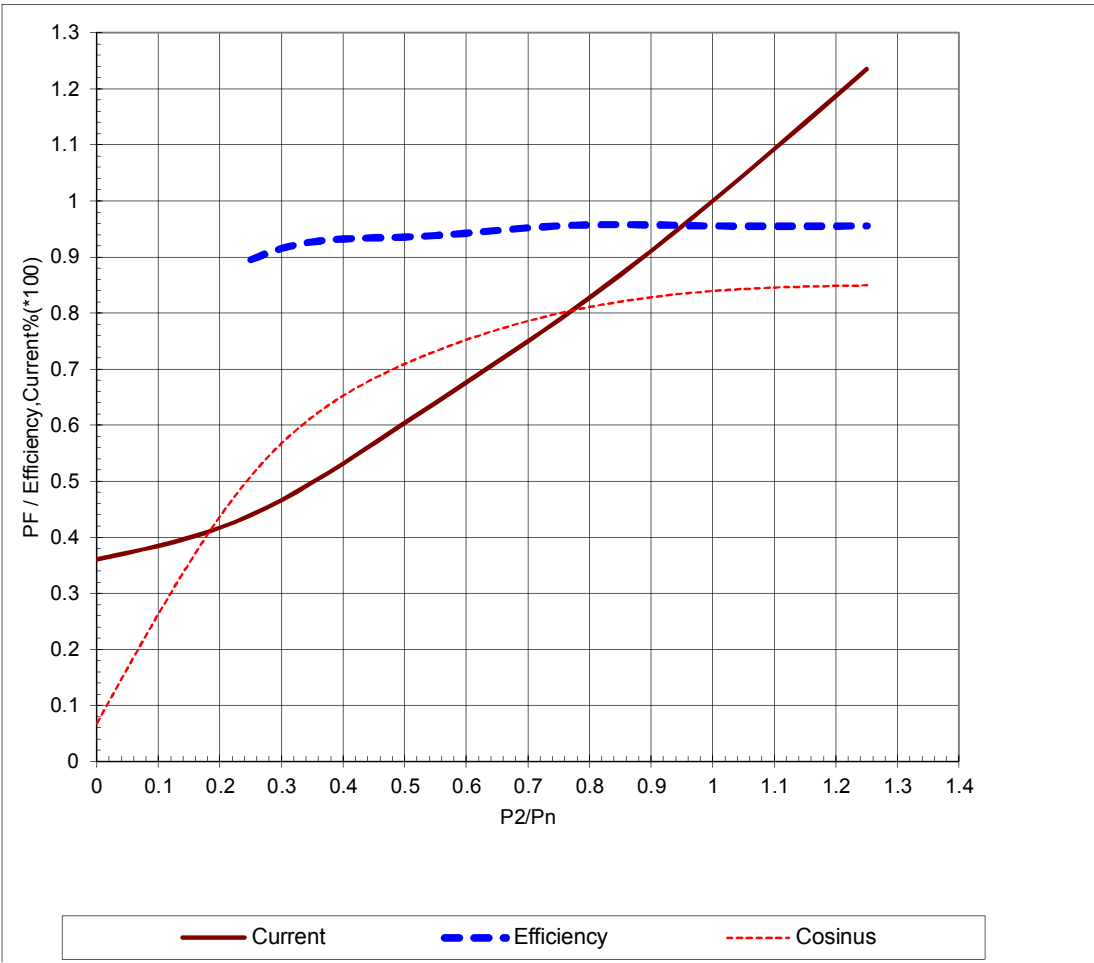

Data based on situation 10/2/2014  
 All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004


<b>ABB Motors and Generators</b>	<b>Starting Curves</b>		
	Project	Location	
Department/Author	Customer name	Customer ref.	Item name <b>1.00007</b>
Our ref.	Rev/Changed b Date of issue <b>A 12/22/2017</b>	Saving ident <b>untitled.xls</b>	Pages <b>3(3)</b>
Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
Type/Frame	<b>E3BA355SMA6</b>		
Product code	<b>E3BA 355 SMA6-ADCIN</b>	Frequency (Hz)	<b>50</b>
Rated output P <sub>N</sub>	<b>160 kW</b>	Rated current I <sub>N</sub>	<b>277 A</b>
Type of duty	<b>S1 100%</b>		

J <sub>motor</sub> (kgm <sup>2</sup> )	<b>10.9</b>	Voltage (V) 100%	<b>415</b>	Voltage (V)	<b>332V(80%)</b>
J <sub>load</sub> (kgm <sup>2</sup> )		T <sub>start</sub> /T <sub>N</sub>	<b>2.6</b>	T <sub>start</sub> /T <sub>N</sub>	<b>1.5</b>
Speed (r/min)	<b>989</b>	Starting time (s)	<b>0.3</b>	Starting time (s)	<b>0.6</b>
T <sub>N</sub> (Nm)	<b>1545</b>	Speed (r/min)	<b>988</b>	Speed (r/min)	<b>980</b>
T <sub>load</sub> (Nm)		I <sub>s</sub> /I <sub>N</sub>	<b>7.7</b>	I <sub>s</sub> /I <sub>N</sub>	<b>5.9</b>
		T <sub>max</sub> /T <sub>N</sub>	<b>2.8</b>	T <sub>max</sub> /T <sub>N</sub>	<b>1.8</b>

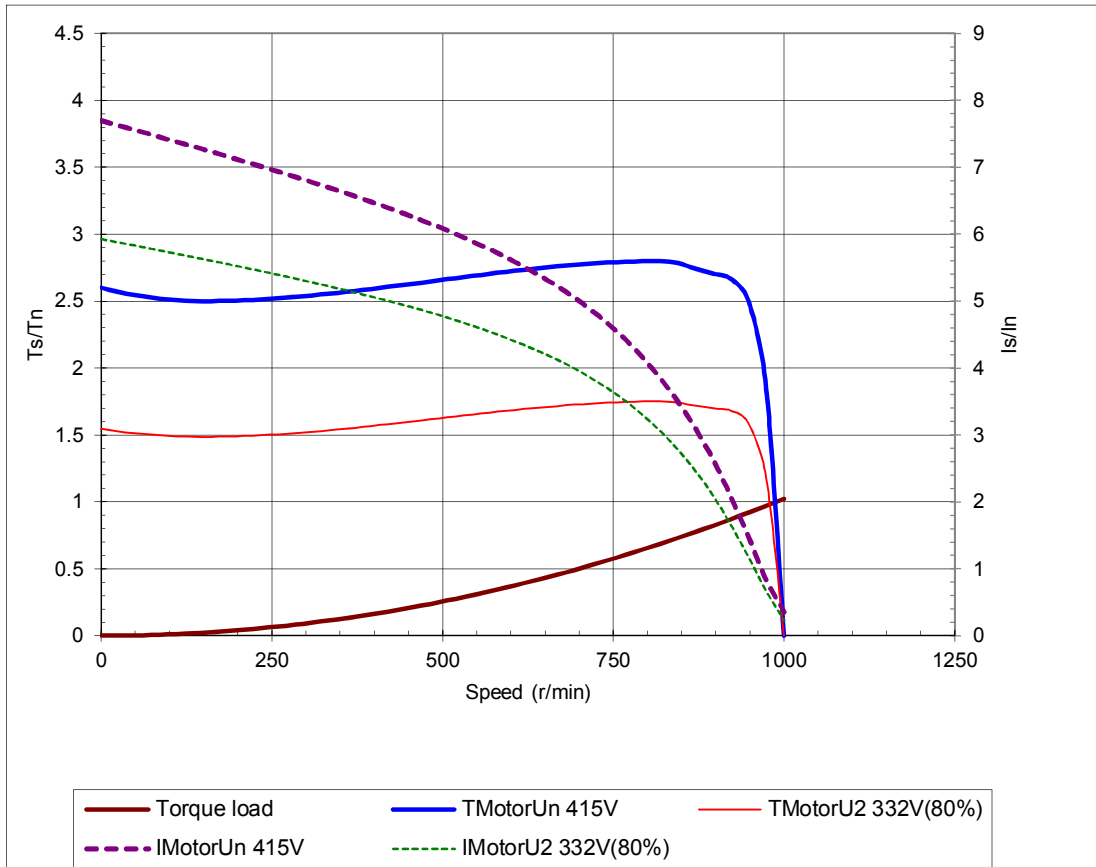

Data based on situation 10/2/2014

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004

ABB Motors and Generators	Current & Speed Vs Time			
	Project	Location		
Department/Author	Customer name	Customer ref.	Item name <b>1.00007</b>	
Our ref.	Rev/Changed b Date of issue <b>A 12/22/2017</b>	Saving ident <b>untitled.xls</b>	Pages <b>4(3)</b>	
Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>			
Type/Frame	<b>E3BA355SMA6</b>			
Product code	<b>E3BA 355 SMA6-ADCIN</b>	Frequency (Hz)	<b>50</b>	
Rated output $P_N$	<b>160 kW</b>	Rated current $I_N$	<b>277</b>	A
Type of duty	<b>S1 100%</b>			
$J_{motor}$ (kgm <sup>2</sup> )	<b>10.9</b>	Voltage (V) 100%	<b>415</b>	Voltage (V) <b>332V(80%)</b>
$J_{load}$ (kgm <sup>2</sup> )		$T_{start}/T_N$	<b>2.6</b>	$T_{start}/T_N$ <b>1.5</b>
Speed (r/min)	<b>989</b>	Starting time (s)	<b>0.3</b>	Starting time (s) <b>0.6</b>
$T_N$ (Nm)	<b>1545</b>	Speed (r/min)	<b>988</b>	Speed (r/min) <b>980</b>
$T_{load}$ (Nm)		$I_s/I_N$	<b>7.7</b>	$I_s/I_N$ <b>5.9</b>
		$T_{max}/T_N$	<b>2.8</b>	$T_{max}/T_N$ <b>1.8</b>


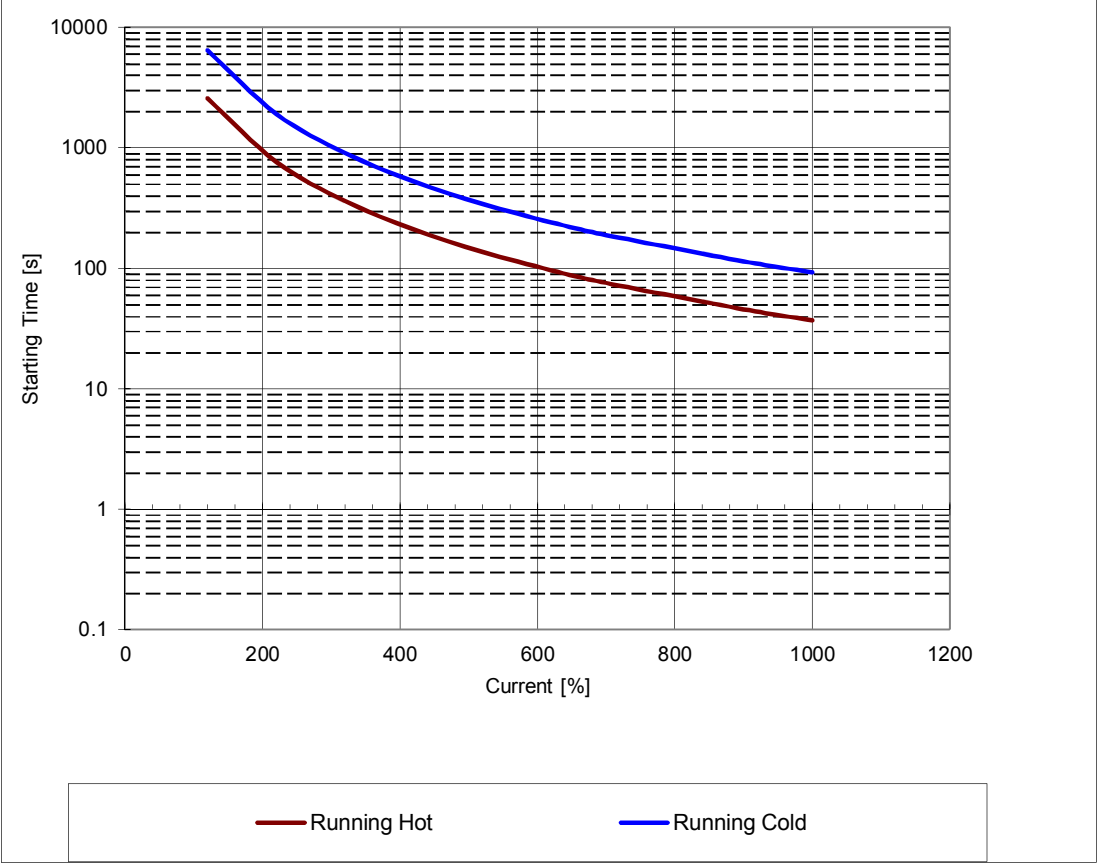
  

Speed [rpm] vs Starting Time [s] and Current [A]

Legend: — Speed [rpm] (red line), — Current [A] (blue line)

Data based on situation 10/2/2014

All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004

<b>ABB Motors and Generators</b>	<b>Thermal Withstand Curve</b>			
	Project	Location		
Department/Author	Customer name	Customer ref.		Item name <b>1.00007</b>
Our ref.	Rev/Changed b	Date of issue	Saving ident	Pages
	<b>A</b>	<b>12/22/2017</b>	<b>untitled.xls</b>	<b>5(3)</b>
Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>			
Type/Frame	<b>E3BA355SMA6</b>			
Product code	<b>E3BA 355 SMA6-ADCIN</b>	Frequency (Hz)	<b>50</b>	
Rated output P <sub>N</sub>	<b>160 kW</b>	Rated current I <sub>N</sub>	<b>277</b>	<b>A</b>
Type of duty	<b>S1 100%</b>			
J <sub>motor</sub> (kgm <sup>2</sup> )	<b>10.9</b>	Voltage (V) 100%	<b>415</b>	Voltage (V) <b>332V(80%)</b>
J <sub>load</sub> (kgm <sup>2</sup> )		T <sub>start</sub> /T <sub>N</sub>	<b>2.6</b>	T <sub>start</sub> /T <sub>N</sub> <b>1.5</b>
Speed (r/min)	<b>989</b>	Starting time (s)	<b>0.3</b>	Starting time (s) <b>0.6</b>
T <sub>N</sub> (Nm)	<b>1545</b>	Speed (r/min)	<b>988</b>	Speed (r/min) <b>980</b>
T <sub>load</sub> (Nm)		I <sub>s</sub> /I <sub>n</sub>	<b>7.7</b>	I <sub>s</sub> /I <sub>n</sub> <b>5.9</b>
		T <sub>max</sub> /T <sub>n</sub>	<b>2.8</b>	T <sub>max</sub> /T <sub>n</sub> <b>1.8</b>
				
<p>Data based on situation 10/2/2014</p> <p>All data subject to tolerances in accordance with IS/IEC 60034-1 : 2004</p>				