

## Simplicity™ Premium SLED & SPLED Series

Premium die-cast aluminum and laser-etched acrylic edge-lit exit sign



### Construction

- Universal mount housing models use (D) dome and (P) pyramid, trim plate, trim ring and canopy made of die-cast aluminum
- Fully recessed only mount housing with (Z) flat trim plate includes steel back-box and hanger bars
- U-shaped clear acrylic legend panel features laser-etched letters and chevrons
- 6 inch EXIT lettering legend, available in red or green
- 8 inch EXIT lettering legend, available in red
- Choice of finishes: white, black or brushed aluminum, dark bronze, polished brass, polished chrome and painted


### Mounting

- (D) Dome and (P) pyramid trim models modular design allows for surface, wall, end or ceiling mount, as well as, recessed wall or ceiling applications
- (D) Dome and (P) pyramid trim models include a canopy for surface wall, end or ceiling mount and for recessed wall or ceiling applications a trim ring and hanger bars for installation into t-bar grid
- (D) Dome and (P) pyramid trim models housing is brushed aluminum with conduit knock-out 1/2", top back and end
- (Z) Flat trim models are for RECESS MOUNTING ONLY and can not be used for surface mount applications
- (Z) Flat trim models include a unfinished steel back-box and hanger bars for installation into ceiling and t-bar grid

### Housing color



Brushed aluminum



White



Black

Dark bronze  
(painted)

Polished brass



Polished chrome

### Chevrons

Chevron  
right (R)  
single faceChevron  
left (L)  
single faceSingle face, double  
chevron (1D) double face,  
double chevron (2D)Double face, single chevron (RL)  
represents each side of a double  
face panel.

### Special wording panels

Available. Contact your sales representative with your design requirements

### Electronics

- Optional Improved Diagnostics
- Optional Nexus® monitoring system
- 120-277 60Hz

### Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards
- ROHS compliant
- E-California Energy Commission Title 20

**Warranty** (subject to proper installation and maintenance)

Unit has a Five-year limited warranty

Detailed warranty terms located on **page 197** or online at: [www.lightalarms.com](http://www.lightalarms.com)



nexus



### Trim plates



(D) Dome Trim Plate



(P) Pyramid Trim Plate




(Z) Flat Trim

(D) Dome Trim Plate and (P) Pyramid Trim Plate photo/text  
(D) & (P) trims used with universal surface and recess mount  
housing models


For recess mount  
applications ONLY  
(housing is not universal)

**Dimensions** (Dimensions are approximate and subject to change):

**Mounting applications available with dome (D) and pyramid (P) trim plates**

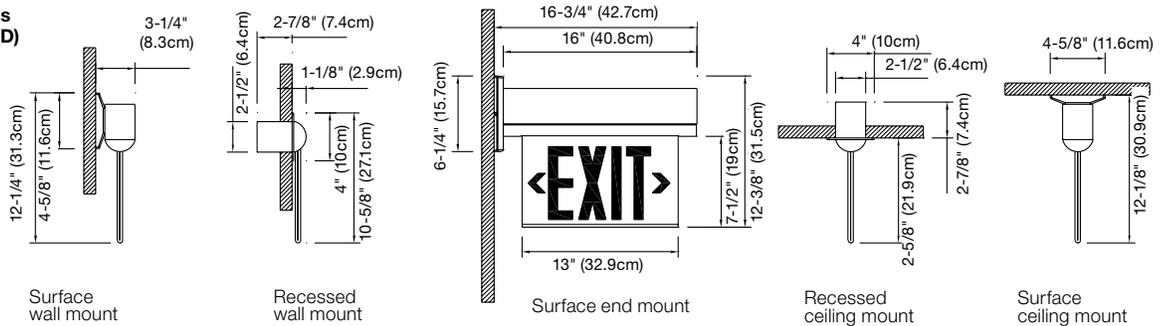


**Mounting application available with flat (Z) trim plate - recessed ceiling mount only**

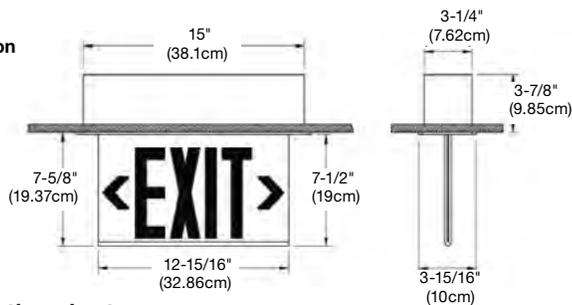

**When using (D) Dome Trim or (P) pyramid models:**

For Recessed mount, use these components

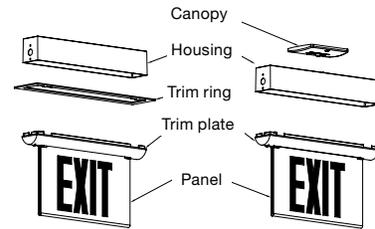

**Power consumption chart**

Model	AC Specs	DC Specs
AC-Only	120-277VAC, 60Hz (Less than 1.4W)	-
AC/DC	120-277VAC, 60Hz (Less than 1.4W)	6 to 24VDC (Less than 1.4W)
Self-powered	120-277VAC, 60Hz (Less than 2.3W)	Nickel-Cadmium battery (Min. 90 minutes)
Self-powered diagnostic	120-277VAC, 60Hz (Less than 2.3W)	Nickel-Cadmium battery (Min. 90 minutes)

**Accessories** (Order as a separate item)

Product code	Description
PW-*	Pendant, white
PB-*	Pendant, black
PA-*	Pendant, gray

\* Specify pendant length (12", 24", 36", etc).

**Ordering format**

Legend	Series	Housing color	Legend color	Panel background color	Trim plate	Chevron	Charger type	Options
<b>Blank</b> = 6" EXIT legend	<b>SLEDN</b> = AC-only	<b>A</b> = Brushed aluminum	<b>R</b> = Red	<b>C</b> = Clear (single face only)	<b>D</b> = Dome <sup>2</sup>	<b>Blank</b> = No chevron (single face sign)	<b>Blank</b> = AC only	<b>Blank</b> = No option
<b>8</b> = 8" EXIT legend	<b>SPLEDN</b> = Self-powered	<b>W</b> = White	<b>G</b> = Green	<b>W</b> = White (single or double face)	<b>P</b> = Pyramid <sup>2</sup>	<b>2</b> = No chevron (double face sign)	<b>-DC</b> = AC/DC model 6 to 24VDC	<b>-FAF</b> = Fire alarm flasher (SP only)
		<b>B</b> = Black		<b>M</b> = Mirror (single or double face)	<b>Z</b> = Flat trim <sup>3</sup>	<b>L</b> = Left chevron (on a single face sign)	<b>-ID</b> = Self-test and diagnostic (SP only)	<b>-FB</b> = Flasher & buzzer (SP only)
		<b>DB</b> = Dark bronze (painted)				<b>R</b> = Right chevron (on a single face sign)	<b>-NEX</b> = Nexus <sup>®</sup> Wired <sup>1</sup>	<b>-LP</b> = Panel shipped separately
		<b>PB</b> = Polished brass				<b>RL</b> = Left & right chevron (double face sign, one chevron on each side)	<b>-NEXRF</b> = Nexus <sup>®</sup> Wireless <sup>1</sup>	<b>-X</b> = Back box shipped separate
		<b>CH</b> = Polished chrome				<b>1D</b> = Double chevron (on single face)	<b>-Y</b> = Two circuits (AC only)	
						<b>2D</b> = Double chevron (double face sign, two chevrons on each side)		
						<b>UA</b> = Single face with universal stick on chevrons (2 Qty)		
						<b>2UA</b> = Double face with universal stick on chevrons (4 Qty)		

**Example: SLEDNARWDLY**

<sup>1</sup> Consult your sales representative.

<sup>2</sup> Universal housing for Surface or Recessed mount applications

<sup>3</sup> Fully Recessed ONLY applications (not to be used for surface mount)