


Stanilite®

Spitfire® LED recessed emergency Nexus® extended duration

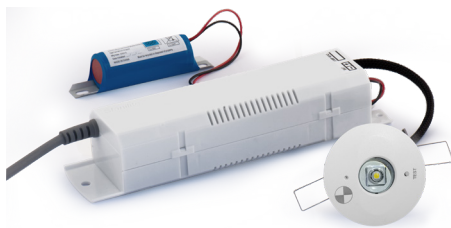

Range

Platinum range

Product group

Spitfire LED

Features



- Nexus wireless monitored, extended emergency operation to 240 minutes
- COB LED technology 100,000 hours plus lamp life
- Wide area optics with superior photometric classification
- Low power consumption and COB LED light source for reduced operation and maintenance costs
- LiFePO4 (Lithium iron phosphate) battery combined with advanced battery charging technology for longer life
- Spring fixing design allows for different ceiling thickness (1mm-20mm)
- White adaptors included to convert standard 60mm lamp head to 85mm diameter and 141mm diameter size
- White square adaptor available for standard lamp head
- Metal trim covers available for standard round and square lamp head adaptor, refer page 2 for options


Catalogue no.	Description
SFNRF2LEDP240	Spitfire recessed Nexus RF LED non-maintained, extended emergency operation to 240 minutes

Accessories

O2-SF1LSSTRIM	60mm lamp head round trim stainless steel
O2-SF1LSQSSTRIM	60mm lamp head square adaptor trim stainless steel
O2-SF1LSQBLTRIM	60mm lamp head square adaptor trim black
O2-SFLEDSQADAPT	White plastic square adaptor for LED Spitfire
SFLEDVRWR-KIT	Vandal resistant and weather resistant kit to suit to 60mm recessed head

Spare parts

O3-01338	Battery pack 3wr LiFePO4 3.2V 9.6Ah
----------	-------------------------------------

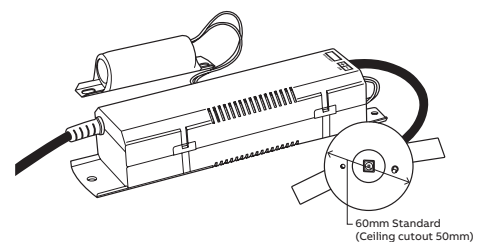

Dimensions

Lamp head	Ceiling cutout
60mm standard	50mm
85mm adaptor	70mm
141mm adaptor	130mm

Weight

Model	Weight
Nexus RF	1.2kg

Construction

Part	Construction
Lamp head	White polycarbonate

Light source		
Model	Light source	
Nexus RF	3W	

Power consumption		
Model	Power consumption	
Nexus RF	1.0W	













Note: Preliminary results

Photometrics			
Model	Class	Classification	
Nexus RF	C0	D63	
D63 COB LED	C90	D63	

Note:

- Designed to comply with AS2293 and meet relevant Australian EMC standards

Spitfire LED lamp head options

Supplied standard in White 02-SFLHWAOLED			Black lamp head with 2 adaptors 02-SFLHWAOLED-BLK			
						
60mm lamp head	85mm adaptor	141mm adaptor	60mm lamp head	85mm adaptor	141mm adaptor	
Round trims			Square trims			
						
60mm lamp head	Round trim stainless steel 02-SF1LSSTRIM		60mm lamp head	White square adaptor 02-SFLEDSQ-ADAPT	Square trim black 02-SF1LSQBL-TRIM	Square trim stainless steel 02-SF1LSQSSTRIM

Note:

- All trims clip over the face of the 60mm lamp head and all adaptors fit behind the 60mm lamp head