


BR-AG

BR Cylindrical-type Lithium Battery

Features & Benefits

- Long-term operating performance
- Suitable for Power supplies for products such as that demand long-term reliability



Applications

Commercial equipment (communication/measurement devices), meters (gas, water, electricity, hot water), memory backup (large FA equipment), automotive electronic components (security alarms), etc.

Nominal voltage		3V
Nominal capacity		1,800mAh
Continuous drain		2.5mA
Dimensions*1	Diameter(Max.)	17.0mm
	Height(Max.)	45.5mm
Weight*1		Approx. 18.0g
Operating temperature		-40°C ~ +85°C


*1 Without tabs.

Terminal types


Please see the documents for the terminal and lead wire settings.

- [Line up of tab terminal types\(by shape\)](#)
- [Line up of tab terminal types\(by product number\)](#)

Discharge temperature characteristics

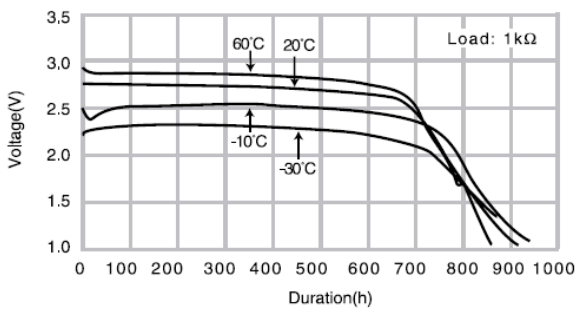

Operating voltage vs. Discharge current (voltage at 50% discharge depth)

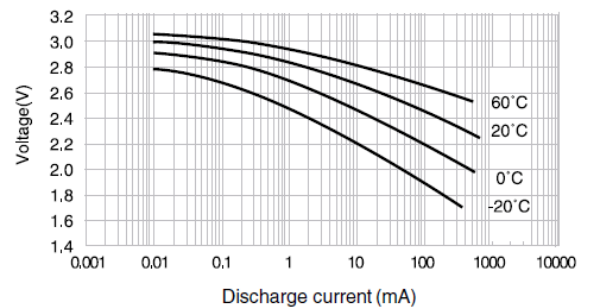

Panasonic Energy Co., Ltd.

For more information on how Panasonic can assist you with your battery power solution needs call 877-726-2228, visit www.na.industrial.panasonic.com/products/batteries or e-mail oembatteries@us.panasonic.com.

As of April, 2022. Panasonic offers batteries with tabs or lead wires. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.

