


# Vacuum generators VN

**FESTO**

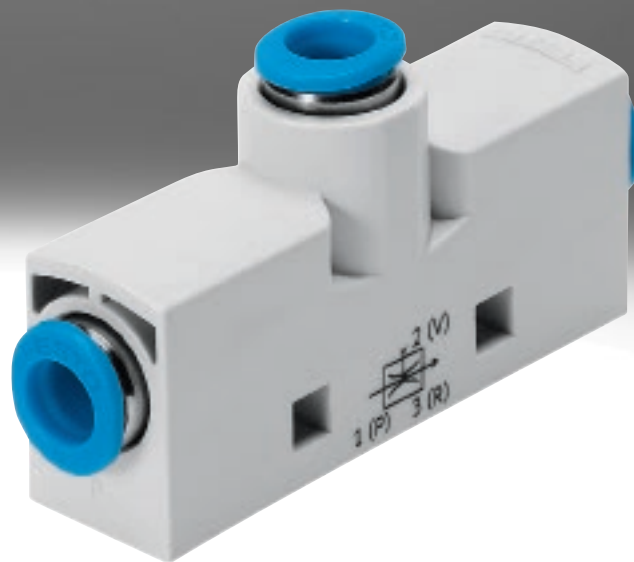

Festo Core Range  
Solves the majority of your automation tasks

Worldwide:  
Simply good:  
Fast:

Quickest delivery – wherever, whenever  
Expected high Festo quality  
Easy and fast to select


With the Festo Core Range, we have selected the most important products and functions from our broad product catalogue, and added the quickest delivery.

The Core Range offers you the best value for your automation tasks.

Just look  
for the  
star!

## Key features

### Product overview



All vacuum generators from Festo have a single-stage design and operate according to the Venturi principle. The product series described below have been designed for a wide range of

applications. The different performance classes of the individual product series make it possible to select vacuum generators that are optimally

tailored to the specific requirements of each application.

### Standard and inline ejectors

VN-... → Page 14



- Nominal width 0.45 ... 3 mm
- Max. vacuum 93%
- Temperature range 0 ... +60°C
- A range of extremely effective generators suitable for use directly in the working area
- Available in straight or T-shaped design
- Small footprint
- Cost effective
- No wearing parts
- Extremely fast evacuation time
- Optional vacuum switch
- Optional additional functions:
  - Integrated ejector pulse
  - Electrical control for vacuum ON/OFF
  - Combination of ejector pulse and actuation

VAD-.../VAK-... Datasheets → Internet: vad



- Nominal width 0.5 ... 1.5 mm
- Max. vacuum 80%
- Temperature range -20 ... +80°C
- Range of vacuum generators with sturdy aluminium housing
- VAK-...: integrated volume, VAD-...: connection for external volume
- Maintenance-free
- VAK-...: reliable setting down of workpieces

## Key features

## Compact ejectors

VADM-.../VADMI-...

Datasheets → Internet: vadm



- Nominal width  
0.45 ... 3 mm
- Max. vacuum  
84%
- Temperature range  
0 ... +60°C
- Compact design
- Minimal installation effort
- Short switching times
- Built-in solenoid valve  
(on/off)
- VADMI-...: additional integrated solenoid valve for ejector pulse
- Filter with display
- Optional air-saving function
- Optional vacuum switch
- Reliable setting down of workpieces

VAD-M-.../VAD-M-I-...

Datasheets → Internet: vad-m



- Nominal width  
0.7 ... 2 mm
- Max. vacuum  
85%
- Temperature range  
0 ... +40°C
- Compact design
- Minimal installation effort
- Short switching times
- Built-in solenoid valve  
(on/off)
- VAD-M-I-...: additional integrated solenoid valve for ejector pulse
- Reliable setting down of workpieces

## Key features

### At a glance

- Vacuum generators for high vacuum up to 93%
- Laval nozzles in six nominal widths:
  - 0.45 mm
  - 0.70 mm
  - 0.95 mm
  - 1.4 mm
  - 2.0 mm
  - 3.0 mm
- Vacuum generators for high suction rates and thus particularly short evacuation times
- Small footprint
- Compact and sturdy design
- Wear- and maintenance-free
- Modular principle: large selection of different types
- Can be used directly in the work space, making them very effective
- Plastic housing
- Flexible connection options:
  - Push-in connector QS
  - Screw-in thread
  - Push-in sleeve
  - Screw-in silencer
- Easy to mount thanks to the double-sided latching function of the mounting plate
- With or without integrated vacuum switch for monitoring the vacuum with PNP output

### Two housing types


#### T-shape

#### Connection options:

- Push-in connectors QS
- Female thread
- Male thread
- Silencer

#### Mounting options:

- Direct mounting using screws
- Indirect mounting by snapping it onto a mounting plate. This plate is suitable for H-rail 35x7.5 to DIN EN 50022.




#### Straight shape

#### Connection options:

- Push-in connectors QS
- Push-in sleeve

#### Mounting options:

Particularly compact housing with compressed air and vacuum connection in one line and unducted exhaust air. This means this design can be installed directly in the tubing line.




### Two operating principles

#### Standard

- T-shaped housing

#### Design:

Compressed air and vacuum connection offset by 90°. The extracted volumetric flow rate is deflected by 90° from front to back.




#### Inline

- T-shaped housing
- Straight housing without exhaust port for space-saving installation in a tubing line or directly in the suction cup holder

#### Design:

Compressed air and vacuum connection arranged in one line.




## Key features

### Two versions

High vacuum  
up to 93%


Vacuum  $p_u$  as a function of operating pressure  $p_1$

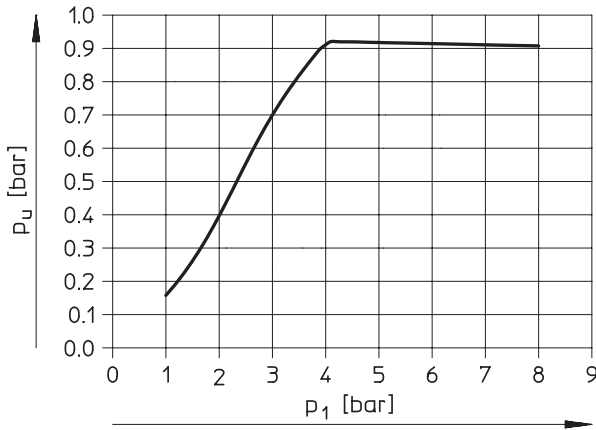

High suction rate

up to 339 l/min, enabling particularly short evacuation times.

Suction rate  $q_{ns}$  as a function of operating pressure  $p_1$

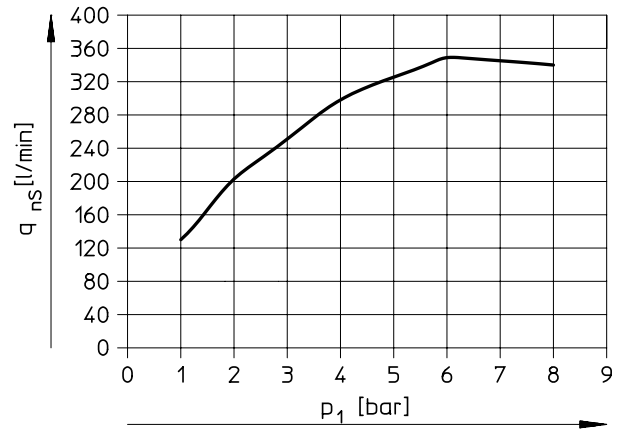


### System comparison

High vacuum – high suction rate

Generators of the first type are optimised for generating a high vacuum at comparatively low suction rates.

In contrast, the second type of generator can achieve very short evacuation times because of the high suction rate at relatively low vacuum.

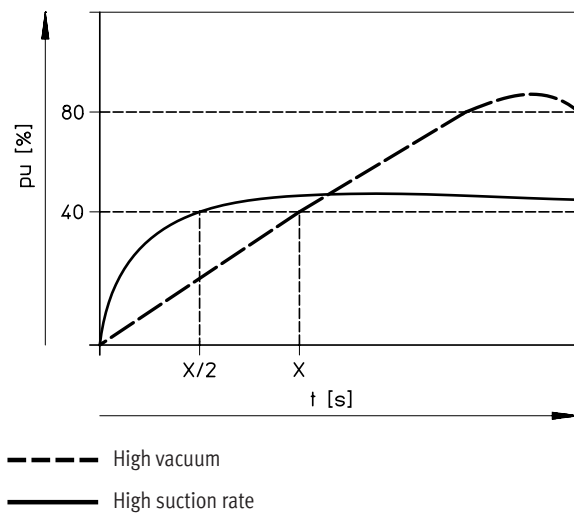









### Custom material properties

[F1A] Recommended for production facilities for manufacturing lithium-ion batteries

Metals with copper, zinc or nickel as the main constituent are excluded from use.

Exceptions are nickel in steel, chemically nickel-plated surfaces, printed circuit boards, cables, electrical plug connectors and coils.









Product range overview

Function	Version	Type	Nominal width of Laval nozzle [mm]	Grid dimension									Pneumatic connection 1	
				T-shape					Straight shape				Push-in fitting PQ	Female thread PI
				10 [mm]	14 [mm]	16 [mm]	18 [mm]	24 [mm]	10 [mm]	13 [mm]	14.5 [mm]			
High vacuum	<b>Standard H</b>													
		VN-05-H	0.45	■	-	-	-	-	-	-	-	-	■	■
		VN-07-H	0.7	■	-	-	-	-	-	-	-	-	■	■
		VN-10-H	0.95	-	■	-	■	-	-	-	-	-	■	■
		VN-14-H	1.4	-	-	-	■	-	-	-	-	-	■	■
		VN-20-H	2.0	-	-	-	-	■	-	-	-	-	■	■
		VN-30-H	3.0	-	-	-	-	■	-	-	-	-	■	■
	<b>Standard H with integrated vacuum switch</b>													
		VN-05-H-...-P	0.45	-	-	■	-	-	-	-	-	-	■	-
		VN-07-H-...-P	0.7	-	-	■	-	-	-	-	-	-	■	-
		VN-10-H-...-P	0.95	-	-	■	-	-	-	-	-	-	■	-
	<b>Standard H with pneumatic ejector pulse</b>													
		VN-05-H-...-A	0.45	-	■	-	-	-	-	-	-	-	■	■
		VN-07-H-...-A	0.7	-	■	-	-	-	-	-	-	-	■	■
		VN-10-H-...-A	0.95	-	-	-	■	-	-	-	-	-	■	■
		VN-14-H-...-A	1.4	-	-	-	■	-	-	-	-	-	■	■
	<b>Standard H with electric on/off valve</b>													
		VN-05-H-...-M	0.45	-	■	-	-	-	-	-	-	-	■	-
		VN-07-H-...-M	0.7	-	■	-	-	-	-	-	-	-	■	-
		VN-10-H-...-M	0.95	-	-	-	■	-	-	-	-	-	■	-
		VN-14-H-...-M	1.4	-	-	-	■	-	-	-	-	-	■	-
		VN-20-H-...-M	2.0	-	-	-	-	■	-	-	-	-	■	-
		VN-30-H-...-M	3.0	-	-	-	-	■	-	-	-	-	■	-
	<b>Standard H with electric on/off valve and pneumatic ejector pulse</b>													
	VN-05-H-...-B	0.45	-	■	-	-	-	-	-	-	-	■	-	
	VN-07-H-...-B	0.7	-	■	-	-	-	-	-	-	-	■	-	
	VN-10-H-...-B	0.95	-	-	-	■	-	-	-	-	-	■	-	
	VN-14-H-...-B	1.4	-	-	-	■	-	-	-	-	-	■	-	
<b>Inline M</b>														
	VN-05-M	0.45	■	-	-	-	-	-	-	-	-	■	■	
			-	■	-	-	-	-	-	-	-	■	-	
	VN-07-M	0.7	■	-	-	-	-	-	-	-	-	■	■	
			-	■	-	-	-	-	-	-	-	■	-	
VN-10-M	0.95	-	-	-	-	-	-	-	-	■	■	-		
<b>Inline M with ejector pulse, pneumatic</b>														
	VN-05-M-...-A	0.45	-	-	-	-	-	-	-	-	■	■	-	
	VN-07-M-...-A	0.7	-	-	-	-	-	-	-	-	■	■	-	

## Product range overview

Type	Vacuum connection				Pneumatic connection 3			Switching function		→ Page/ Internet
	Push-in fitting VQ	Female thread VI	Male thread VA	Push-in sleeve VT	Push-in fitting RQ	Female thread RI	Silencer RO	Fixed hysteresis O1	Variable hysteresis O2	
<b>Standard H</b>										
VN-05-H	■	■	– ■	–	■	■	■	–	–	11
VN-07-H	■	■	– ■	–	■	■	■	–	–	
VN-10-H	■	■ –	■	–	■	■ –	■	–	–	
VN-14-H	■	■	■	–	■	■	■	–	–	
VN-20-H	■	■	■	–	–	–	■	–	–	
VN-30-H	■	■	■	–	–	–	■	–	–	
<b>Standard H with integrated vacuum switch</b>										
VN-05-H-...-P	■	–	–	–	–	–	–	■	■	27
VN-07-H-...-P		–	–	–	–	–	–	–	–	
VN-10-H-...-P		–	–	–	–	–	–	–	–	
<b>Standard H with pneumatic ejector pulse</b>										
VN-05-H-...-A	■	■	–	–	–	–	■	–	–	33
VN-07-H-...-A										
VN-10-H-...-A										
VN-14-H-...-A										
<b>Standard H with electric on/off valve</b>										
VN-05-H-...-M	■	–	–	–	–	–	■	–	–	33
VN-07-H-...-M										
VN-10-H-...-M										
VN-14-H-...-M										
VN-20-H-...-M										
VN-30-H-...-M										
<b>Standard H with electric on/off valve and pneumatic ejector pulse</b>										
VN-05-H-...-B	■	–	–	–	–	–	■	–	–	33
VN-07-H-...-B										
VN-10-H-...-B										
VN-14-H-...-B										
<b>Inline M</b>										
VN-05-M	■	■	–	–	■	■	■	–	–	11
VN-07-M	■	■	–	–	■	■	■	–	–	
	■	–	–	■	–	–	–	–	–	
VN-10-M	■	–	–	–	–	–	–	–	–	
<b>Inline M with ejector pulse, pneumatic</b>										
VN-05-M-...-A	■	–	–	–	–	–	–	–	–	33
VN-07-M-...-A										

Product range overview



Function	Version	Type	Nominal width of Laval nozzle [mm]	Grid dimension									Pneumatic connection 1	
				T-shape					Straight shape				Push-in fitting PQ	Female thread PI
				10 [mm]	14 [mm]	16 [mm]	18 [mm]	24 [mm]	10 [mm]	13 [mm]	14.5 [mm]			
High suction rate	<b>Standard L</b>													
		VN-05-L	0.45	■	-	-	-	-	-	-	-	-	■	■
		VN-07-L	0.7	-	■	-	-	-	-	-	-	-	■	■
		VN-10-L	0.95	-	■	-	■	-	-	-	-	-	■	■
		VN-14-L	1.4	-	-	-	■	-	-	-	-	-	■	■
		VN-20-L	2.0	-	-	-	-	■	-	-	-	-	■	■
		VN-30-L	3.0	-	-	-	-	■	-	-	-	-	■	■
	<b>Standard L with integrated vacuum switch</b>													
		VN-05-L...-P	0.45	-	-	■	-	-	-	-	-	-	■	-
		VN-07-L...-P	0.7	-	-	■	-	-	-	-	-	-	■	-
		VN-10-L...-P	0.95	-	-	■	-	-	-	-	-	-	■	-
	<b>Standard L with pneumatic ejector pulse</b>													
		VN-05-L...-A	0.45	-	■	-	-	-	-	-	-	-	■	■
		VN-07-L...-A	0.7	-	■	-	-	-	-	-	-	-	■	■
		VN-10-L...-A	0.95	-	-	-	■	-	-	-	-	-	■	■
		VN-14-L...-A	1.4	-	-	-	■	-	-	-	-	-	■	■
	<b>Standard L with electric on/off valve</b>													
		VN-05-L...-M	0.45	-	■	-	-	-	-	-	-	-	■	-
		VN-07-L...-M	0.7	-	■	-	-	-	-	-	-	-	■	-
		VN-10-L...-M	0.95	-	-	-	■	-	-	-	-	-	■	-
		VN-14-L...-M	1.4	-	-	-	■	-	-	-	-	-	■	-
	<b>Standard L with electric on/off valve and pneumatic ejector pulse</b>													
		VN-05-L...-B	0.45	-	■	-	-	-	-	-	-	-	■	-
		VN-07-L...-B	0.7	-	■	-	-	-	-	-	-	-	■	-
VN-10-L...-B		0.95	-	-	-	■	-	-	-	-	-	■	-	
VN-14-L...-B		1.4	-	-	-	■	-	-	-	-	-	■	-	
<b>Inline N</b>														
	VN-05-N	0.45	-	■	-	-	-	-	-	-	-	■	■	
			-	-	-	-	-	-	■	-	-	■	-	
<b>Inline N with ejector pulse, pneumatic</b>														
	VN-05-N...-A	0.45	-	-	-	-	-	-	-	■	-	■	-	
	VN-07-N...-A	0.7	-	-	-	-	-	-	-	■	-	■	-	



## Product range overview

Type	Vacuum connection				Pneumatic connection 3			Switching function		→ Page/ Internet
	Push-in fitting VQ	Female thread VI	Male thread VA	Push-in sleeve VT	Push-in fitting RQ	Female thread RI	Silencer RO	Fixed hysteresis O1	Variable hysteresis O2	
<b>Standard L</b>										
VN-05-L	■	■	– ■	–	■	■	■	–	–	11
VN-07-L	■	■	■	–	■	■	■	–	–	
VN-10-L	■	■ –	■	–	■	■ –	■	–	–	
VN-14-L	■	■	■	–	■	■	–	–	–	
VN-20-L	■	■	■	–	–	–	■	–	–	
VN-30-L	–	■	■	–	–	–	■	–	–	
<b>Standard L with integrated vacuum switch</b>										
VN-05-L...P	■	–	–	–	–	–	–	■	■	27
VN-07-L...P										
VN-10-L...P										
<b>Standard L with pneumatic ejector pulse</b>										
VN-05-L...A	■	■	–	–	–	–	■	–	–	33
VN-07-L...A										
VN-10-L...A										
VN-14-L...A										
<b>Standard L with electric on/off valve</b>										
VN-05-L...M	■	–	–	–	–	–	■	–	–	33
VN-07-L...M										
VN-10-L...M										
VN-14-L...M										
<b>Standard L with electric on/off valve and pneumatic ejector pulse</b>										
VN-05-L...B	■	–	–	–	–	–	■	–	–	33
VN-07-L...B										
VN-10-L...B										
VN-14-L...B										
<b>Inline N</b>										
VN-05-N	■	■	–	–	■	■	■	–	–	11
	■	–	–	■	–	–	–	–	–	
<b>Inline N with ejector pulse, pneumatic</b>										
VN-05-N...A	■	–	–	–	–	–	–	–	–	33
VN-07-N...A										

## Product range overview


Function	Version	Type	Nominal width of Laval nozzle [mm]	→ Page/ Internet
High vacuum	<b>Vacuum generator cartridge, standard H</b>			43
		VN-05-H	0.45	
		VN-07-H	0.7	
		VN-10-H	0.95	
		VN-14-H	1.4	
		VN-20-H	2.0	
High suction rate	<b>Vacuum generator cartridge, standard L</b>			43
		VN-05-L	0.45	
		VN-07-L	0.7	
		VN-10-L	0.95	
		VN-14-L	1.4	
		VN-20-L	2.0	

## Peripherals overview

VN-05/07/10/14  
Straight shape

T-shape

VN-20/30

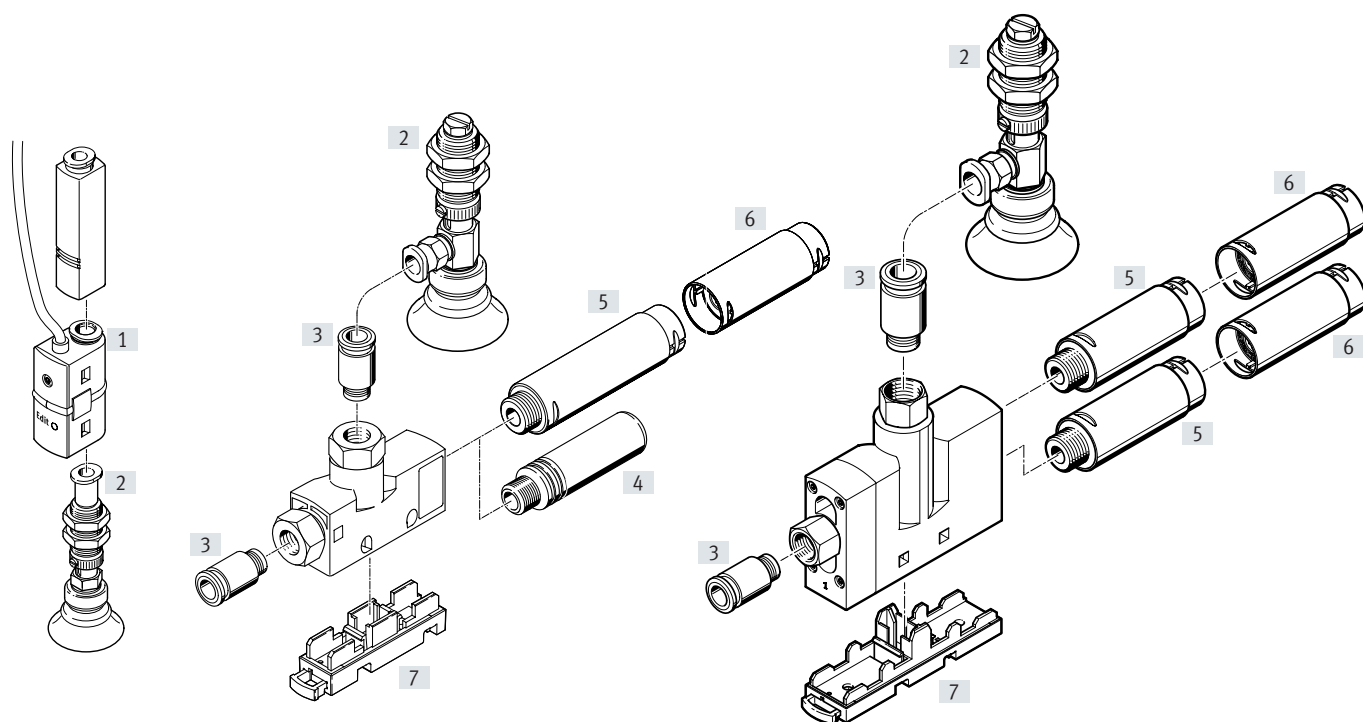

### Mounting attachments and accessories

	VN-05/07/10/14		VN-20/30			→ Page/ Internet	
	Straight shape		T-shape				
	10 mm	13 mm	10 mm	14 mm	18 mm		24 mm
[1] Pressure switch SDE5		■			■	sde5	
[2] Suction gripper ESG		■			■	esg	
[3] Push-in fitting QS		–			■	qs	
[4] Silencer UO		–	■	■	■	–	47
Silencer AMTE		–	■	■	■	–	47
[5] Silencer UOM		–	–	–	■	■	47
[6] Silencer extension UOMS		–	–	–	■	■	47
[7] Mounting plate VN-.....BP-NRH		–		■		■	46
– Suction cup holder ESH		■			■	■	esh
– Suction cup ESS		■			■	■	ess

## Type codes

### VN, pneumatic

001	Series
VN	Vacuum generator

002	Nominal width of Laval nozzle
05	0.45 mm
07	0.70 mm
10	0.95 mm
14	1.4 mm
20	2.0 mm
30	3.0 mm

003	Ejector characteristics
H	High vacuum/standard
L	High suction rate/standard
M	High vacuum/inline
N	High suction rate/inline

004	Housing type
I2	Straight shape, pitch 10 mm
I3	Straight shape, pitch 13 mm
T2	T-shape, pitch 10 mm
T3	T-shape, pitch 14 mm
T4	T-shape, pitch 18 mm
T6	T-shape, pitch 24 mm

005	Compressed air connection
PQ1	Push-in connector 4 mm
PQ2	Push-in connector 6 mm
PQ3	Push-in connector 8 mm
PQ4	Push-in connector 10 mm
PI2	Female thread M5
PI4	Female thread G1/8
PI5	Female thread G1/4

006	Vacuum connection
VQ1	Push-in fitting QS-4
VQ2	Push-in fitting QS-6
VQ3	Push-in fitting QS-8
VQ5	Push-in fitting QS-12
VI2	Female thread M5
VI4	Female thread G1/8
VI5	Female thread G1/4
VI6	Female thread G3/8
VA4	Male thread G1/8
VA5	Male thread G1/4
VT1	Push-in sleeve 4 mm
VT2	Push-in sleeve 6 mm

007	Switching function
O1	Threshold value with fixed hysteresis, 2 teach-in points, N/O contact
O2	Threshold value with variable hysteresis, N/O contact

008	Electrical output
	None
P	Switching output PNP

009	Exhaust port
RQ1	Push-in fitting QS-4
RQ2	Push-in fitting QS-6
RQ3	Push-in fitting QS-8
RI2	Female thread M5
RI4	Female thread G1/8
RI5	Female thread G1/4
RO1	Silencer UO
RO2	Silencer UOM

010	Integrated function
	None
A	Ejector pulse, pneumatic

011	Special material properties
F1A	Recommended for production facilities for the manufacture of lithium-ion batteries

## Type codes

## VN, electropneumatic

001	Series
VN	Vacuum generator

002	Nominal width of Laval nozzle
05	0.45 mm
07	0.70 mm
10	0.95 mm
14	1.4 mm
20	2.0 mm
30	3.0 mm

003	Ejector characteristics
H	High vacuum/standard
L	High suction rate/standard

004	Housing type
T3	T-shape, pitch 14 mm
T4	T-shape, pitch 18 mm
T6	T-shape, pitch 24 mm

005	Compressed air connection
PQ2	Push-in connector 6 mm
PQ3	Push-in connector 8 mm
PQ4	Push-in connector 10 mm


006	Vacuum connection
VQ2	Push-in fitting QS-6
VQ3	Push-in fitting QS-8
VQ5	Push-in fitting QS-12

007	Exhaust port
R01	Silencer UO
R02	Silencer UOM


008	Integrated function
B	Electric on/off valve and pneumatic ejector pulse
M	Electric on/off valve

Datasheet

Function standard





Inline



Temperature range  
0 ... +60°C

Operating pressure  
1 ... 8 bar



General technical data – Standard

Design		T-shape									
Type		VN-05		VN-07		VN-10		VN-14	VN-20	VN-30	
Grid dimension [mm]		10	14	10	14	14	18	18	24	24	
Nominal width of Laval nozzle [mm]		0.45		0.7		0.95		1.4	2.0	3.0	
Ejector characteristic		High vacuum H									
		High suction rate L			High suction rate L						
Pneumatic connection 1	Push-in fitting	QS-4	QS-6	QS-4	QS-6	QS-6	QS-6	QS-6	QS-10	QS-10	
	Female thread	M5	G1/8	M5	G1/8	G1/8	–	G1/8	G1/4	G1/4	
Vacuum connection	Push-in fitting	QS-4	QS-6	QS-4	QS-6	QS-6	QS-8	QS-8	QS-12	QS-12	
	Male thread	–	G1/8	–	G1/8	G1/8	G1/4	G1/4	G1/4	G1/4	
	Female thread	M5	G1/8	M5	G1/8	G1/8	–	G1/4	G3/8	G3/8	
Pneumatic connection 3	Push-in fitting	QS-4	QS-6	QS-4	QS-6	QS-6	QS-8	QS-8	–	–	
	Female thread	M5	G1/8	M5	G1/8	G1/8	–	G1/4	–	–	
	Silencer	Open	Open	Open	Open	Open	Open	Open	Open	Open	
Type of mounting (max. tightening torque)		With through-hole (0.5 Nm)							With through-hole (0.8 Nm)		
		With accessories									
Mounting position		Any									

General technical data – Inline

Design		T-shape				Straight shape				
Type		VN-05		VN-07		VN-05		VN-07		VN-10
Grid dimension [mm]		10	14	10	14	10	13	10	13	13
Nominal width of Laval nozzle [mm]		0.45		0.7		0.45		0.7		0.95
Ejector characteristic		High vacuum M								
		–	High suction rate N	–	–	High suction rate N	–	–	–	–
Pneumatic connection 1	Push-in fitting	QS-4	QS-6	QS-4	QS-6	QS-4	QS-6	QS-4	QS-6	QS-6
	Female thread	M5	G1/8	M5	G1/8	–	–	–	–	–
Vacuum connection	Push-in fitting	QS-4	QS-6	QS-4	QS-6	QS-4	QS-6	QS-4	QS-6	QS-6
	Female thread	M5	G1/8	M5	G1/8	–	–	–	–	–
	Push-in sleeve	–	–	–	–	QS-4	QS-6	QS-4	QS-6	–
Pneumatic connection 3	Push-in fitting	QS-4	QS-6	QS-4	QS-6	Not ducted				
	Female thread	M5	G1/8	M5	G1/8					
	Silencer	Open	Open	Open	Open					
Type of mounting (max. tightening torque)		With through-hole (0.5 Nm)				In-line installation				
		With accessories								
Mounting position		Any								

Note: This product conforms to ISO 1179-1 and ISO 228-1.

## Datasheet

Operating and environmental conditions		
Operating pressure [bar]	1 ... 8	
Nominal operating pressure [bar]	6	
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation not possible	
Ambient temperature [°C]	0 ... +60	
Temperature of medium [°C]	0 ... +60	
Corrosion resistance class CRC <sup>1)</sup>	1 (with push-in fitting)	
	2 (without push-in fitting, with the exception of VN-...T3-...-RO1 → CRC <sup>1)</sup> )	

1) More information: [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

Performance data – High vacuum										
Ejector characteristic		Standard H						Inline M		
Nominal width of Laval nozzle [mm]		0.45	0.7	0.95	1.4	2.0	3.0	0.45	0.7	0.95
Max. vacuum [%]		88	88	89	88	92	93	86	86	86
Operating pressure for max. vacuum [bar]		4.5	4.7	4.5	5.0	3.5	3.7	6.0	5.8	5.8
Max. suction rate with respect to atmosphere [l/min]		6.2	16	25	51.6	98	186	6.1	13.5	28
Operating pressure for max. suction rate [bar]		2.1	2.1	3.1	5.1	2.0	3.0	6.3	7.0	5.0
Pressurisation time at nominal operating pressure 6 bar (for 1 l volume) <sup>1)</sup> [s]		4.8	1.9	1.1	0.5	0.2	0.1	4.7	2.1	0.96
Noise level at nominal operating pressure 6 bar [dB (A)]		53	64	74 (RO1) 71 (RO2)	69	63	78	53	59	–

1) Time required to reduce the vacuum to a residual vacuum of –0.05 bar after switching off the operating pressure.


Performance data – High suction rate										
Ejector characteristic		Standard L						Inline N		
Nominal width of Laval nozzle [mm]		0.45	0.7	0.95	1.4	2.0	3.0	0.45		
Max. suction rate with respect to atmosphere [l/min]		15.7	38.8	62.7	90.0	188.0	339.0	12.0		
Operating pressure for max. suction rate [bar]		5.0	6.2	4.0	8.0	3.0	6.0	6.0		
Pressurisation time at nominal operating pressure 6 bar (for 1 l volume) <sup>1)</sup> [s]		1.7	0.5	0.46	0.25	0.15	0.1	1.57		
Noise level at nominal operating pressure 6 bar [dB (A)]		53	66	73 (RO1) 72 (RO2)	77	60	70	48		

1) Time required to reduce the vacuum to a residual vacuum of –0.05 bar after switching off the operating pressure.


## Datasheet

### Materials

Sectional view



Vacuum generator VN-05/07/10/14		
[1]	Housing	Reinforced POM
[2]	Silencer	RO1 PE
		RO2 Die-cast aluminium, POM, PU foam
[3]	Push-in fitting	Nickel-plated brass
[4]	Connecting thread	VA Wrought aluminium alloy
		Pl, VI, RI Anodised wrought aluminium alloy
		T3-RO1 Nickel-plated brass
-	Jet nozzle	Wrought aluminium alloy
-	Female nozzle	POM
-	Seals	NBR
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B1/B2-L
		RO2 VDMA24364 zone III

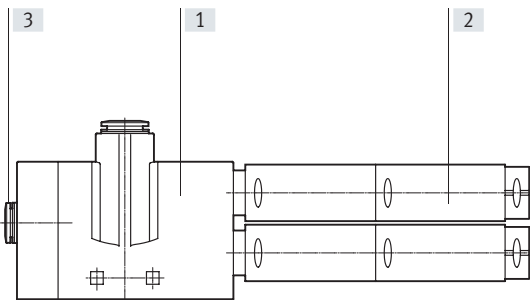

Vacuum generator VN-20/30		
[1]	Housing	Reinforced POM
[2]	Silencer	Die-cast aluminium, POM, PU foam
[3]	Push-in fitting	Nickel-plated brass
-	Connecting thread	VA Wrought aluminium alloy
		Pl, VI Anodised wrought aluminium alloy
-	Jet nozzle	Wrought aluminium alloy
-	Female nozzle	POM
-	Seals	NBR
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B1/B2-L
		RO2 VDMA24364 zone III

### Additional material specifications – products for battery production (F1A) <sup>1)</sup>

Suitable for the production of Li-ion batteries	Metals with more than 1% by mass of copper, zinc or nickel are excluded from use. Exceptions are nickel in steel, chemically nickel-plated surfaces, printed circuit boards, cables, electrical plug connectors and coils.
---	--



1) More information: [www.festo.com/catalogue/vn](http://www.festo.com/catalogue/vn) → Support/Downloads.



Datasheet

Vacuum  $p_u$  as a function of operating pressure  $p_1$

High vacuum

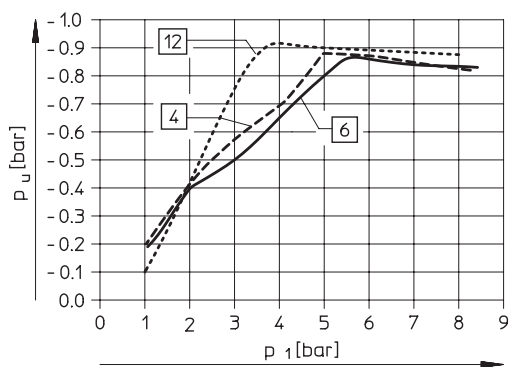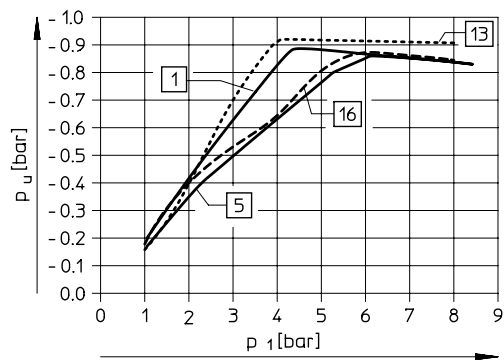



Standard:

- [1] VN-05-H...
- VN-07-H...
- VN-10-H...
- [4] VN-14-H...
- [12] VN-20-H...
- [13] VN-30-H...

Inline:

- [5] VN-05-M...
- [6] VN-07-M...
- [16] VN-10-M...

High suction rate

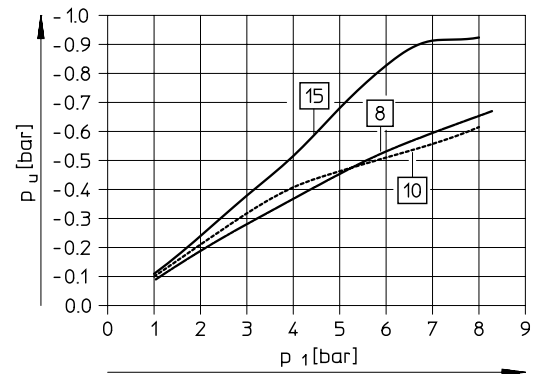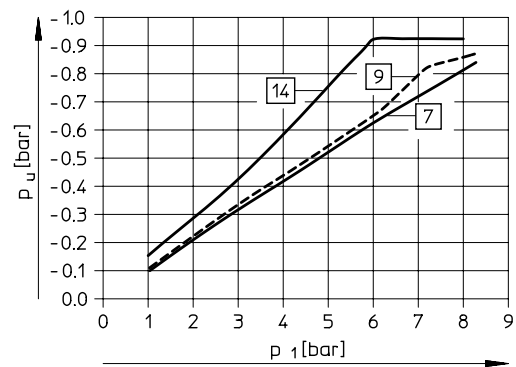

Standard:

- [7] VN-05-L...
- [8] VN-07-L...
- [9] VN-10-L...
- [10] VN-14-L...
- [14] VN-20-L...
- [15] VN-30-L...



Inline:

- [8] VN-05-N...

Datasheet

Evacuation time  $t$  as a function of vacuum  $p_u$  for 1 l volume at 6 bar operating pressure

High vacuum

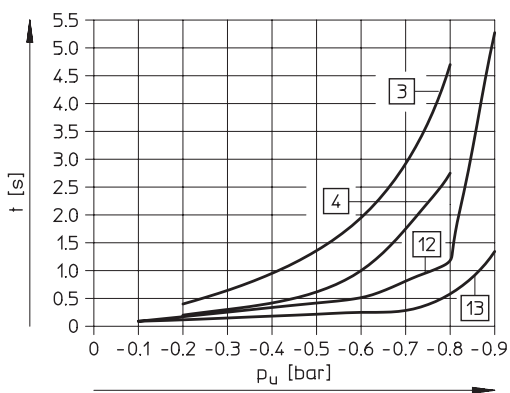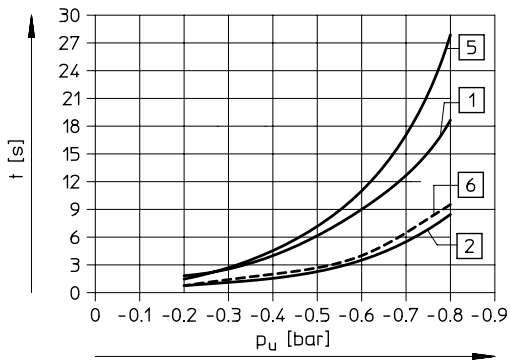




Standard:

- [1] VN-05-H...
- [2] VN-07-H...
- [3] VN-10-H...
- [4] VN-14-H...
- [12] VN-20-H...
- [13] VN-30-H...

Inline:

- [5] VN-05-M...
- [6] VN-07-M...
- [3] VN-10-M...

High suction rate

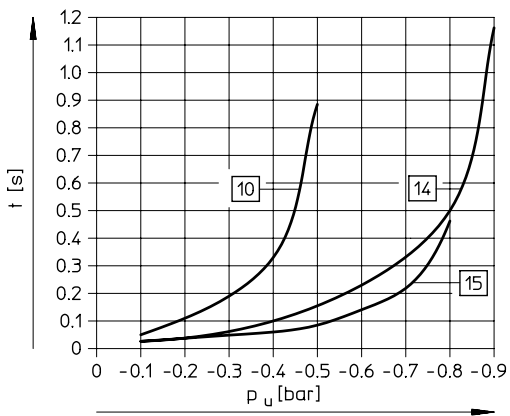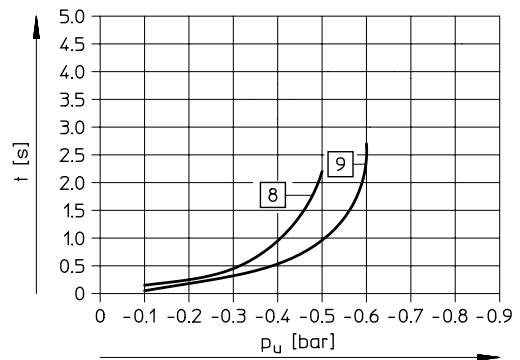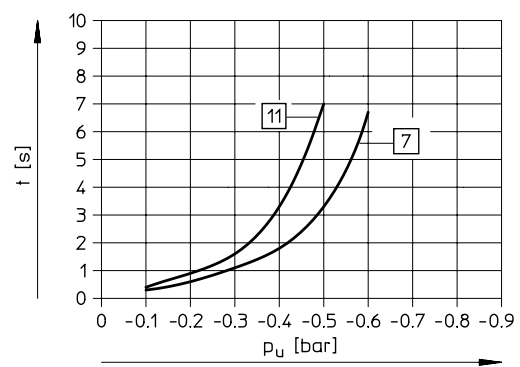

Standard:

- [7] VN-05-L...
- [8] VN-07-L...
- [9] VN-10-L...
- [10] VN-14-L...
- [14] VN-20-L...
- [15] VN-30-L...

Inline:







- [11] VN-05-N...

Datasheet

Suction rate  $q_{ns}$  (with respect to atmosphere) as a function of operating pressure  $p_1$

High vacuum

High suction rate

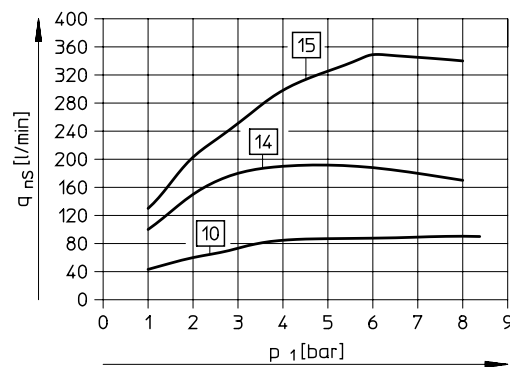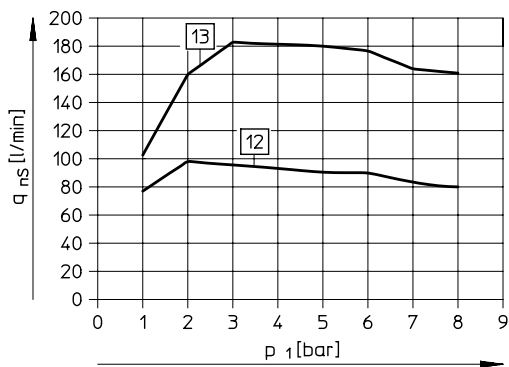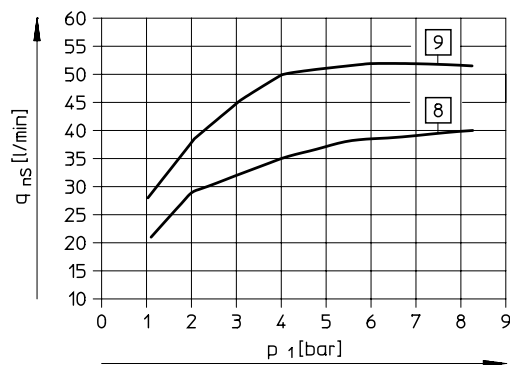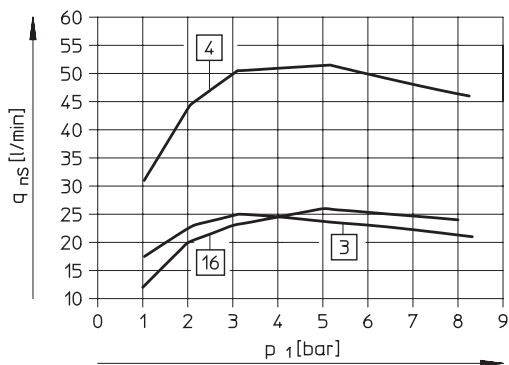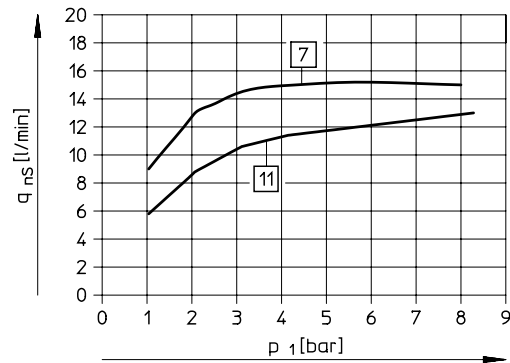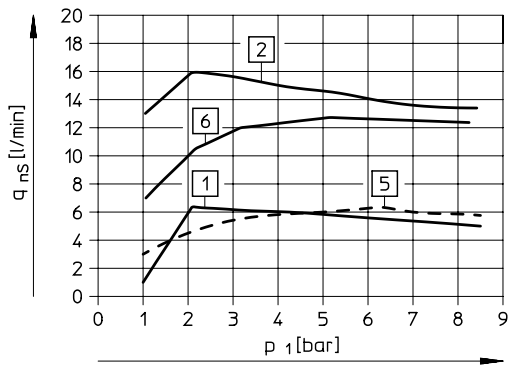

Standard:

- [1] VN-05-H-...
- [2] VN-07-H-...
- [3] VN-10-H-...
- [4] VN-14-H-...
- [12] VN-20-H-...
- [13] VN-30-H-...

Inline:

- [5] VN-05-M-...
- [6] VN-07-M-...
- [16] VN-10-M-...

Standard:

- [7] VN-05-L-...
- [8] VN-07-L-...
- [9] VN-10-L-...
- [10] VN-14-L-...
- [14] VN-20-L-...
- [15] VN-30-L-...



Inline:

- [11] VN-05-N-...

Datasheet

Air consumption  $q_n$  as a function of operating pressure  $p_1$

High vacuum/high suction rate

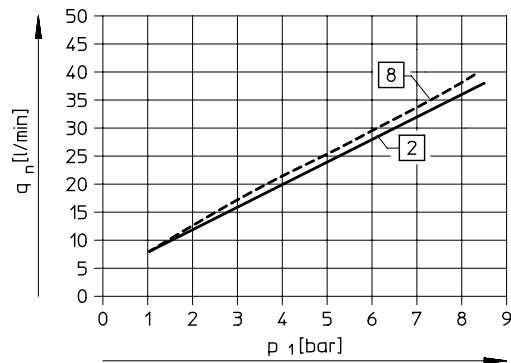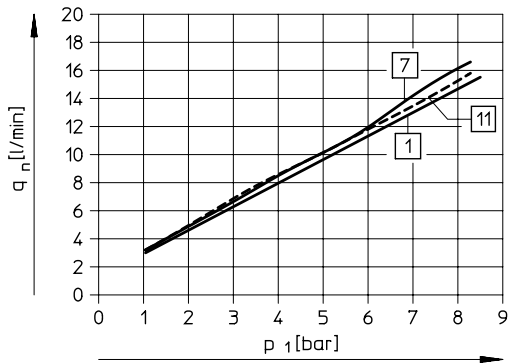

Standard:

- [1] VN-05-H...
- [7] VN-05-L...

Inline:


- [1] VN-05-M...
- [11] VN-05-N...

Standard:

- [2] VN-07-H...
- [8] VN-07-L...

Inline:

- [2] VN-07-M...

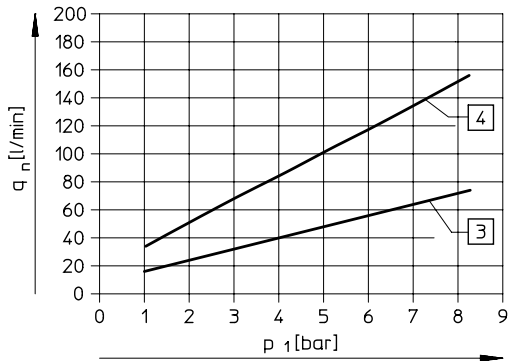


Standard:

- [3] VN-10-H...
- VN-10-L...
- [4] VN-14-H...
- VN-14-L...

Inline:

- [3] VN-10-M...

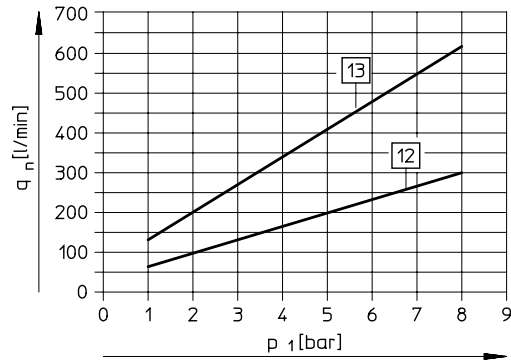

Standard:

- [12] VN-20-H...
- VN-20-L...
- [13] VN-30-H...
- VN-30-L...



Datasheet

Dimensions – T-shape/standard, VN-05/07/10/14

Download CAD data → [www.festo.com](http://www.festo.com)

VN-...T...-PQ...-VQ...-RQ...

VN-...T...-PQ...-VQ...-RO...

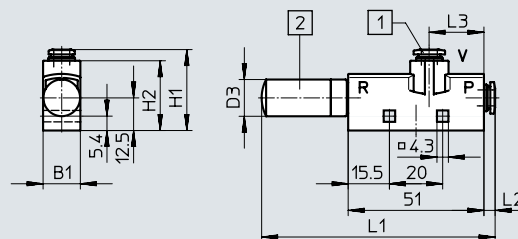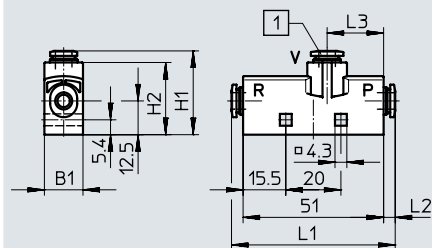



[1] Push-in fitting

[1] Push-in fitting

[2] Silencer

VN-...T...-PQ...-VA...-RQ...

VN-...T...-PQ...-VA...-RO...

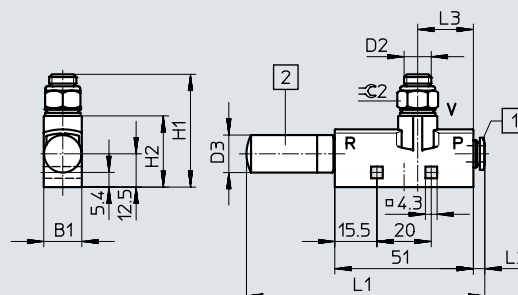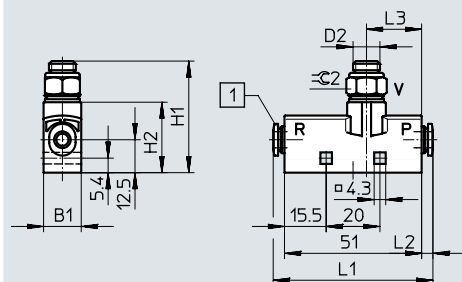



[1] Push-in fitting

[1] Push-in fitting

[2] Silencer

VN-...T...-PI...-VI...-RI...

VN-...T...-PI...-VI...-RO...

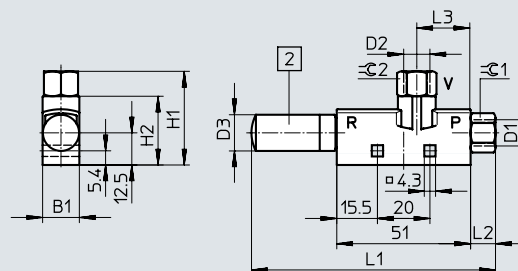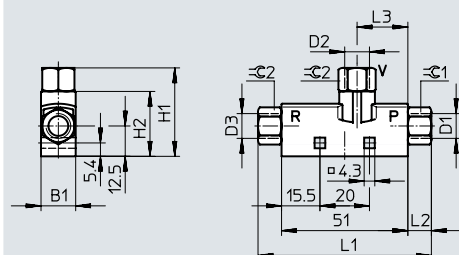

[2] Silencer

Type	B1	Connections			H1	H2	L1	L2	L3	⌀C1	⌀C2
		P D1	V D2	R D3							
VN-...T2-PQ1-VQ1-RQ1	10	QS-4	QS-4	QS-4	31.3	27.7	58.2	3.6	24.3	-	-
VN-...T2-PQ1-VQ1-RO1				9.8 <sup>1)</sup>			86.8				
VN-...T2-PI2-VI2-RI2		M5	M5	M5	32.7		61	5		9	9
VN-...T2-PI2-VI2-RO1				9.8 <sup>1)</sup>	88.2						
VN-...T3-PQ2-VQ2-RQ2	14	QS-6	QS-6	QS-6	30.4	26.2	59.4	4.2	25.5	-	-
VN-...T3-PQ2-VQ2-RO1				13.8 <sup>1)</sup>			97.6				
VN-...T3-PQ2-VA4-RQ2			G1/8	G1/8	QS-6		41.5	59.4		97.6	
VN-...T3-PQ2-VA4-RO1					13.8 <sup>1)</sup>		97.6				
VN-...T3-PI4-VI4-RI4		G1/8	G1/8	G1/8	35.7		70	9.5	13	13	
VN-...T3-PI4-VI4-RO1				13.8 <sup>1)</sup>	102.9						
VN-...T4-PQ2-VQ2-RQ3	18	QS-6	QS-8	QS-8	35.9	30.7	63.8	4.2	25.5	-	-
VN-...T4-PQ2-VQ2-RO2				17.8 <sup>1)</sup>			125.5				
VN-...T4-PQ2-VA5-RQ3			G1/4	G1/4	QS-8		50.5	63.8		125.5	
VN-...T4-PQ2-VA5-RO2					17.8 <sup>1)</sup>		125.5				
VN-...T4-PI4-VI5-RI5		G1/8	G1/4	G1/4	48.15		81.4	9.5	13	17	
VN-...T4-PI4-VI5-RO2				17.8 <sup>1)</sup>	128.8						


1) Diameter of silencer - Note: This product corresponds to ISO 1179-1 and ISO 228-1.

Datasheet


Dimensions – T-shape/standard, VN-10

Download CAD data → [www.festo.com](http://www.festo.com)

VN-10-LT3-PI4-VA4-R01

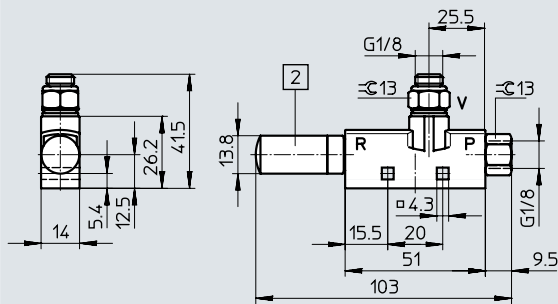

[2] Silencer




**Note:**

This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions – T-shape/standard, VN-20/30


Download CAD data → [www.festo.com](http://www.festo.com)

VN-...T6-PQ4-VQ5-R02

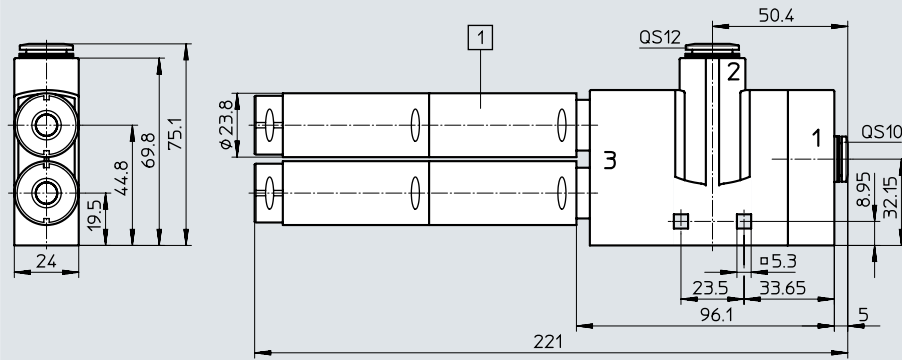


[1] Silencer

VN-...T6-PQ4-VA5-R02

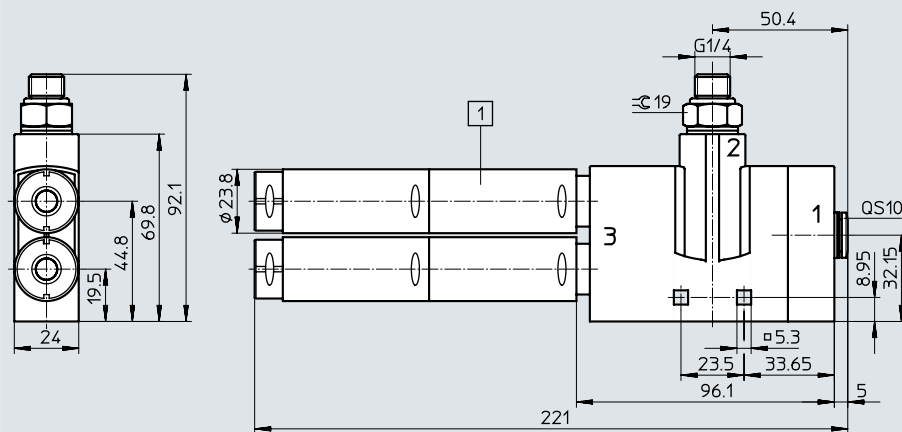


[1] Silencer




**Note:**

This product conforms to ISO 1179-1 and ISO 228-1.

VN-...T6-PI5-VI6-R02

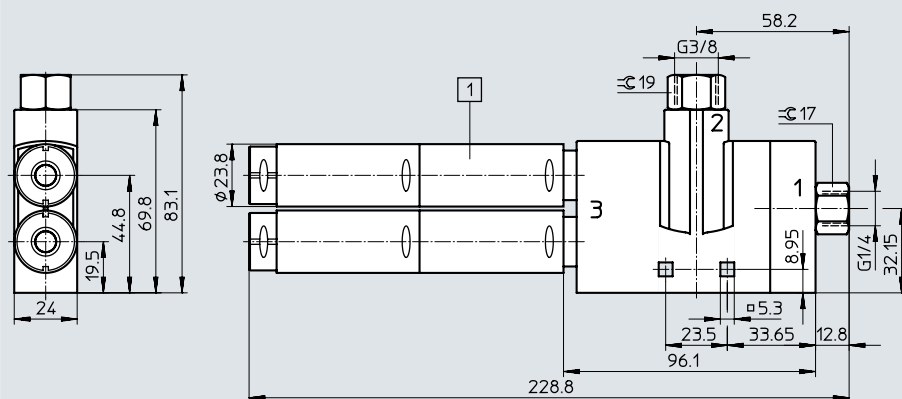

[1] Silencer



**Note:**


This product conforms to ISO 1179-1 and ISO 228-1.

Datasheet

Dimensions – T-shape/inline, VN-05/07


Download CAD data → [www.festo.com](http://www.festo.com)

VN-...T...-PQ...-VQ...-RQ...

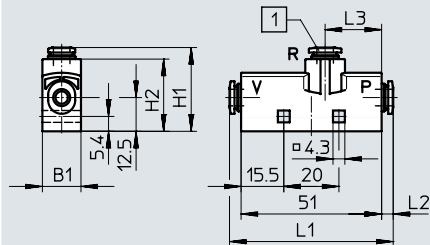

[1] Push-in fitting


VN-...T...-PQ...-VQ...-R01

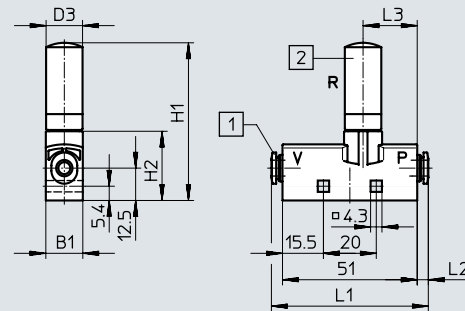


[1] Push-in fitting

[2] Silencer

VN-...T...-PI...-VI...-RI...

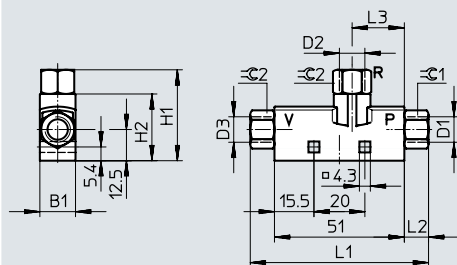

VN-...T...-PI...-VI...-R01

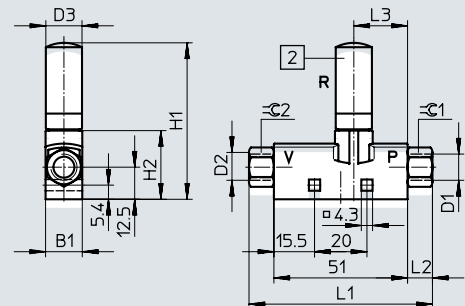

[2] Silencer

Type	B1	Connections			H1	H2	L1	L2	L3	⌀G1	⌀G2
		P D1	V D2	R D3							
VN-...T2-PQ1-VQ1-RQ1	10	QS-4	QS-4	QS-4	31.3	27.7	58.2	3.6	24.3	-	-
VN-...T2-PQ1-VQ1-R01				9.8 <sup>1)</sup>	59.9						
VN-...T2-PI2-VI2-RI2		M5	M5	M5	32.7						
VN-...T2-PI2-VI2-R01				9.8 <sup>1)</sup>	59.9						
VN-...T3-PQ2-VQ2-RQ2	14	QS-6	QS-6	QS-6	30.4	26.2	59.4	4.2	25.5	-	-
VN-...T3-PQ2-VQ2-R01				13.8 <sup>1)</sup>	68.6						
VN-...T3-PI4-VI4-RI4		G1/8	G1/8	G1/8	35.7						
VN-...T3-PI4-VI4-R01				13.8 <sup>1)</sup>	68.6						

1) Diameter of silencer

Note: This product corresponds to ISO 1179-1 and ISO 228-1.




Dimensions – Straight shape/inline, VN-05/07/10

Download CAD data → [www.festo.com](http://www.festo.com)

VN-05/07-...-I...-PQ...-VQ...

VN-10-M-I3-PQ2-VQ2

VN-05/07-...-I...-PQ...-VT...



[1] Push-in fitting

Type	B1	B2	Connections		D1 ∅	L1	L2	L3
			P	V				
VN-05/07-...-I2-PQ1-VQ1	10	-	QS-4	QS-4	-	57.4	50.2	3.6
VN-05/07-...-I2-PQ1-VT1				-	4	61.6	58	
VN-05/07-...-I3-PQ2-VQ2	13	-	QS-6	QS-6	-	58.6	50.2	4.2
VN-10-M-I3-PQ2-VQ2		22		-	66.1	57.7		
VN-05/07-...-I3-PQ2-VT2		-		-	6	60.2	56	

Datasheet

★ Core Range

Ordering data and weights – Standard

T-shape							
Grid dimension [mm]	Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum H		Weight [g]	High suction rate L	
			Part no.	Type		Part no.	Type
<b>With push-in fitting</b>							
14	0.95	22	★ 193480	VN-10-H-T3-PQ2-VQ2-RQ2	–	–	–
18	1.4	–	–	–	27	★ 193565	VN-14-L-T4-PQ2-VQ3-RQ3
<b>With female thread</b>							
14	0.95	22	★ 193500	VN-10-H-T3-PI4-VI4-RI4	–	–	–
18	1.4	36	★ 193502	VN-14-H-T4-PI4-VI5-RI5	–	–	–

Ordering data and weights – Inline

Straight shape							
Grid dimension [mm]	Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum M		Weight [g]	High suction rate N	
			Part no.	Type		Part no.	Type
<b>With push-in fitting</b>							
13	0.7	16	★ 193553	VN-07-M-I3-PQ2-VQ2	–	–	–
<b>With push-in fitting and push-in sleeve</b>							
13	0.7	12	★ 193556	VN-07-M-I3-PQ2-VT2	–	–	–

Ordering data and weights – Standard

T-shape							
Grid dimension [mm]	Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum H		Weight [g]	High suction rate L	
			Part no.	Type		Part no.	Type
<b>With push-in fitting</b>							
10	0.45	15	526100	VN-05-H-T2-PQ1-VQ1-RQ1	15	526114	VN-05-L-T2-PQ1-VQ1-RQ1
	0.7	15	526101	VN-07-H-T2-PQ1-VQ1-RQ1	–	–	–
14	0.45	22	193478	VN-05-H-T3-PQ2-VQ2-RQ2	22	193561	VN-05-L-T3-PQ2-VQ2-RQ2
	0.7	22	193479	VN-07-H-T3-PQ2-VQ2-RQ2	22	193562	VN-07-L-T3-PQ2-VQ2-RQ2
	0.95	–	–	–	22	193563	VN-10-L-T3-PQ2-VQ2-RQ2
18	0.95	27	526147	VN-10-H-T4-PQ2-VQ3-RQ3	27	526157	VN-10-L-T4-PQ2-VQ3-RQ3
	1.4	27	193482	VN-14-H-T4-PQ2-VQ3-RQ3	–	–	–
<b>With push-in fitting and silencer</b>							
10	0.45	15	193569	VN-05-H-T2-PQ1-VQ1-RO1	15	193595	VN-05-L-T2-PQ1-VQ1-RO1
	0.7	15	193570	VN-07-H-T2-PQ1-VQ1-RO1	–	–	–
14	0.45	24	193488	VN-05-H-T3-PQ2-VQ2-RO1	24	193571	VN-05-L-T3-PQ2-VQ2-RO1
	0.45	24	8187682	VN-05-H-T3-PQ2-VQ2-RO1-F1A <sup>1)</sup>	–	–	–
	0.7	24	193489	VN-07-H-T3-PQ2-VQ2-RO1	24	193572	VN-07-L-T3-PQ2-VQ2-RO1
	0.7	24	8187683	VN-07-H-T3-PQ2-VQ2-RO1-F1A <sup>1)</sup>	–	–	–
	0.95	24	193490	VN-10-H-T3-PQ2-VQ2-RO1	24	193573	VN-10-L-T3-PQ2-VQ2-RO1
	0.95	24	8187684	VN-10-H-T3-PQ2-VQ2-RO1-F1A <sup>1)</sup>	–	–	–
18	0.95	36	549251	VN-10-H-T4-PQ2-VQ3-RO2	36	549253	VN-10-L-T4-PQ2-VQ3-RO2
	1.4	36	547707	VN-14-H-T4-PQ2-VQ3-RO2	36	547710	VN-14-L-T4-PQ2-VQ3-RO2
	1.4	36	8187685	VN-14-H-T4-PQ2-VQ3-RO2-F1A <sup>1)</sup>	–	–	–
24	2.0	182	193495	VN-20-H-T6-PQ4-VQ5-RO2	182	193578	VN-20-L-T6-PQ4-VQ5-RO2
	3.0	182	193497	VN-30-H-T6-PQ4-VQ5-RO2	–	–	–

1) F1A: Products for battery production



## Datasheet

Ordering data and weights – Standard							
T-shape							
Grid dimension [mm]	Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum H		Weight [g]	High suction rate L	
			Part no.	Type		Part no.	Type
<b>With push-in fitting, vacuum port, male thread</b>							
14	0.45	24	193516	VN-05-H-T3-PQ2-VA4-RQ2	24	193599	VN-05-L-T3-PQ2-VA4-RQ2
	0.7	24	193517	VN-07-H-T3-PQ2-VA4-RQ2	24	193600	VN-07-L-T3-PQ2-VA4-RQ2
	0.95	24	193518	VN-10-H-T3-PQ2-VA4-RQ2	24	193601	VN-10-L-T3-PQ2-VA4-RQ2
18	0.95	33	526153	VN-10-H-T4-PQ2-VA5-RQ3	33	526163	VN-10-L-T4-PQ2-VA5-RQ3
	1.4	33	193520	VN-14-H-T4-PQ2-VA5-RQ3	33	193603	VN-14-L-T4-PQ2-VA5-RQ3
<b>With push-in fitting, vacuum port, male thread and silencer</b>							
14	0.45	26	193526	VN-05-H-T3-PQ2-VA4-RO1	26	193609	VN-05-L-T3-PQ2-VA4-RO1
	0.7	26	193527	VN-07-H-T3-PQ2-VA4-RO1	26	193610	VN-07-L-T3-PQ2-VA4-RO1
	0.95	26	193528	VN-10-H-T3-PQ2-VA4-RO1	26	193611	VN-10-L-T3-PQ2-VA4-RO1
18	0.95	42	549252	VN-10-H-T4-PQ2-VA5-RO2	42	549254	VN-10-L-T4-PQ2-VA5-RO2
	1.4	42	547706	VN-14-H-T4-PQ2-VA5-RO2	42	547709	VN-14-L-T4-PQ2-VA5-RO2
24	2.0	189	526145	VN-20-H-T6-PQ4-VA5-RO2	189	526135	VN-20-L-T6-PQ4-VA5-RO2
	3.0	189	526146	VN-30-H-T6-PQ4-VA5-RO2	189	526136	VN-30-L-T6-PQ4-VA5-RO2
<b>With female thread</b>							
10	0.45	13	526102	VN-05-H-T2-PI2-VI2-RI2	13	526116	VN-05-L-T2-PI2-VI2-RI2
	0.7	13	526103	VN-07-H-T2-PI2-VI2-RI2	–	–	–
14	0.45	22	193498	VN-05-H-T3-PI4-VI4-RI4	22	193581	VN-05-L-T3-PI4-VI4-RI4
	0.7	22	193499	VN-07-H-T3-PI4-VI4-RI4	22	193582	VN-07-L-T3-PI4-VI4-RI4
	0.95	–	–	–	22	193583	VN-10-L-T3-PI4-VI4-RI4
18	1.4	–	–	–	36	193585	VN-14-L-T4-PI4-VI5-RI5
<b>With female thread and silencer</b>							
10	0.45	13	526104	VN-05-H-T2-PI2-VI2-RO1	13	526118	VN-05-L-T2-PI2-VI2-RO1
	0.7	13	526105	VN-07-H-T2-PI2-VI2-RO1	–	–	–
14	0.45	24	193507	VN-05-H-T3-PI4-VI4-RO1	24	193590	VN-05-L-T3-PI4-VI4-RO1
	0.7	24	193508	VN-07-H-T3-PI4-VI4-RO1	24	193591	VN-07-L-T3-PI4-VI4-RO1
	0.95	24	193509	VN-10-H-T3-PI4-VI4-RO1	24	193592	VN-10-L-T3-PI4-VI4-RO1
18	1.4	40	547705	VN-14-H-T4-PI4-VI5-RO2	40	547708	VN-14-L-T4-PI4-VI5-RO2
24	2.0	183	526141	VN-20-H-T6-PI5-VI6-RO2	183	526131	VN-20-L-T6-PI5-VI6-RO2
	3.0	183	526142	VN-30-H-T6-PI5-VI6-RO2	183	526132	VN-30-L-T6-PI5-VI6-RO2
<b>With female thread, vacuum port, male thread and silencer</b>							
14	0.95	–	–	–	26	543315	VN-10-L-T3-PI4-VA4-RO1

Datasheet

Ordering data and weights – Inline

T-shape							
Grid dimension [mm]	Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum M		Weight [g]	High suction rate N	
			Part no.	Type		Part no.	Type

With push-in fitting							
10	0.45	15	526106	VN-05-M-T2-PQ1-VQ1-RQ1	-	-	-
	0.7	15	526107	VN-07-M-T2-PQ1-VQ1-RQ1			
14	0.45	22	193536	VN-05-M-T3-PQ2-VQ2-RQ2	22	193619	VN-05-N-T3-PQ2-VQ2-RQ2
	0.7	22	193537	VN-07-M-T3-PQ2-VQ2-RQ2	-	-	-

With push-in fitting and silencer							
10	0.45	15	526108	VN-05-M-T2-PQ1-VQ1-R01	-	-	-
	0.7	15	526109	VN-07-M-T2-PQ1-VQ1-R01			
14	0.45	24	193540	VN-05-M-T3-PQ2-VQ2-R01	24	193623	VN-05-N-T3-PQ2-VQ2-R01
	0.7	24	193541	VN-07-M-T3-PQ2-VQ2-R01	-	-	-

With female thread							
10	0.45	13	526110	VN-05-M-T2-PI2-VI2-RI2	-	-	-
	0.7	13	526111	VN-07-M-T2-PI2-VI2-RI2			
14	0.45	22	193544	VN-05-M-T3-PI4-VI4-RI4	22	193627	VN-05-N-T3-PI4-VI4-RI4
	0.7	22	193545	VN-07-M-T3-PI4-VI4-RI4	-	-	-

With female thread and silencer							
10	0.45	13	526112	VN-05-M-T2-PI2-VI2-R01	-	-	-
	0.7	13	526113	VN-07-M-T2-PI2-VI2-R01			
14	0.45	24	193548	VN-05-M-T3-PI4-VI4-R01	24	193631	VN-05-N-T3-PI4-VI4-R01
	0.7	24	193549	VN-07-M-T3-PI4-VI4-R01	-	-	-

Ordering data and weights – Inline


Straight shape							
Grid dimension [mm]	Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum M		Weight [g]	High suction rate N	
			Part no.	Type		Part no.	Type

With push-in fitting							
10	0.45	11	193580	VN-05-M-I2-PQ1-VQ1	-	-	-
	0.7	11	193586	VN-07-M-I2-PQ1-VQ1			
13	0.45	16	193552	VN-05-M-I3-PQ2-VQ2	16	193635	VN-05-N-I3-PQ2-VQ2
	0.95	23	193554	VN-10-M-I3-PQ2-VQ2	-	-	-

With push-in fitting and push-in sleeve							
10	0.45	8	193587	VN-05-M-I2-PQ1-VT1	-	-	-
	0.7	8	193588	VN-07-M-I2-PQ1-VT1			
13	0.45	12	193555	VN-05-M-I3-PQ2-VT2	12	193637	VN-05-N-I3-PQ2-VT2

## Peripherals overview


### Peripherals overview

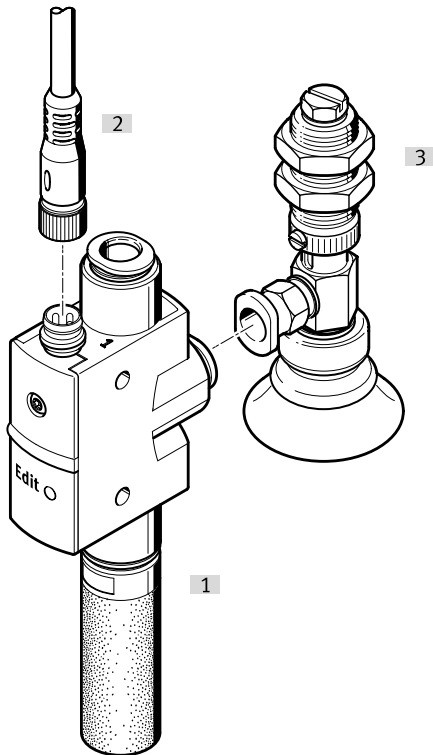



Mounting attachments and accessories		→ Page/ Internet
[1]	Vacuum generators VN-P	27
[2]	Plug socket with cable, 3-pin NEBU-M8	48
[3]	Suction gripper ESG	esg
-	Suction cup holder ESH	esh
-	Suction cup ESS	ess

## Datasheet

Function  
Standard



-  - Temperature range  
0 ... +60°C
-  - Operating pressure  
0.1 ... 0.8 MPa



- Threshold value comparator with fixed or variable hysteresis
- Teach-in setting option for threshold value and hysteresis

### General technical data

Design	T-shape		
Type	VN-05	VN-07	VN-10
Grid dimension [mm]	16	16	16
Nominal width of Laval nozzle [mm]	0.45	0.7	0.95
Ejector characteristic	High vacuum/standard H High suction rate/standard L		
Integrated function	Pressure sensor Open silencer		
Pneumatic connection 1	QS-6		
Vacuum connection	QS-6		
Pneumatic connection 3	Open silencer		
Measured variable	Relative pressure		
Measuring principle	Piezoresistive		
Pressure measuring range	[kPa]	-100 ... 0	
	[bar]	-1 ... 0	
	[psi]	-14.5 ... 0	
Type of mounting (max. tightening torque)	With through-hole (0.6 Nm)		
Mounting position	Any <sup>1)</sup>		
Cleaning recommendation	Soapy water		
Product weight [g]	33	36	36

1) It should not be possible for condensed water to collect in the sensor.

### Operating and environmental conditions

Operating pressure	[MPa]	0.1 ... 0.8
	[bar]	1 ... 8
	[psi]	14.5 ... 116
Nominal operating pressure	[MPa]	0.6
	[bar]	6
	[psi]	87
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]	
Note on the operating/pilot medium	Lubricated operation not possible	
Ambient temperature [°C]	0 ... +50	
Temperature of medium [°C]	0 ... +60	
Corrosion resistance class CRC <sup>1)</sup>	1 - Low corrosion stress	
CE marking (see declaration of conformity) <sup>2)</sup>	To EU EMC Directive	
UKCA marking (see declaration of conformity) <sup>2)</sup>	To UK EMC regulations	
Certification	RCM Mark	
KC marking	KC EMC	

1) More information: [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

2) [www.festo.com/catalogue/vn](http://www.festo.com/catalogue/vn) → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

## Datasheet

Performance data		High vacuum/standard H			High suction rate/standard L		
Ejector characteristic							
Nominal width of Laval nozzle	[mm]	0.45	0.7	0.95	0.45	0.7	0.95
Max. vacuum	[%]	92	92	93	–	–	–
Operating pressure for max. vacuum	[MPa]	0.49	0.44	0.35	–	–	–
	[bar]	4.9	4.4	3.5	–	–	–
	[psi]	71.05	63.8	50.75	–	–	–
Max. suction rate with respect to atmosphere	[l/min]	7.2	16.2	21.8	13.6	30.9	41.5
Operating pressure for max. suction rate	[MPa]	0.3	0.3	0.3	0.5	0.4	0.5
	[bar]	3	3	3	5	4	5
	[psi]	43.5	43.5	43.5	72.5	58	72.5
Noise level at nominal operating pressure 6 bar	[dB (A)]	62	66	70	54	63	66

Electrical data		
Operating voltage range	[V DC]	15 ... 30
Residual ripple	[%]	10
Electrical connection		M8x1, 3-pin
Switch-on/switch-off time	[ms]	≤ 4
Switching output		PNP
Max. output current	[mA]	100
Residual current	[mA]	≤ 0.3
Voltage drop	[V]	≤ 1.5
Switching element function		N/O
Setting options		Teach-in
Switching function		Threshold value comparator with fixed hysteresis
		Threshold value comparator with variable hysteresis
Threshold-value setting range	[kPa]	–100 ... 0
	[bar]	–1 ... 0
	[psi]	–14.5 ... 0
Accuracy	[% FS] <sup>1)</sup>	±1.5
Hysteresis	[% FS] <sup>1)</sup>	±2 (threshold value comparator with fixed hysteresis)
Long-term drift	[% FS] <sup>1)</sup>	max. ±0.5
Temperature coefficient of switching point	[%/K]	0.05
Display type/switching status indication		LED
Inductive protective circuit		Adapted to MZ, MY, ME coils
Short circuit current rating		Clocked
Reverse polarity protection		For all electrical connections
Overload protection		Available
Degree of protection		IP40 (to EN 60529)


1) % FS = % of measuring range end value (full scale)

 Electrical outputs<sup>1)</sup>


1 switching output PNP

## Pin allocations

M8x1 plug



1 = +24 V  
3 = 0 V  
4 = Output A




1) Wire colours as indicated apply when using plug sockets with cable NEBU-M8, 3-pin; datasheet → Internet: nebu-m8\*3

## Datasheet

### Materials



Sectional view

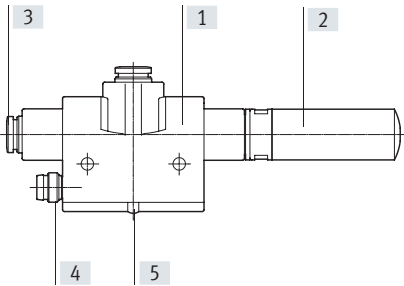

Vacuum generator		
[1]	Housing material	Reinforced POM
[2]	Silencer material	PE
[3]	Push-in fitting material	Nickel-plated brass
[4]	Plug housing material	PA, chrome- and nickel-plated brass
[5]	Fibre-optic cable material	PC
-	Jet nozzle material	Wrought aluminium alloy
-	Female nozzle material	POM
-	Keypad material	POM
-	Sealing material	NBR
LABS (PWIS) conformity		VDMA24364-B1/B2-L


### Vacuum $p_u$ as a function of operating pressure $p_1$

High vacuum/high suction rate

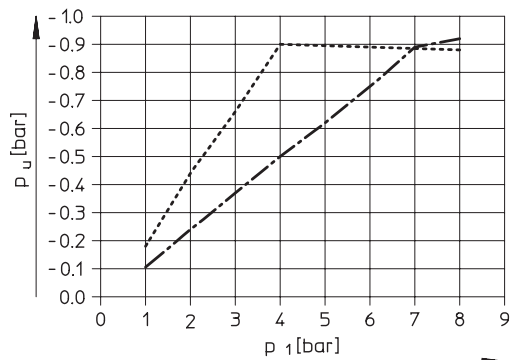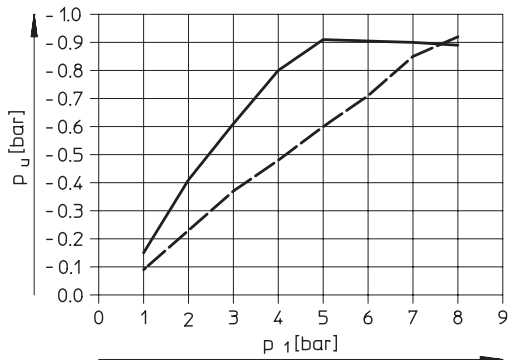

— VN-05-H  
- - - VN-05-L

..... VN-07-H  
- · - · - VN-07-L


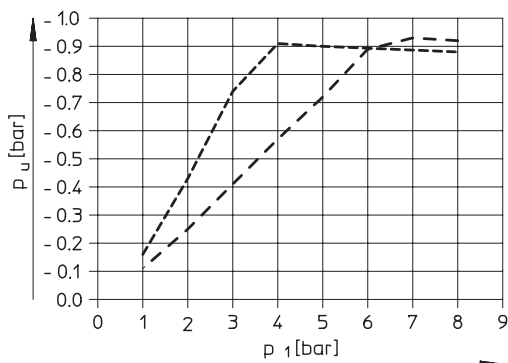


- - - VN-10-H  
- · - · - VN-10-L

## Datasheet

### Evacuation time $t$ as a function of vacuum $p_u$ for 1 l volume at 6 bar operating pressure

High vacuum/high suction rate

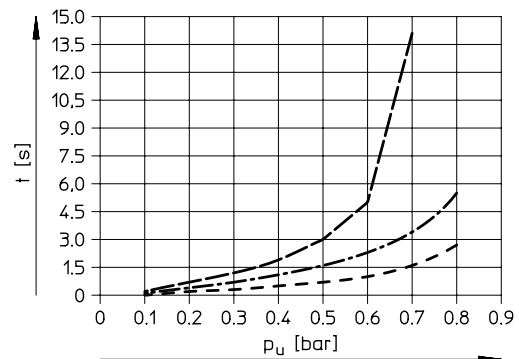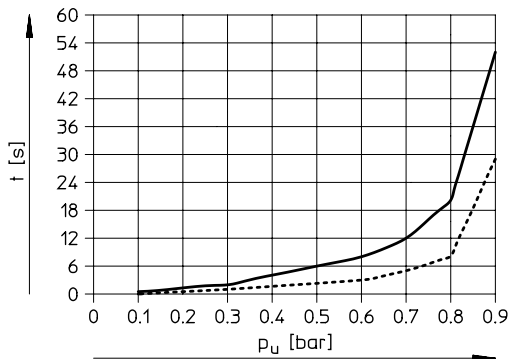



— VN-05-H  
 ..... VN-07-H

--- VN-05-L  
 -.-.- VN-07-L  
 — VN-10-H  
 -.-.- VN-10-L

$p_u$  = Negative pressure

### Suction rate $q_{ns}$ (with respect to atmosphere) as a function of operating pressure $p_1$

High vacuum/high suction rate

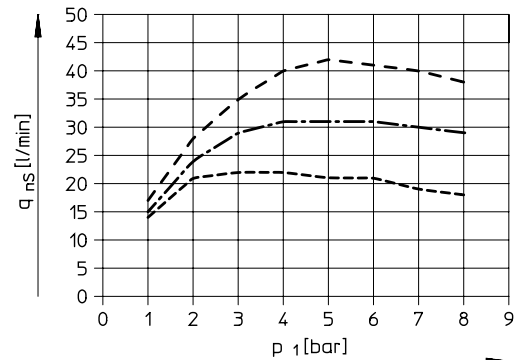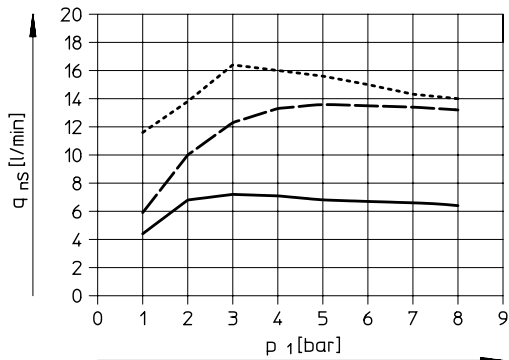


— VN-05-H  
 --- VN-05-L  
 ..... VN-07-H

-.-.- VN-07-L  
 -.-.- VN-10-H  
 --- VN-10-L

### Air consumption $q_n$ as a function of operating pressure $p_1$

High vacuum/high suction rate

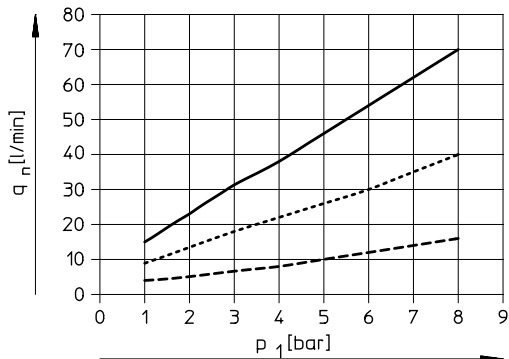


--- VN-05  
 ..... VN-07  
 — VN-10

Datasheet

Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)

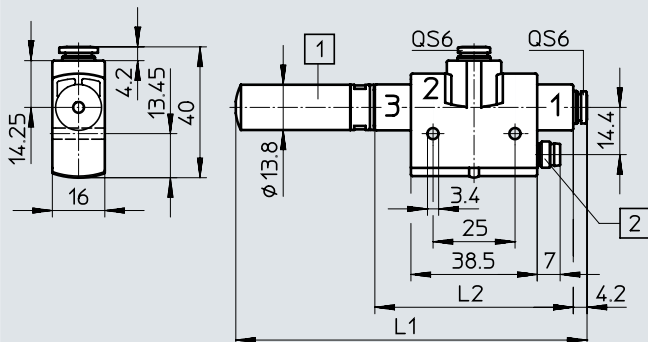

- [1] Silencer
- [2] M8x1, 3-pin

Type	L1	L2
VN-05	93.6	44.2
VN-07	107	60.5
VN-10		

Ordering data


With push-in fitting and silencer

Nominal width of Laval nozzle [mm]	Switching function		High vacuum/standard H		High suction rate/standard L	
	Threshold value with fixed hysteresis	Threshold value with variable hysteresis	Part no.	Type	Part no.	Type
0.45	■	–	536796	VN-05-H-T4-PQ2-VQ2-01-P	536798	VN-05-L-T4-PQ2-VQ2-01-P
	–	■	536797	VN-05-H-T4-PQ2-VQ2-02-P	536799	VN-05-L-T4-PQ2-VQ2-02-P
0.7	■	–	536800	VN-07-H-T4-PQ2-VQ2-01-P	536802	VN-07-L-T4-PQ2-VQ2-01-P
	–	■	536801	VN-07-H-T4-PQ2-VQ2-02-P	536803	VN-07-L-T4-PQ2-VQ2-02-P
0.95	■	–	536804	VN-10-H-T4-PQ2-VQ2-01-P	536806	VN-10-L-T4-PQ2-VQ2-01-P
	–	■	536805	VN-10-H-T4-PQ2-VQ2-02-P	536807	VN-10-L-T4-PQ2-VQ2-02-P



Peripherals overview

Straight shape VN-05/07-...-A	T-shape VN-05/07/10/14-...-A/M/B	VN-20/30-...-M
----------------------------------	-------------------------------------	----------------

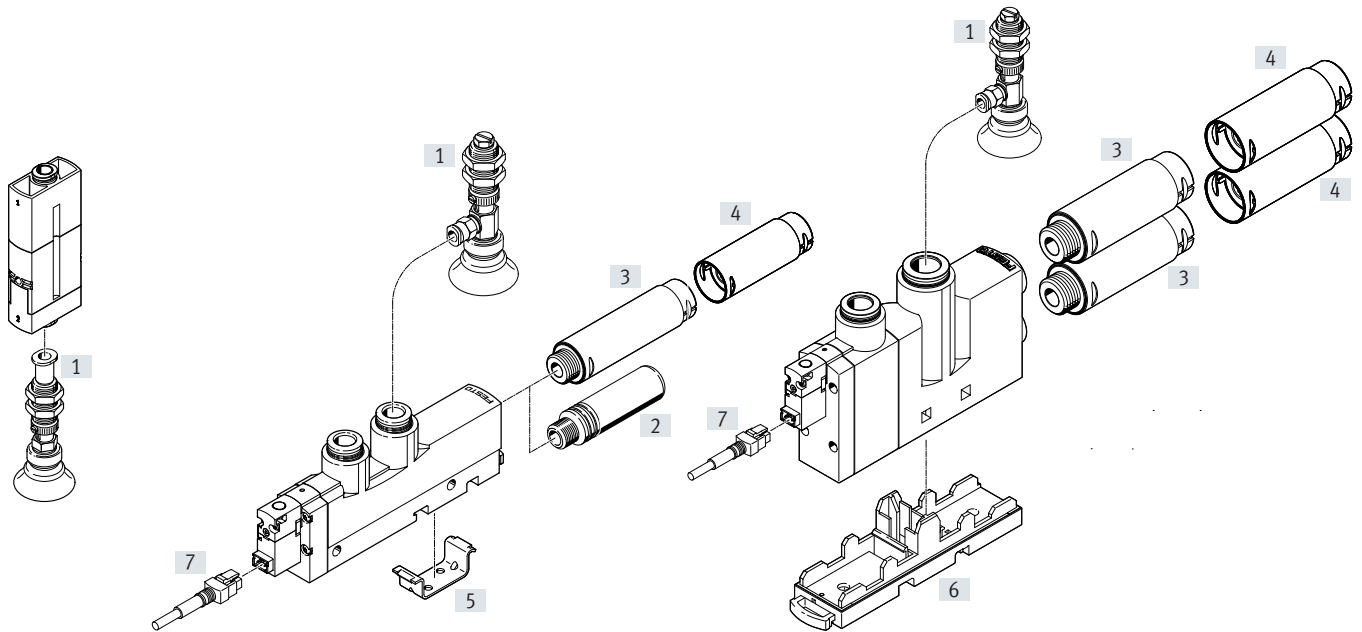


Mounting attachments and accessories		Straight shape		T-shape				→ Page/Internet				
		VN-05/07		VN-05/07/10		VN-14			VN-20/30			
		A		A	M	B	A		M	B	M	
[1]	Suction gripper ESG	■		■				■				esg
[2]	Silencer UO	-		■				-				47
[3]	Silencer UOM	-		-				■				47
[4]	Silencer extension UOMS	-		-				■				47
[5]	Mounting plate VN-T3/T4-BP	-		■				■				46
[6]	Mounting plate VN-T6-BP-NRH	-		-				-			■	46
[7]	Plug socket with cable, 2-pin NEBV	-		-	■	■		-	■	■		48
-	Suction cup holder ESH	■		■				■			■	esh
-	Suction cup ESS	■		■				■			■	ess



## Datasheet


### Function

VN-A – Standard/inline  
Ejector pulse, pneumatic




### VN-A

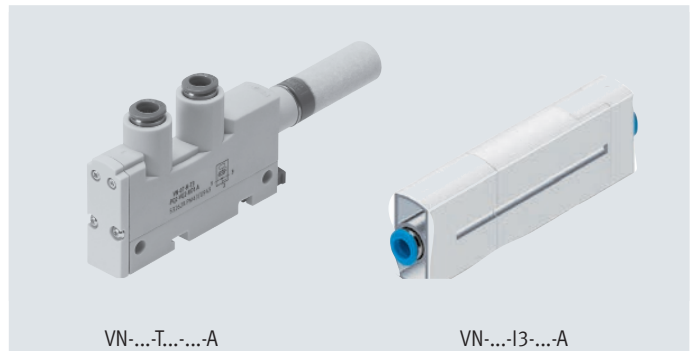

-  - Temperature range  
0 ... +60°C
-  - Operating pressure  
1 ... 8 bar




VN-M – Standard  
On/off valve, electric




### VN-M / VN-B

-  - Temperature range  
0 ... +50°C
-  - Operating pressure  
2 ... 8 bar

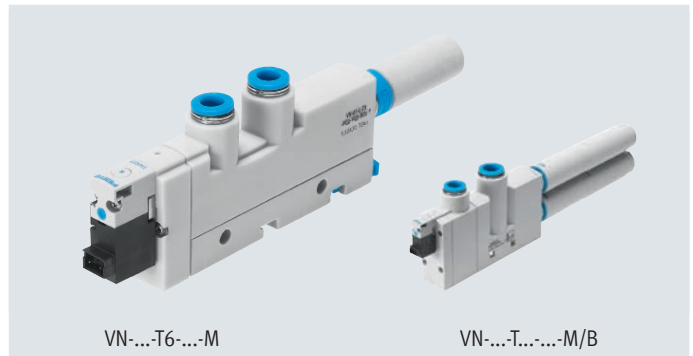

VN-B – Standard  
On/off valve, electric,  
ejector pulse, pneumatic



### General technical data – Standard

Design	T-shape															
Type	VN-05			VN-07			VN-10			VN-14			VN-20	VN-30		
Grid dimension [mm]	14			14			14			18			24	24		
Integrated function	A	M	B	A	M	B	A	M	B	A	M	B	M	M		
Nominal width of Laval nozzle [mm]	0.45			0.7			0.95			1.4			2.0	3.0		
Ejector characteristic	High vacuum/standard H												High suction rate/standard L		–	
Pneumatic connection 1	Push-in fitting	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-8	QS-8	QS-8	QS-10	QS-10
	Female thread	G1/8	–	–	G1/8	–	–	G1/8	–	–	G1/8	–	–	–	–	–
Vacuum connection	Push-in fitting	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-6	QS-8	QS-8	QS-8	QS-12	QS-12	
	Female thread	G1/8	–	–	G1/8	–	–	G1/8	–	–	G1/4	–	–	–	–	
Pneumatic connection 3	Open silencer															
Type of mounting (max. tightening torque)	With through-hole (0.5 Nm)												With through-hole (0.8 Nm)			
	With H-rail												–			
	With accessories															
Mounting position	Any															
Cleaning recommendation	Soapy water															

† Note: This product conforms to ISO 1179-1 and ISO 228-1.

## Datasheet

General technical data – Inline		
Design	Straight shape	
Type	VN-05	VN-07
Grid dimension [mm]	14.5	14.5
<b>Integrated function</b>	<b>A</b>	<b>A</b>
Nominal width of Laval nozzle [mm]	0.45	0.7
Ejector characteristic	High vacuum/inline M High suction rate/inline N	
Pneumatic connection 1	QS-6	
Vacuum connection	QS-6	
Type of mounting	In-line installation	
Mounting position	Any	
Cleaning recommendation	Soapy water	

Operating and environmental conditions				
Pneumatic connection	With push-in fitting			With female thread
<b>Integrated function</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>
Operating pressure [bar]	1 ... 8	2 ... 8		1 ... 8
Nominal operating pressure [bar]	6			
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on the operating/pilot medium	Lubricated operation not possible			
Ambient temperature [°C]	0 ... +60	0 ... +50		0 ... +60
Temperature of medium [°C]	0 ... +60	0 ... +50		0 ... +60
Corrosion resistance class CRC <sup>1)</sup>	1			2

1) More information: [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

Performance data – High vacuum																
Ejector characteristic	Standard H												Inline M			
Nominal width of Laval nozzle [mm]	0.45			0.7			0.95			1.4			2.0	3.0	0.45	0.7
<b>Integrated function</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>M</b>	<b>M</b>	<b>A</b>	<b>A</b>
Max. vacuum [%]	92			92			93			92			92	93	93	93
Operating pressure for max. vacuum [bar]	4.9			4.4			3.5			3.5			3.5	3.7	4.3	4.3
Max. suction rate with respect to atmosphere [l/min]	7.2			16.2			21.8			48.8			98	186	7.2	16.6
Operating pressure for max. suction rate [bar]	3			3			3			4			2	3	2	2
Pressurisation time at nominal operating pressure 6 bar (for 1 l volume) <sup>1)</sup> [s]	3.63	3.9		1.5	1.69		0.96	1.06		0.43	0.5		0.24	0.13	4.1	1.69
Noise level at nominal operating pressure 6 bar [dB (A)]	56			65			71			69			63	78	66	75

1) Time required to reduce the vacuum to a residual vacuum of –0.05 bar after switching off the operating pressure.

## Datasheet

### Performance data – High suction rate

Ejector characteristic	Standard L												Inline N	
Nominal width of Laval nozzle [mm]	0.45			0.7			0.95			1.4			0.45	0.7
<b>Integrated function</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>M</b>	<b>B</b>	<b>A</b>	<b>A</b>
Max. suction rate with respect to atmosphere [l/min]	13.6			30.9			40.5			92.6			13.3	32.6
Operating pressure for max. suction rate [bar]	5			4			5			5			5	4
Pressurisation time at nominal operating pressure 6 bar (for 1 l volume) <sup>1)</sup> [s]	1.93	1.97		0.79	0.83		0.62	0.67		0.28	0.32		2.24	0.89
Noise level at nominal operating pressure 6 bar [dB (A)]	52			64			72			69			68	78


1) Time required to reduce the vacuum to a residual vacuum of -0.05 bar after switching off the operating pressure.

### Technical data – On/off valve

Operating voltage range [V DC]	21.6 ... 26.4
Duty cycle [%]	100
Degree of protection	IP40 (to EN 60529)
Valve function	2/2-way valve
Manual override	Non-detenting

### Materials

Sectional view

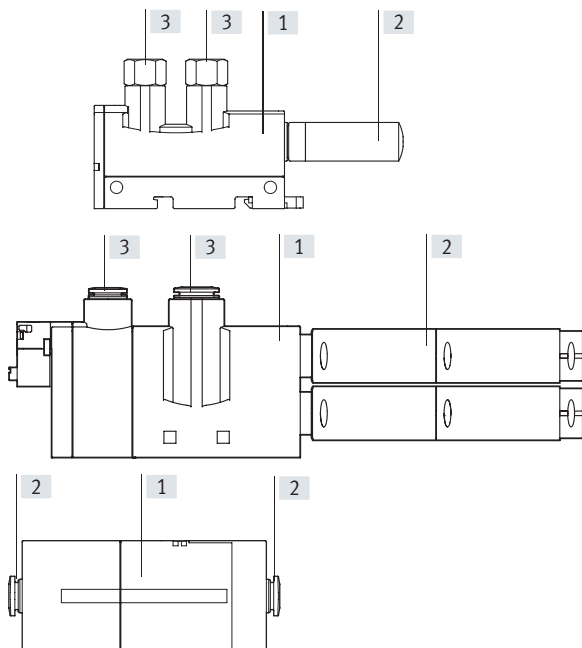

#### Vacuum generator VN – Standard

[1] Housing		Reinforced PA, reinforced POM
[2] Silencer	RO1	PE
	RO2	Wrought aluminium alloy, POM, PU foam
[3] Push-in fitting		Nickel-plated brass
- Connecting thread		Anodised wrought aluminium alloy
- Jet nozzle		Wrought aluminium alloy
- Female nozzle		POM
- Screws		Steel
- Seals		NBR
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B1/B2-L
	RO2	VDMA24364 zone III


#### Vacuum generator VN – Inline

[1] Housing		Reinforced PA, reinforced POM
[2] Push-in fitting		Nickel-plated brass
- Jet nozzle		Wrought aluminium alloy
- Female nozzle		POM
- Seals		NBR
Note on materials		RoHS-compliant
LABS (PWIS) conformity		VDMA24364-B1/B2-L

Datasheet


Vacuum  $p_u$  as a function of operating pressure  $p_1$

High vacuum – Standard

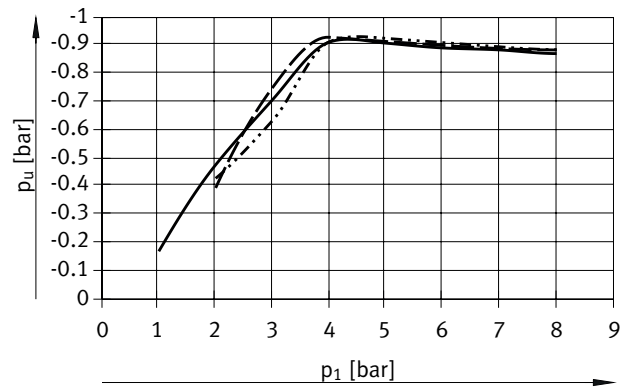


- VN-05-H
- VN-07-H
- - - VN-10-H


High suction rate – Standard

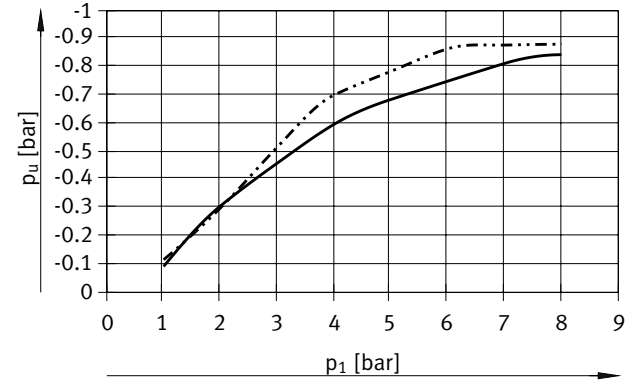

- VN-05-L
- VN-10-L

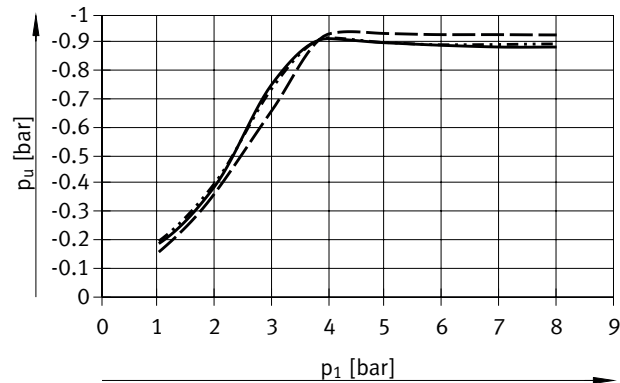


- VN-14-H
- VN-20-H
- - - VN-30-H

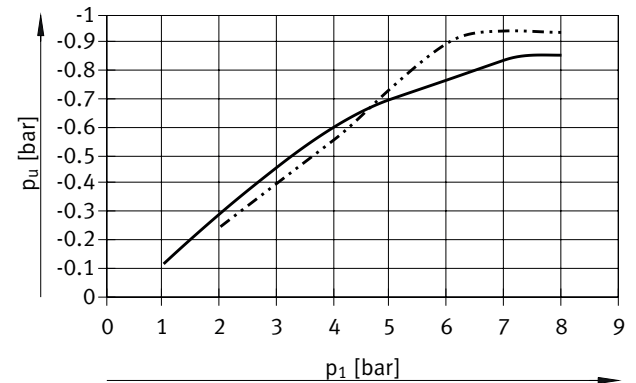


- VN-07-L
- VN-14-L

High vacuum – Inline

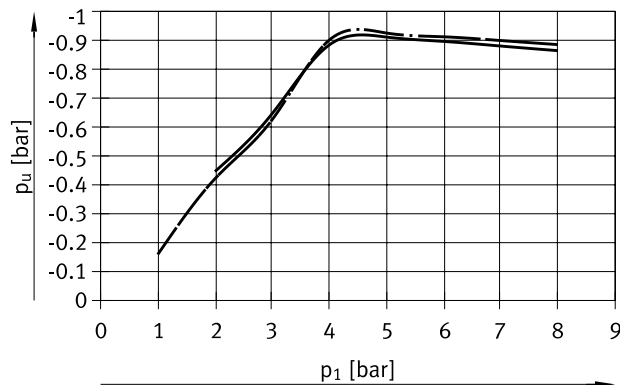

- VN-05-M
- VN-07-M

High suction rate – Inline

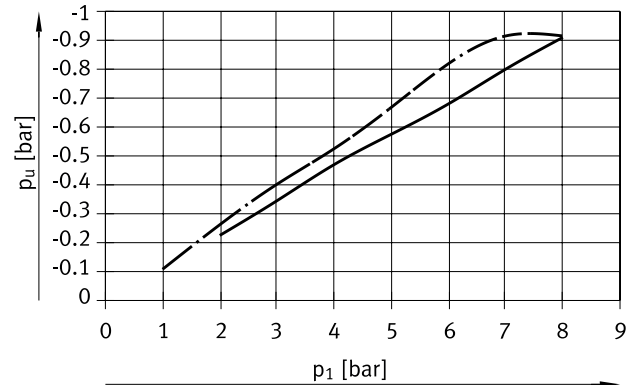


- VN-05-N
- VN-07-N

Datasheet


Evacuation time  $t$  as a function of vacuum  $p_u$  for 1 l volume at 6 bar operating pressure

High vacuum – Standard

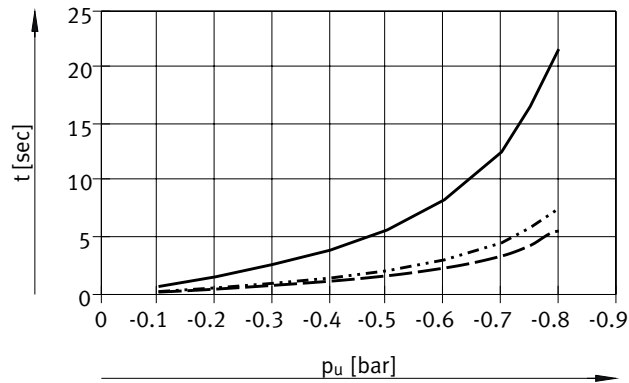


- VN-05-H
- VN-07-H
- - - VN-10-H


High suction rate – Standard

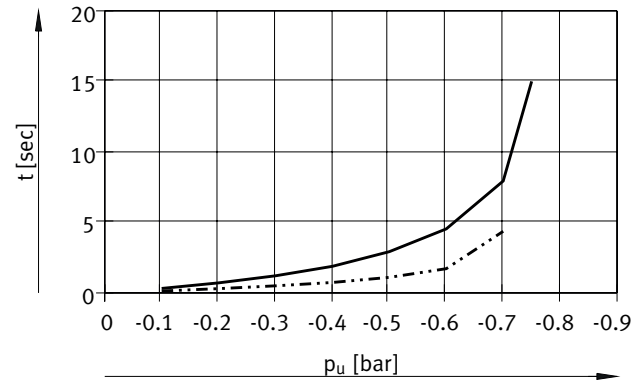

- VN-05-L
- VN-07-L

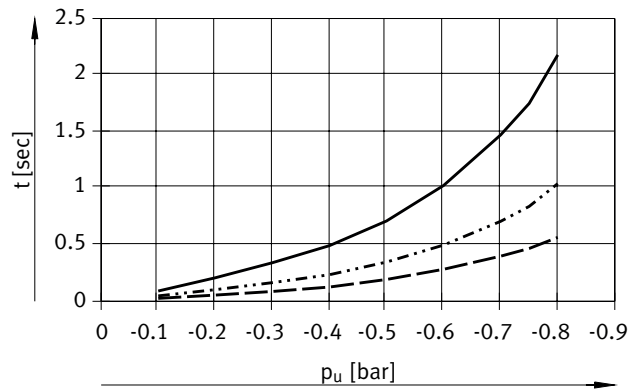


- VN-14-H
- VN-20-H
- - - VN-30-H

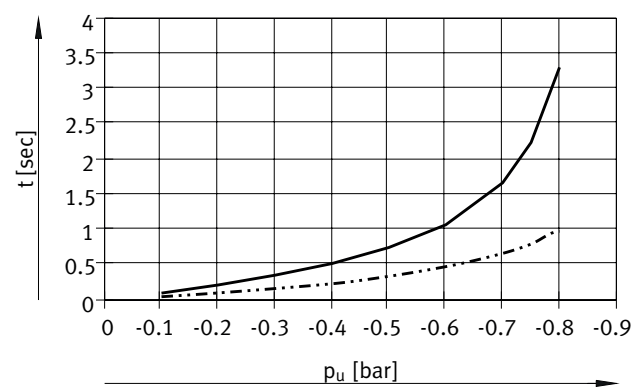


- VN-10-L
- VN-14-L

High vacuum – In-line

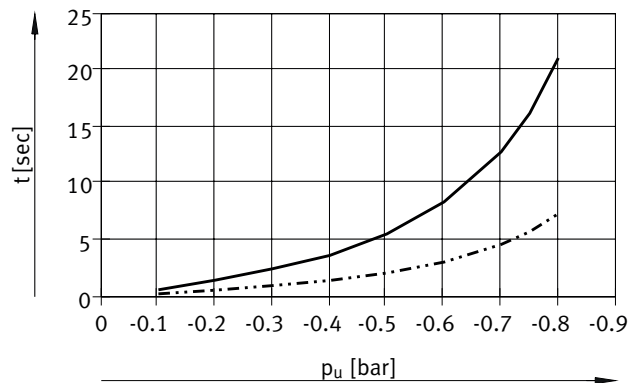

- VN-05-M
- VN-07-M

High suction rate – In-line

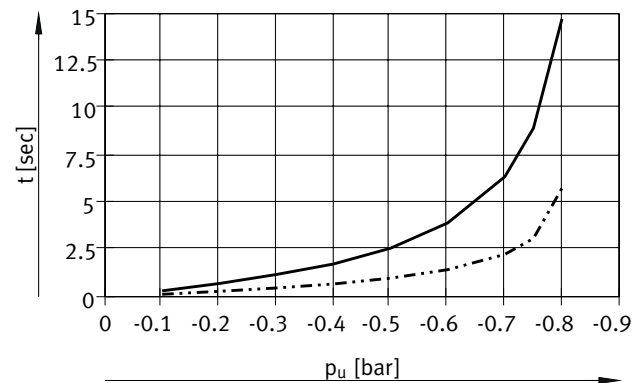


- VN-05-N
- VN-07-N

Datasheet


Suction rate  $q_{ns}$  (with respect to atmosphere) as a function of operating pressure  $p_1$

High vacuum – Standard

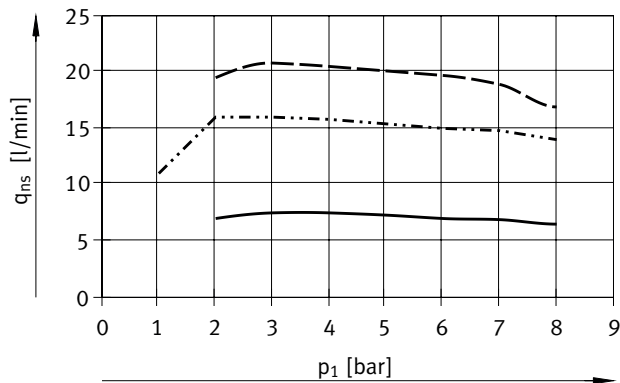


- VN-05-H
- VN-07-H
- - - VN-10-H


High suction rate – Standard

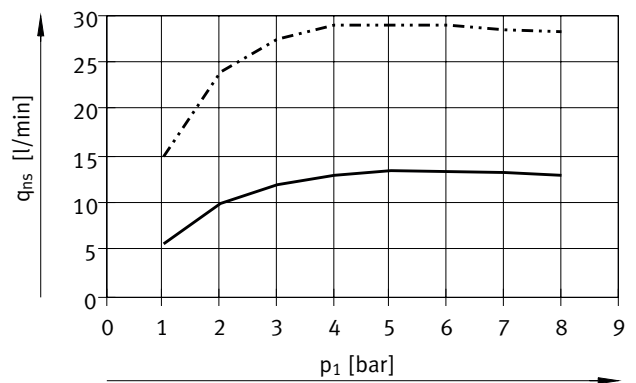

- VN-05-L
- VN-07-L

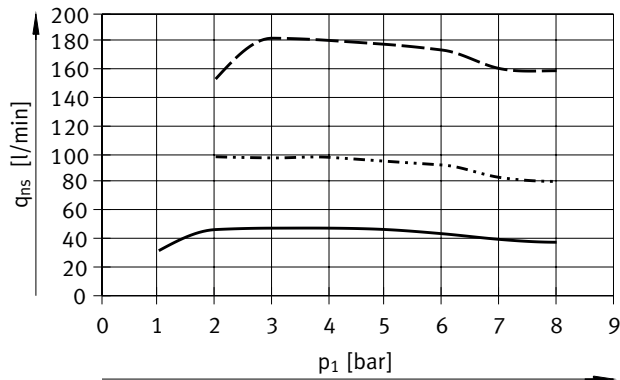


- VN-14-H
- VN-20-H
- - - VN-30-H

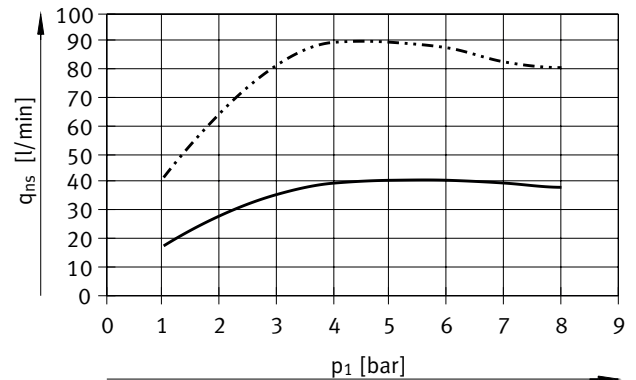


- VN-10-L
- VN-14-L

High vacuum – Inline

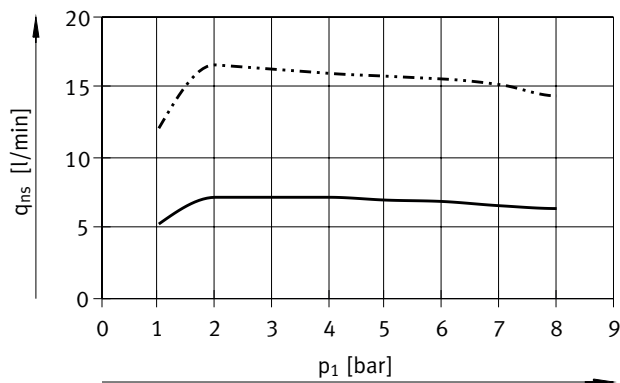

- VN-05-M
- VN-07-M

High suction rate – Inline

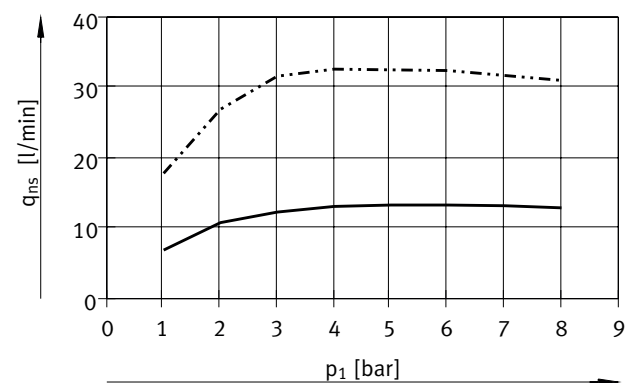


- VN-05-N
- VN-07-N


Datasheet

Air consumption  $q_n$  as a function of operating pressure  $p_1$

High vacuum/high suction rate

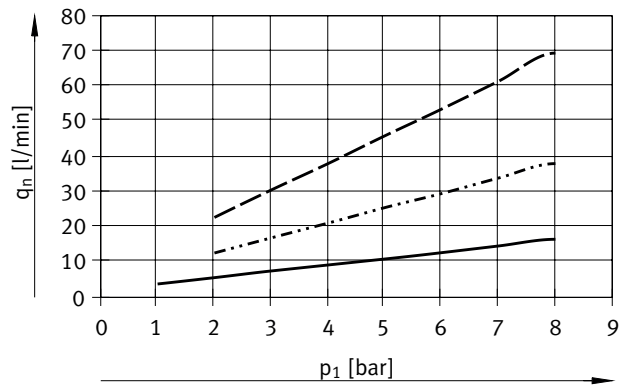


— VN-05  
 ..... VN-07  
 - - - - VN-10

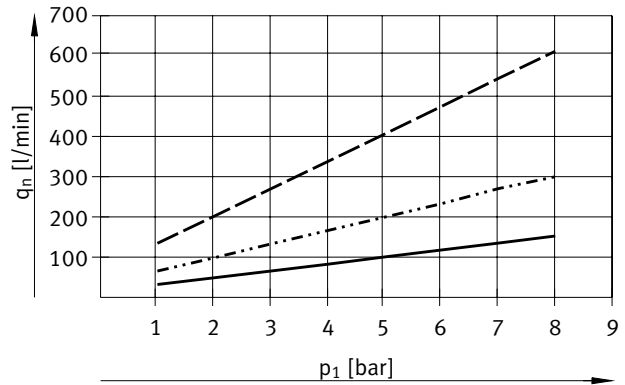

— VN-14  
 ..... VN-20  
 - - - - VN-30


Dimensions – T-shape/standard, VN-05/07/10/14

VN-...-T...-PQ...-VQ...-RO...-A

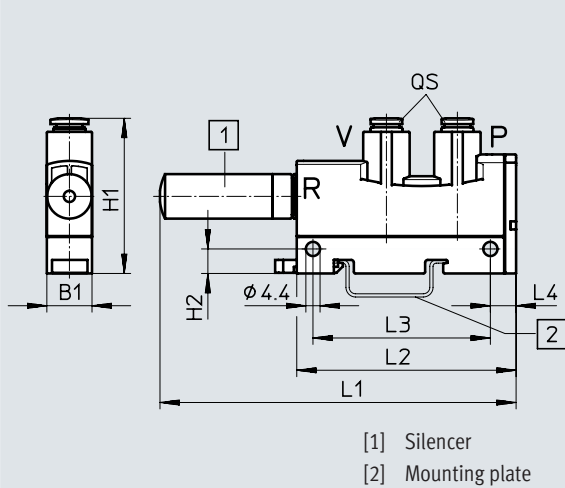


Download CAD data → [www.festo.com](http://www.festo.com)

VN-...-T...-PI...-VI...-RO...-A

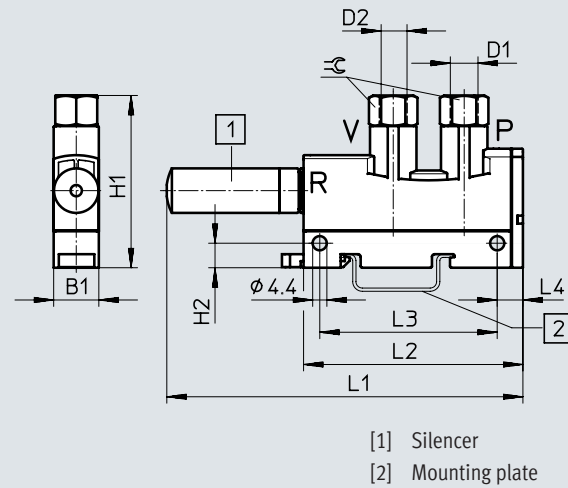

VN-...-T...-PQ...-VQ...-RO...-M/B

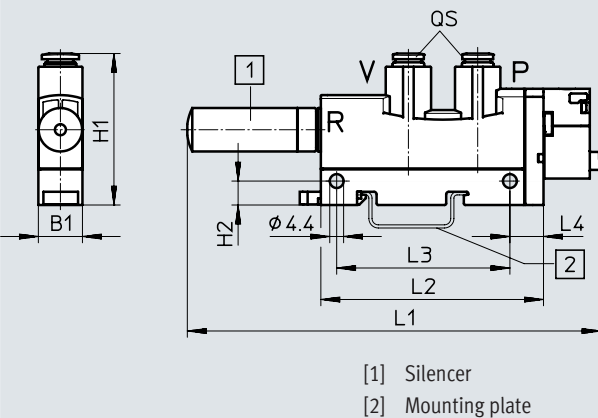



Datasheet


Type	B1	Connections		H1	H2	L1	L2	L3	L4	≅		
		P D1	V D2									
VN-05-...-T3-PQ2-VQ2-RO1-A	14	QS-6	QS-6	48	7.6	110	68	55	8	-		
VN-07-...-T3-PQ2-VQ2-RO1-A						119						
VN-10-...-T3-PQ2-VQ2-RO1-A						110						
VN-05-...-T3-PI4-VI4-RO1-A		G1/8	G1/8			53					119	13
VN-07-...-T3-PI4-VI4-RO1-A												
VN-10-...-T3-PI4-VI4-RO1-A												
VN-14-...-T4-PQ3-VQ3-RO2-A	18	QS-8	QS-8	50	7.5	166	98	63	8.7	-		
VN-14-...-T4-PI5-VI5-RO2-A		G1/4	G1/4	62						17		
VN-05-...-T3-PQ2-VQ2-RO1-M/B	14	QS-6	QS-6	48	7.6	132	71	55	10.7	-		
VN-07-...-T3-PQ2-VQ2-RO1-M/B						141						
VN-10-...-T3-PQ2-VQ2-RO1-M/B												
VN-14-...-T4-PQ3-VQ3-RO2-M/B	18	QS-8	QS-8	50	7.5	192	106	63	16.4	-		

Note: This product conforms to ISO 1179-1 and ISO 228-1.

Dimensions – T-shape/standard, VN-20/30

Download CAD data → [www.festo.com](http://www.festo.com)


VN-...-T6-PQ4-VQ5-RO2-M

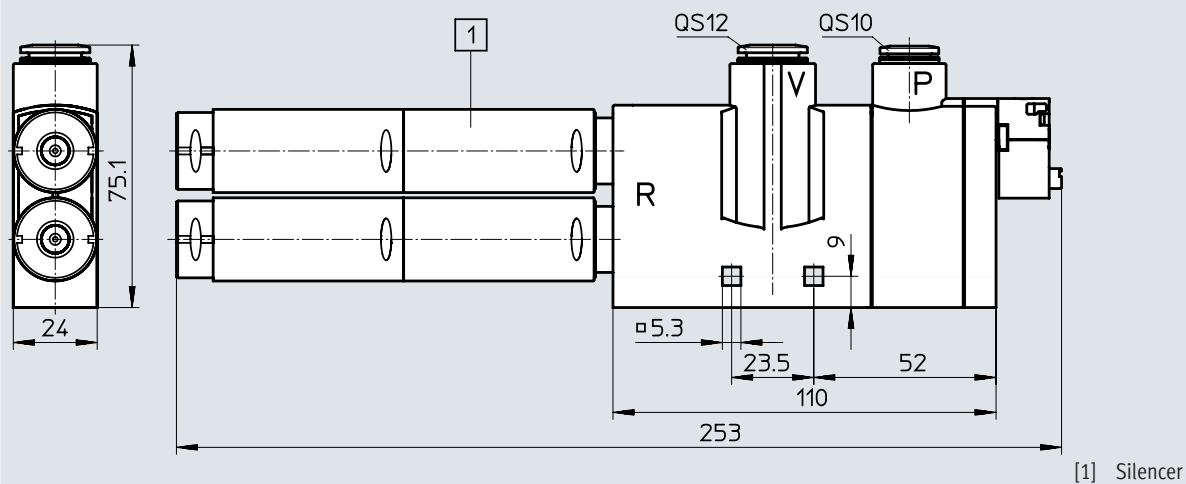

Dimensions – Straight shape/inline, VN-05/07

Download CAD data → [www.festo.com](http://www.festo.com)

VN-05/07-...-I3-PQ2-VQ2-A

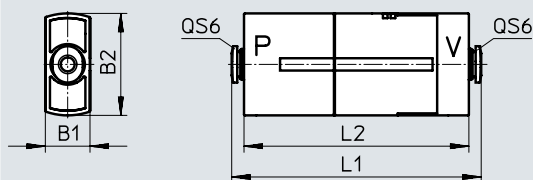

Type	B1	Connections		B2	L1	L2
		P	V			
VN-05-...-I3-PQ2-VQ2-A	14.5	QS-6	QS-6	33.1	81	73
VN-07-...-I3-PQ2-VQ2-A					97	89

## Datasheet

### ★ Core Range

Ordering data and weights – Standard						
T-shape						
Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum H		Weight [g]	High suction rate L	
		Part no.	Type		Part no.	Type
<b>With electric on/off valve, pneumatic ejector pulse, push-in fitting and silencer</b>						
0.95	–	–	–	63	★ 532641	VN-10-L-T3-PQ2-VQ2-R01-B
1.4	–	–	–	100	★ 532649	VN-14-L-T4-PQ3-VQ3-R02-B

Ordering data and weights – Standard						
T-shape						
Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum H		Weight [g]	High suction rate L	
		Part no.	Type		Part no.	Type
<b>With pneumatic ejector pulse, push-in fitting and silencer</b>						
0.45	49	532620	VN-05-H-T3-PQ2-VQ2-R01-A	49	532621	VN-05-L-T3-PQ2-VQ2-R01-A
0.7	50	532628	VN-07-H-T3-PQ2-VQ2-R01-A	50	532629	VN-07-L-T3-PQ2-VQ2-R01-A
0.95	50	532638	VN-10-H-T3-PQ2-VQ2-R01-A	50	532639	VN-10-L-T3-PQ2-VQ2-R01-A
1.4	85	532646	VN-14-H-T4-PQ3-VQ3-R02-A	85	532647	VN-14-L-T4-PQ3-VQ3-R02-A

<b>With pneumatic ejector pulse, female thread and silencer</b>						
0.45	49	537225	VN-05-H-T3-PI4-VI4-R01-A	49	537226	VN-05-L-T3-PI4-VI4-R01-A
0.7	50	532632	VN-07-H-T3-PI4-VI4-R01-A	50	532633	VN-07-L-T3-PI4-VI4-R01-A
0.95	50	532642	VN-10-H-T3-PI4-VI4-R01-A	50	532643	VN-10-L-T3-PI4-VI4-R01-A
1.4	94	532719	VN-14-H-T4-PI5-VI5-R02-A	94	532720	VN-14-L-T4-PI5-VI5-R02-A


<b>With electric on/off valve, push-in fitting and silencer</b>						
0.45	60	532618	VN-05-H-T3-PQ2-VQ2-R01-M	60	532619	VN-05-L-T3-PQ2-VQ2-R01-M
0.7	61	532626	VN-07-H-T3-PQ2-VQ2-R01-M	61	532627	VN-07-L-T3-PQ2-VQ2-R01-M
0.95	61	532636	VN-10-H-T3-PQ2-VQ2-R01-M	61	532637	VN-10-L-T3-PQ2-VQ2-R01-M
1.4	98	532644	VN-14-H-T4-PQ3-VQ3-R02-M	98	532645	VN-14-L-T4-PQ3-VQ3-R02-M
2.0	215	532656	VN-20-H-T6-PQ4-VQ5-R02-M	–	–	–
3.0	215	532662	VN-30-H-T6-PQ4-VQ5-R02-M	–	–	–



<b>With electric on/off valve, pneumatic ejector pulse, push-in fitting and silencer</b>						
0.45	62	532622	VN-05-H-T3-PQ2-VQ2-R01-B	62	532623	VN-05-L-T3-PQ2-VQ2-R01-B
0.7	63	532630	VN-07-H-T3-PQ2-VQ2-R01-B	63	532631	VN-07-L-T3-PQ2-VQ2-R01-B
0.95	63	532640	VN-10-H-T3-PQ2-VQ2-R01-B	–	–	–
1.4	100	532648	VN-14-H-T4-PQ3-VQ3-R02-B	–	–	–

Ordering data and weights – Inline						
Straight shape						
Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum M		Weight [g]	High suction rate N	
		Part no.	Type		Part no.	Type
<b>With pneumatic ejector pulse and push-in connector</b>						
0.45	38	532624	VN-05-M-I3-PQ2-VQ2-A	38	532625	VN-05-N-I3-PQ2-VQ2-A
0.7	41	532634	VN-07-M-I3-PQ2-VQ2-A	41	532635	VN-07-N-I3-PQ2-VQ2-A

## Datasheet

Function



-  - Temperature range  
0 ... +60°C
-  - Operating pressure  
1 ... 8 bar



General technical data						
Type		VN-05	VN-07	VN-10	VN-14	VN-20
Nominal width of Laval nozzle	[mm]	0.45	0.7	0.95	1.4	2.0
Ejector characteristic		High vacuum/standard H				
		High suction rate/standard L				
Mounting position		Any				

Operating and environmental conditions		
Operating pressure	[bar]	1 ... 8
Nominal operating pressure	[bar]	6
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
Note on the operating/pilot medium		Lubricated operation not possible
Ambient temperature	[°C]	0 ... +60
Temperature of medium	[°C]	0 ... +60
Corrosion resistance class CRC <sup>1)</sup>		2


 1) More information: [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

Performance data – High vacuum						
Ejector characteristic		Standard H				
Nominal width of Laval nozzle	[mm]	0.45	0.7	0.95	1.4	2.0
Max. vacuum	[%]	92	92	93	92	92
Operating pressure for max. vacuum	[bar]	4.9	4.4	3.5	3.5	3.5
Max. suction rate with respect to atmosphere	[l/min]	7.2	16.2	21.8	48.8	98
Operating pressure for max. suction rate	[bar]	3	3	3	2	2
Pressurisation time at nominal operating pressure 6 bar (for 1 l volume)	[s]	4.43	1.67	1.02	0.48	0.23

## Datasheet

### Performance data – High suction rate

Ejector characteristic	Standard L					
Nominal width of Laval nozzle [mm]	0.45	0.7	0.95	1.4	2.0	
Max. suction rate with respect to atmosphere [l/min]	13.6	30.9	41.5	92.6	184.4	
Operating pressure for max. suction rate [bar]	5	4	5	5	5	
Pressurisation time at nominal operating pressure 6 bar (for 1 l volume) [s]	2.04	0.82	0.66	0.31	0.17	

 **Note**


Connecting two vacuum generator cartridges in parallel doubles the suction rate. This corresponds to the next higher power level.

Example:

2x20-H corresponds to 1x30-H


### Materials

Sectional view

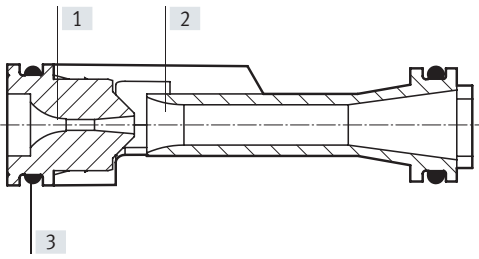

Vacuum generator cartridge VN-05/07/10/14/20

[1]	Jet nozzle	Wrought aluminium alloy
[2]	Female nozzle	POM
[3]	Seals	NBR
LABS (PWIS) conformity		VDMA24364-B1/B2-L

 **Note**

The graphs for the technical data of the vacuum generator cartridge match those for vacuum generator VN-A/B/M.


→ from page 37.

Datasheet


Dimensions

Download CAD data → [www.festo.com](http://www.festo.com)


VN-05



VN-07/10

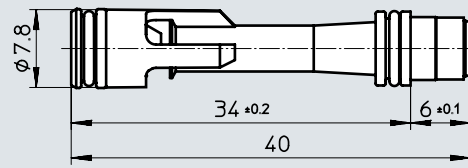



VN-14/20

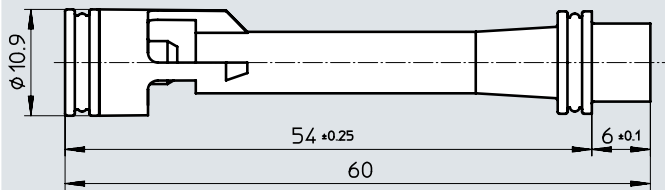

Locating hole for the vacuum generator cartridge

Dimensions

Installing the vacuum generator cartridge

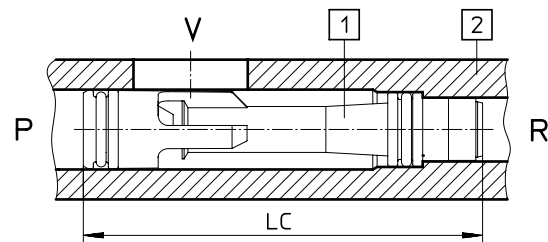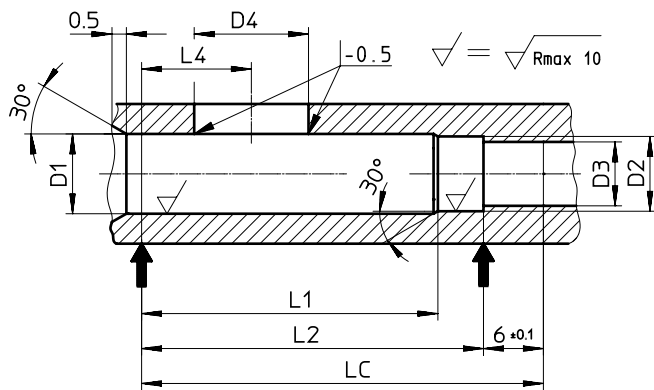

- [1] Vacuum generator cartridge
- [2] Customer-specific housing

Type	Dimensions of the locating hole						Vacuum connection		
	D1 <sup>1)</sup> +0.05	D2	D3	L1	L2 ±0.2	LC <sup>2)</sup>	L4 ±0.2	D4 min. ø <sup>3)</sup>   max. ø	
VN-05	6	5.7 <sup>+0.05</sup>	4.9 <sup>+0.1</sup>	14	19	25	9.5	3.0	3.5
VN-07	8	7.5 <sup>+0.05</sup>	6.5 <sup>+0.1</sup>	29	34	40	11	6.0	7.5
VN-10									
VN-14	11.1	10.7 <sup>-0.05</sup>	9.4 ± 0.1	49	54	60	13	12.8	15.6
VN-20									

- 1) For D1 with diameter of 11.1: for a threaded connection G1/4, choose the core diameter 11.8 \*<sup>+0.1</sup>
- 2) Length of the vacuum generator cartridge
- 3) Minimum cross section, Festo recommends the largest cross section possible

Ordering data and weight

Nominal width of Laval nozzle [mm]	Weight [g]	High vacuum H		Weight [g]	High suction rate L	
		Part no.	Type		Part no.	Type
0.45	0.65	547693	VN-05-H	0.65	547694	VN-05-L
0.7	1.65	547695	VN-07-H	1.65	547696	VN-07-L
0.95	1.65	547697	VN-10-H	1.65	547698	VN-10-L
1.4	3.75	547699	VN-14-H	3.75	547700	VN-14-L
2.0	3.75	547701	VN-20-H	3.75	547702	VN-20-L



## Accessories

### Mounting plate VN-...-BP-NRH

For vacuum generator VN  
For mounting on H-rail or via through-hole

Ambient temperature: 0°... +60°C

Material:  
Plate VN-T2/T3/T4: Reinforced POM  
Plate VN-T6: Reinforced PA  
Slide: POM  
LABS (PWIS) conformity:  
VDMA24364-B1/B2-L

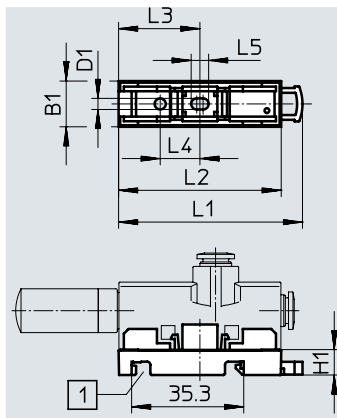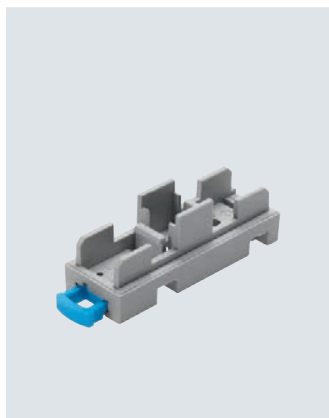

**Note**  
Horizontal wall mounting is not permitted with mounting plate VN-T6-BP-NRH.

1) Suitable for H-rail 35x7.5 to DIN EN 50022

#### Dimensions and ordering data


For grid dimension [mm]	B1	D1	H1	L1	L2	L3	L4	L5	CRC <sup>1)</sup>	Weight [g]	Part no.	Type
10	10.4	3.5	8	56.5	51	25.5	12.5	5.5	2	3.5	196951	VN-T2-BP-NRH
14	14.4	3.5	8	57.9	51.2	25.6	12.5	5.5	2	4.5	193641	VN-T3-BP-NRH
18	18.4									5.5	195279	VN-T4-BP-NRH
24	24	4.3	7.3	98	91	45.5	32.5	6.3	2	12.4	196956	VN-T6-BP-NRH

1) More information: [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)

### Mounting plate VN-...-BP

For vacuum generator VN-A/B/M  
For wall mounting via through-hole for housing type T3/T4

Material:  
Plate: Galvanised steel  
Note on materials: RoHS-compliant  
LABS (PWIS) conformity:  
VDMA24364-B1/B2-L

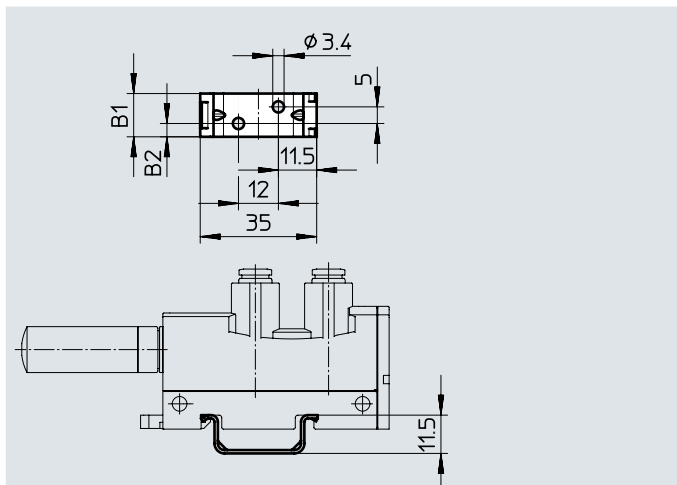

**Note**  
Mounting plate VN-T6-BP-NRH should be used for housing type T6.


#### Dimensions and ordering data



For grid dimension [mm]	B1	B2	CRC <sup>1)</sup>	Weight [g]	Part no.	Type
14	13	4	2	4.8	547436	VN-T3-BP
18	17	6		6.4	547437	VN-T4-BP

1) More information: [www.festo.com/x/topic/crc](http://www.festo.com/x/topic/crc)


## Accessories


## ★ Core Range

Ordering data – Silencer UO				Datasheets → Internet: uo	
	For grid dimension [mm]	Pneumatic connection	Part no.	Type	
	10 (VN-...-T2-...-R01 only)	M7	197582	UO-M7	
	14	G1/8	197583	UO-1/8	
	18	G1/4	197584	UO-1/4	

Ordering data – Silencer AMTE					Datasheets → Internet: amte	
	For grid dimension [mm]	Pneumatic connection	Part no.	Type	PU <sup>1)</sup>	
<b>Short version</b>						
	10	M5	1206621	AMTE-M-H-M5	20	
	14	G1/8	1206622	AMTE-M-H-G18	20	
	18	G1/4	1206623	AMTE-M-H-G14	20	
<b>Long version</b>						
	10	M5	★ 1205858	AMTE-M-LH-M5	20	
	14	G1/8	★ 1205860	AMTE-M-LH-G18	20	
	18	G1/4	★ 1205861	AMTE-M-LH-G14	20	



1) Packaging unit



Ordering data – Silencer UOM				Datasheets → Internet: uom	
	For grid dimension [mm]	Pneumatic connection	Part no.	Type	
	18	G1/4	538432	UOM-1/4	
	24	G3/8	538433	UOM-3/8	

Ordering data – Silencer extension UOMS				Datasheets → Internet: uoms	
	For grid dimension [mm]	Pneumatic connection	Part no.	Type	
	18	–	538436	UOMS-1/4	
	24	–	538437	UOMS-3/8	

## Accessories

### ★ Core Range

Ordering data – Connecting cable NEBU-M8					Datasheets → Internet: nebu
	Electrical connection	Number of wires	Cable length [m]	Part no.	Type
	M8x1, straight socket	3	2.5	★ 541333	NEBU-M8G3-K-2.5-LE3
			5	★ 541334	NEBU-M8G3-K-5-LE3
	M8x1, angled socket	3	2.5	★ 541338	NEBU-M8W3-K-2.5-LE3
			5	★ 541341	NEBU-M8W3-K-5-LE3

Ordering data – Plug socket with cable NEBV					Datasheets → Internet: nebu
	Cable composition	Product weight [g]	Cable length [m]	Part no.	Type
	2 individual cables	4	0.5	★ 566654	NEBV-H1G2-KN-0.5-N-LE2
		7	1	★ 566655	NEBV-H1G2-KN-1-N-LE2
		17	2.5	★ 566656	NEBV-H1G2-KN-2.5-N-LE2
		31	5	566657	NEBV-H1G2-KN-5-N-LE2
	Cable, 2-wire	8	0.5	★ 566658	NEBV-H1G2-P-0.5-N-LE2
		16	1	★ 566659	NEBV-H1G2-P-1-N-LE2
		35	2.5	★ 566660	NEBV-H1G2-P-2.5-N-LE2
		70	5	566661	NEBV-H1G2-P-5-N-LE2



# Festo - Your Partner in Automation



**1 Festo Inc.**  
5300 Explorer Drive  
Mississauga, ON L4W 5G4  
Canada

**Festo Customer Interaction Center**  
Tel: 1 877 463 3786  
Fax: 1 877 393 3786  
Email: [customer.service.ca@festo.com](mailto:customer.service.ca@festo.com)



**2 Festo Pneumatic**  
Av. Ceylán 3,  
Col. Tequesquináhuac  
54020 Tlalnepantla,  
Estado de México

**Multinational Contact Center**  
01 800 337 8669  
[ventas.mexico@festo.com](mailto:ventas.mexico@festo.com)



**3 Festo Corporation**  
1377 Motor Parkway  
Suite 310  
Islandia, NY 11749

**Festo Customer Interaction Center**  
1 800 993 3786  
1 800 963 3786  
[customer.service.us@festo.com](mailto:customer.service.us@festo.com)



**4 Regional Service Center**  
7777 Columbia Road  
Mason, OH 45040

Connect with us



[www.festo.com/socialmedia](http://www.festo.com/socialmedia)



[www.festo.com](http://www.festo.com)

Subject to change