



by Schneider Electric

## Basic Rack PDU


### Overview

The APC by Schneider Electric Basic Rack PDU distributes power to devices in the rack.

**Outlets.** The Rack PDU has twenty-four NEMA 5-20 outlets.

**Power cord.** The 10-foot (3.05-meter) power cord terminates with a NEMA L5-30 connector.

**AP7532**

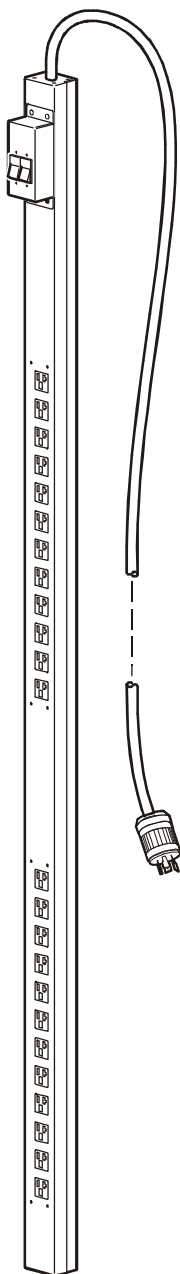

# Specifications

---

## Electrical

---

Input connector	NEMA L5-30 plug
Output connectors	24–NEMA 5-20 outlets
Nominal input voltage	120 VAC
Acceptable input voltage	± 10% of normal voltage
Input frequency	50/60 Hz

---

## Physical

---

Size (H × W × D)	63.75 x 2.19 x 1.73 in (161.92 x 5.56 x 4.39 cm)
Shipping Dimensions (H × W × D)	84.00 x 6.00 x 5.00 in (213.36 x 15.24 x 12.7 cm)
Weight	12.25 lb (5.56 kg)
Shipping weight	14.25 lb (6.46 kg)

---

## Environmental

---

Elevation (above MSL)	
Operating	0 – 15,000 ft (0 – 4500 m)
Storage	0 – 50,000 ft (0 – 15 000 m)
Temperature	
Operating	23 to 115° F (–5 to 45° C)
Storage	–13 to 149° F (–25 to 65° C)
Humidity	
Operating	5 – 95% RH non-condensing
Storage	5 – 95% RH non-condensing

---

## Compliance

---

Safety verification	cULus
---------------------	-------

---

You can find customer support and warranty information on the APC website, [www.apc.com](http://www.apc.com).

© 2021 APC by Schneider Electric. All rights reserved.