

# 3-Color Display

# Digital Flow Switch

Applicable fluid **Dry air, N<sub>2</sub>**



**IP65**

**IO-Link**  
\* For the PFMC7□-L

## 3-color/2-screen display\*1

The PFMC7 series is to be discontinued as of October 2021. Please consider ordering the new PF2MC7 series as a substitute. See [here](#) for details.


\*1 2-row display of main screen and sub screen

## Expanded flow range

A wide range of flow measurement is possible with 1 product.

Flow ratio\*2 **100:1**

\*2 Rated flow ratio is 10 : 1 for the existing PF2A series model.

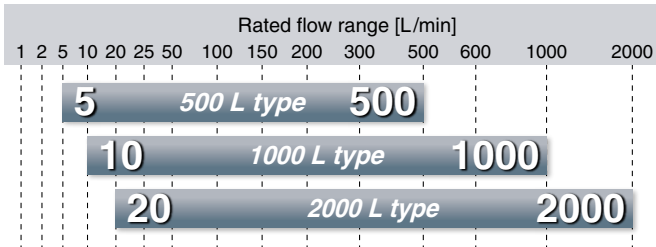

**New**

## IO-Link Compatible

The flow rate value and the device status can be figured out easily via the process data. [p. 2](#)

### Diagnosis items

- Over current error
- Above the rated/accumulated flow range
- Below the rated/accumulated flow range
- Internal product malfunction



## Smallest settable increment

**1 L/min**

5 L/min for the for the existing PF2A series model



### 3-Screen Display

**Digital Flow Monitor**  
Allows for the monitoring of remote lines



PFG300 Series

# PFMC7□(-L) Series



CAT.ES100-115C <sup>Ⓐ</sup>

# 3-Color Display Digital Flow Switch


## PFMC7(-L) Series p. 9



### Rotary display

Display can be rotated in increments of 45° to suit the installation conditions. Easy operation, improved visibility


Counterclockwise 90°  
Clockwise 225°



### Functions pp. 24, 25


- Output operation
- Display color
- Reference condition
- Display mode
- Response time
- External input function
- Forced output function
- Accumulated value hold
- Selection of display on sub screen
- Display OFF mode
- Setting of security code
- Peak/Bottom value display
- Key-lock function
- Analog output free range function
- Error display function

#### Installation example

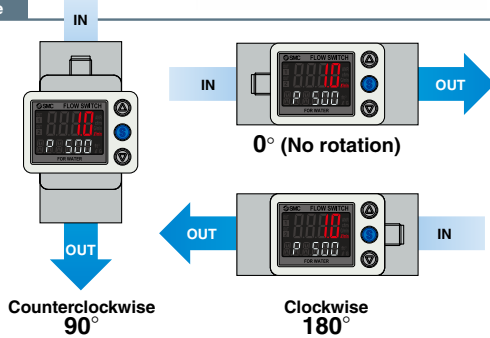

### Bypass structure

Bypass structure with protruding part at the main piping, reduces the contact of moist air with the sensor, reducing degradation of the sensor and maintaining accuracy.

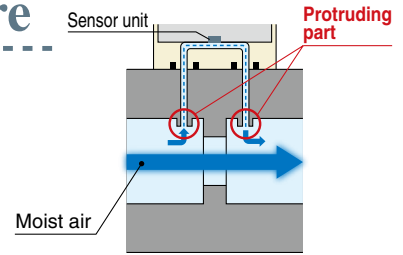

### Response time (Digital filter)

Can be selected from **50 ms (0.05 s) / 0.1 s / 0.5 s / 1.0 s / 2.0 s**

Response time can be set depending on application.  
\* For IO-Link compatible products, 5.0 s can also be selected.

### Grease-free

### Applications

■ Flow control of equipment, main line and branch line

Remote control is possible with accumulated pulse.


Refer to the Web Catalog for details of the multi-counter CEU5.

■ The accumulated indication shows the operating flow rate or residual amount (of N<sub>2</sub>, etc.) in a gas cylinder.

■ Flow control of the air for spray painting

\* The product is not designed to be explosion proof.

#### Example of recommended pneumatic circuit

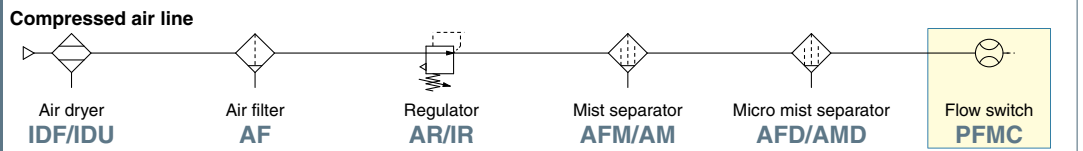


\* Recommended air quality class: JIS B 8392-1 1.1.2 to 1.6.2 (ISO 8753-1 1.1.2 to 1.6.2)

### Select a digital flow switch to increase energy savings!

Flow control is necessary for promoting energy saving in any application. Saving energy starts from numerical control of the flow consumption of equipment and lines and clarification of the purpose and effect.

- Digital display allows **visualization**.
- 3-color/2-screen display, Improved visibility
- Remote control is possible with accumulated pulse.

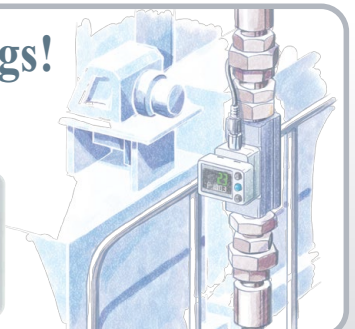


# IO-Link Compatible PPMC7□-□□-L□-□□□

## Supports the IO-Link communication protocol



IO-Link is an open communication interface technology between the sensor/actuator and the I/O terminal that is an international standard: IEC 61131-9.

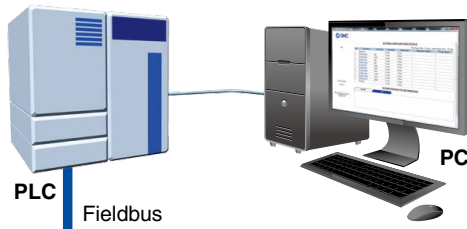

**Configuration File (IODD File\*1)**  
 · Manufacturer · Product part no. · Set value

\*1 IODD File:  
 IODD is an abbreviation of IO Device Description. This file is necessary for setting the device and connecting it to a master. Save the IODD file on the PC to be used to set the device prior to use.

Device settings can be set by the master.

- Threshold value
- Operation mode, etc.

Read the device data.

- Switch ON/OFF signal and analog value
- Device information: Manufacturer, Product part number, Serial number, etc.
- Normal or abnormal device status
- Cable breakage

IO-Link Master

IO-Link Compatible Device:  
 Digital Flow Switch for Air

## Implement diagnostic bits in the process data.

The diagnostic bit in the cyclic process data makes it easy to find problems with the equipment.

It is possible to find problems with the equipment in real time using the cyclic (periodic) data and to monitor such problems in detail with the noncyclic (aperiodic) data.

### Process Data

Bit offset	Item	Note
0	OUT1 output	0: OFF 1: ON
1	OUT2 output	0: OFF 1: ON
8	Flow rate diagnosis	0: OFF 1: ON
14	Fixed output	0: OFF 1: ON
15	Error (Failure)	0: OFF 1: ON
16 to 31	Measured flow rate value	Signed 16 bit


Diagnosis items
• Over current error
• Above the rated flow range
• Above the accumulated flow range
• Below the rated flow range
• Below the accumulated flow range
• Internal product malfunction

Bit offset	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Item	Measured flow rate value (PD)															

Bit offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Item	Error (Failure)	Fixed output	Reservation					Flow rate diagnosis	Reservation					OUT2	OUT1	Switch output

### Application Example

#### For the control of air consumption

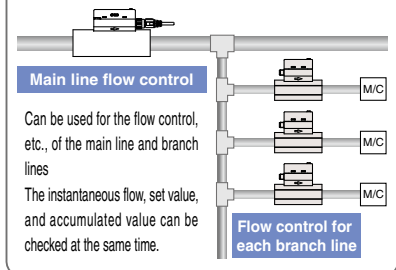

## Display function

Displays the output communication status and indicates the presence of communication data



### Operation and Display

Communication with master	IO-Link status indicator light	Status	Screen display*2	Description		
Yes	*1	Normal	Operate	Mode oPE	Normal communication status (readout of measured value)	
			Start up	Mode 5.10		
			Preoperate	Mode PrE		
No	*1 (Flashing)	Abnormal	Version does not match	Er 15 V 10	The IO-Link version does not match that of the master. * The applicable IO-Link version is 1.1.	
			Communication disconnection	Mode oPE		Normal communication was not received for 1 s or longer.
				Mode 5.10		
	OFF	SIO mode	Mode 5.10	General switch output		

\*1 In IO-Link mode, the IO-Link indicator is ON or flashing. \*2 When the lower line (sub screen) is set to mode display

\* "ModE LoC" is displayed when the data storage lock is enabled. (Except for when the version does not match or when in SIO mode)




# 3-Screen Display Digital Flow Monitor

## PFG300 Series p. 18




### Allows for the monitoring of remote lines

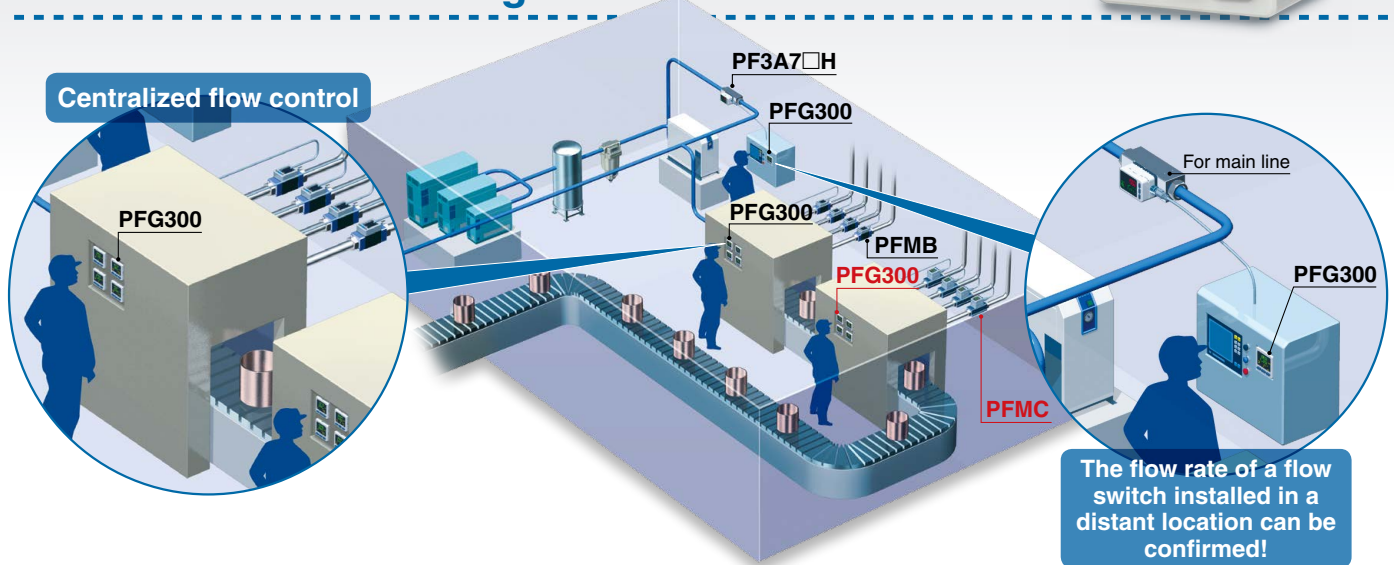

### Visualization of settings


The sub screen (label) shows the item to be set.

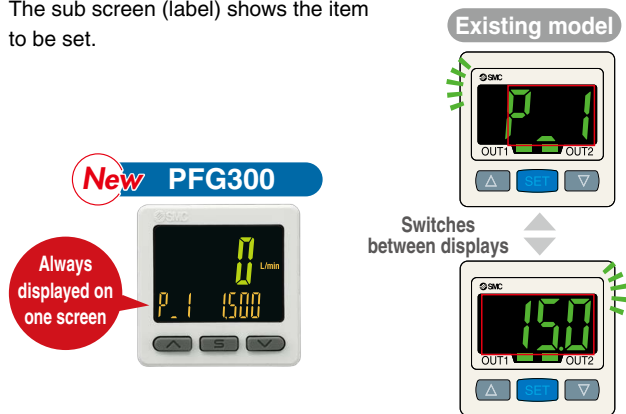


Mode Examples	Hysteresis mode					
	Normal output	Set value (Threshold value)	Reversed output	Set value (Threshold value)	Hysteresis	Set hysteresis value
	P.L	1500	n.L	1500	H.L	150
Mode Examples	Window comparator mode					
	Normal output/Lo side	Set value (Threshold value)	Normal output/Hi side	Set value (Threshold value)		
	P.L	900	P.H	1800		
	Reversed output/Lo side	Set value (Threshold value)	Reversed output/Hi side	Set value (Threshold value)		
	n.L	900	n.H	1800		

### Easy screen switching

It is possible to change the settings while checking the measured value.

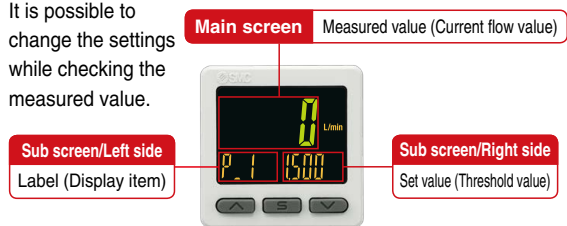



The sub screen can be switched by pressing the up/down buttons.

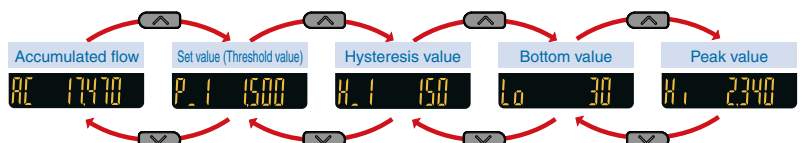

\* Either "Input of line name" or "Display OFF" can be added via the function settings.

### Simple 3-step setting


When the S button is pressed and the set value (P\_1) is being displayed, the set value (threshold value) can be set. When the S button is pressed and the hysteresis (H\_1) is being displayed, the hysteresis value can be set.

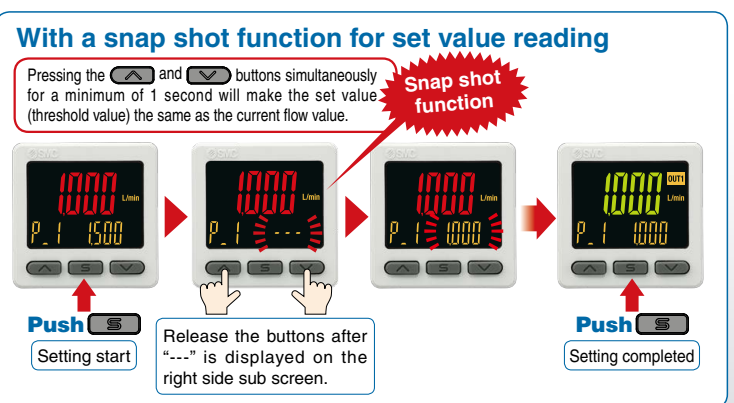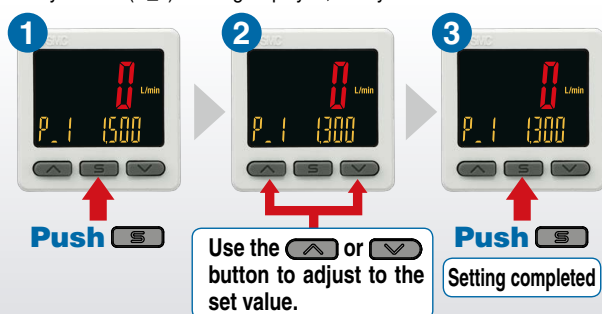



## NPN/PNP switch function

The number of stock items can be reduced.

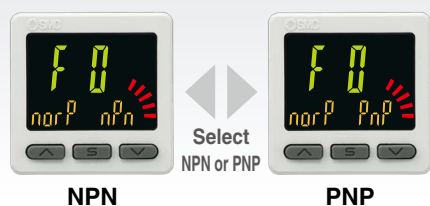


## Analog output of 0 to 10 V is also available.

Voltage output	1 to 5 V	Switchable
	0 to 10 V	
Current output	4 to 20 mA	Fixed

## Convenient functions

### ● Copy function

The set values of the monitor can be copied.

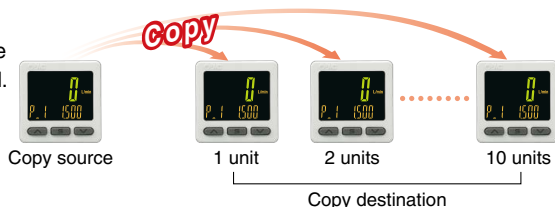

### ● Security code

The key locking function keeps unauthorized persons from tampering with the settings.

### ● Power saving function

Power consumption is reduced by turning off the monitor.

Current consumption*1	Reduction rate*2
25 mA or less	Approx. 50% reduction

\*1 During normal operation \*2 In power saving mode

### ● External input function

The accumulated value, peak value, and bottom value can be reset remotely.


## Functions pp. 26 to 28

- Output operation
- Simple setting mode
- Display color
- Delay time setting
- Digital filter setting
- FUNC output switching function
- Selectable analog output function
- External input function
- Forced output function
- Accumulated value hold
- Peak/Bottom value display
- Setting of security code
- Key-lock function
- Reset to the default settings
- Display with zero cut-off setting
- Selection of display on sub screen
- Analog output free range function
- Error display function
- Copy function
- Selection of power saving mode

## Mounting


Bracket configuration allows for mounting in four orientations.

### Bracket A

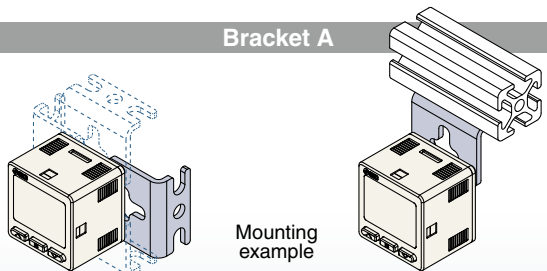

Mounting example

### Bracket B

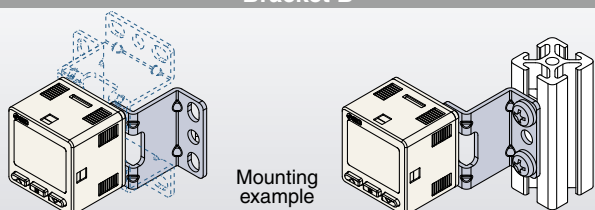


Mounting example

### Panel mounting

Mountable side by side without clearance

### One opening!

- Reduced panel fitting labor
- Space saving

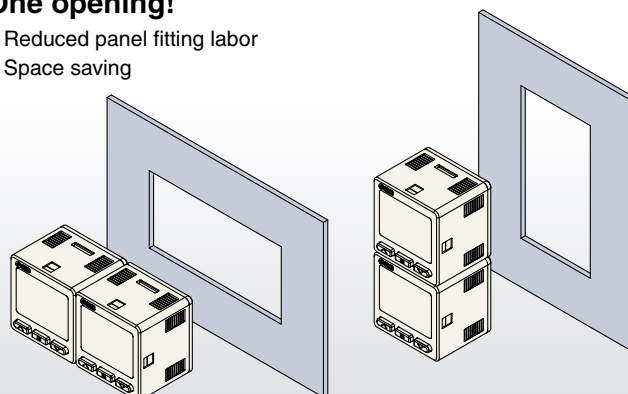


## Input range selection (for Pressure/Flow rate)

The displayed value to the sensor input can be set as required.


(Voltage input: 1 to 5 V/Current input: 4 to 20 mA)

Pressure switch/Flow switch can be displayed.



A is displayed for 1 V (or 4 mA).  
B is displayed for 5 V (or 20 mA).  
The range can be set as required.

■ Pressure Sensor for General Fluids/PSE570




	A	B
PSE570	0	1000
PSE573	-100	100
PSE574	0	500

Set A and B to the values shown in the table above.

## Compact & Lightweight

### ● Compact: Max. 6 mm shorter


### ● Lightweight: Max. 5 g lighter (30 g → 25 g)

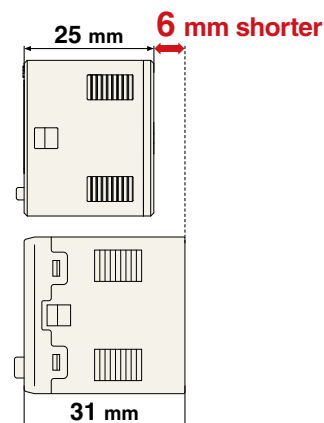










PFG300

PFM300

# Flow Switch Flow Rate Variations

Series	Applicable fluid	Detection method	Rated flow range [L/min]									
			-3	-2	-1	-0.5	0	0.5	1	2	3	
<b>PFMV</b> 	Dry air N <sub>2</sub>	Thermal type (MEMS)	0	0.5								
			0	1								
			0	3								
			-0.5	0.5								
			-1	1								

Series	Applicable fluid	Detection method	Smallest settable increment	Rated flow range [L/min]																				
				0.1	0.2	0.5	1	2	5	10	20	25	50	100	150	200	300	500	600	1000	2000	3000	6000	12000
<b>PF2M7(-L)</b> 	Dry air N <sub>2</sub> Ar CO <sub>2</sub>	Thermal type (MEMS)	0.001 L/min	0.01	1																			
			0.01 L/min	0.02	2																			
			0.1 L/min	0.05	5																			
			0.1 L/min	0.1	10																			
<b>PFMB</b>  <b>PFG300</b> 	Dry air N <sub>2</sub>	Thermal type (MEMS)	1 L/min	2	200																			
		Bypass flow type	1 L/min	5	500																			
		Bypass flow type	1 L/min	10	1000																			
<b>PFMC7(-L)</b> <p>p. 9</p>  <b>PFG300</b> <p>p. 18</p> 	Dry air N <sub>2</sub>	Thermal type (MEMS)	1 L/min	5	500																			
		Bypass flow type	1 L/min	10	1000																			
		Bypass flow type	1 L/min	20	2000																			
<b>PF2A</b> 	Air N <sub>2</sub>	Thermal type (Thermistor)	0.1 L/min	1	10																			
			0.5 L/min	5	50																			
			1 L/min	10	100																			
			2 L/min	20	200																			
			5 L/min	50	500																			
<b>PF3A7□H(-L)</b>  Large flow type  Modular type <b>PFG300</b> 	Air N <sub>2</sub>	Thermal type (Platinum sensor)	2 L/min	30	Large flow type	3000																		
		5 L/min	60	Large flow type	6000																			
		10 L/min	120	Large flow type	12000																			
		Bypass flow type	1 L/min	10	Modular type	1000																		
		Bypass flow type	2 L/min	20	Modular type	2000																		

# Flow Switch Variations / Basic Performance Table

Series	PFMV	PF2M7(-L)	PFMB	PFMC7(-L) <span style="background-color: #FFDAB9;">p. 9</span>	PF2A	PF3A7□H(-L)
Enclosure	IP40	IP40	IP40	IP65 [Monitor unit: IP40]	IP65	IP65 [Monitor unit: IP40]
Fluid	Dry air, N <sub>2</sub>	Dry air, N <sub>2</sub> , Ar, CO <sub>2</sub>	Dry air, N <sub>2</sub>	Dry air, N <sub>2</sub>	Air, N <sub>2</sub>	Air, N <sub>2</sub>
Setting	Digital	Digital	Digital	Digital	Digital	Digital
Rated flow range [L/min]	0 to 0.5 0 to 1 0 to 3	-0.5 to 0.5 -1 to 1 -3 to 3	0.01 to 1 0.02 to 2 0.05 to 5 0.1 to 10 0.3 to 25 0.5 to 50 1 to 100	5 to 500 10 to 1000 20 to 2000	1 to 10 5 to 50 10 to 100 20 to 200 50 to 500	30 to 3000 60 to 6000 120 to 12000
Power supply voltage	12 to 24 VDC ±10%	PF2M7 12 to 24 VDC ±10% PF2M7-L 18 to 30 VDC ±10%	12 to 24 VDC ±10%	PFMC 12 to 24 VDC ±10% PFMC-L 18 to 30 VDC ±10%	12 to 24 VDC ±10%	PF3A7□H 24 VDC ±10% PF3A7□H-L 18 to 30 VDC ±10% PF3A701/ 702H-L 21.6 to 30 VDC
Temperature characteristics (25°C standard)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit: ±0.5% F.S. (0 to 50°C)]	±3% F.S. ±1 digit (15 to 35°C) ±5% F.S. ±1 digit (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit: ±0.5% F.S. (0 to 50°C)]	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit: ±0.5% F.S. (0 to 50°C)]	±3% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C)	±5% F.S. (0 to 50°C) [Monitor unit: ±0.5% F.S. (0 to 50°C)]
Repeatability	±2% F.S. (Fluid: Dry air) Analog output: ±5% F.S. [Monitor unit: ±0.1% F.S. Analog output: ±0.3% F.S.]	±1% F.S. ±1 digit (Fluid: Dry air)	±1% F.S. (Fluid: Dry air) [Monitor unit: ±0.1% F.S. ±1 digit]	±1% F.S. (Fluid: Dry air) [Monitor unit: ±0.1% F.S. ±1 digit]	±1% F.S. (PF2A7□0) ±2% F.S. (PF2A7□1)	±1% F.S. [Monitor unit: ±0.1% F.S. ±1 digit]
Hysteresis	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Fixed (3 digits)	Hysteresis mode: Variable Window comparator mode: Variable
Output	NPN/PNP open collector Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output
Display	[Monitor unit: 2-color LCD display]	2-color LCD display	2-color LED display 2-color LCD display [Monitor unit: 3-color LCD display]	3-color LCD display	LED display	3-color LCD display

\* The monitor unit values are for the PFG300 and PFMV3.





# CONTENTS

- 3-Color Display** Digital Flow Switch *PFMC7 Series*
- 3-Color Display** IO-Link Compatible  
Digital Flow Switch *PFMC7-L Series*
- 3-Screen Display** Digital Flow Monitor *PFG300 Series*



**3-Color Display** Digital Flow Switch **PFMC7 Series**

How to Order ..... p. 9  
 Specifications ..... p. 10

**3-Color Display** IO-Link Compatible  
 Digital Flow Switch **PFMC7-L Series**

How to Order ..... p. 11  
 Specifications ..... p. 12

Flow Range ..... p. 13  
 Analog Output ..... p. 13  
 Pressure Loss ..... p. 13  
 IN Side Straight Piping Length and Accuracy ..... p. 13  
 Internal Circuits and Wiring Examples ..... p. 14  
 Construction: Parts in Contact with Fluid ..... p. 16  
 Dimensions ..... p. 17

**3-Screen Display** Digital Flow Monitor **PFG300 Series**

How to Order ..... p. 18  
 Specifications ..... p. 19  
 Internal Circuits and Wiring Examples ..... p. 20  
 Dimensions ..... p. 21

**PFMC7(-L)/Function Details** ..... p. 24  
**PFG300/Function Details** ..... p. 26  
 Safety Instructions ..... Back cover

PFMC7

PFMC7-L

PFG300

Function  
Details

## 3-Color Display

# Digital Flow Switch

# PFMC7 Series



The PFMC7 series is to be discontinued as of October 2021.  
Please consider ordering the new PF2MC7 series as a substitute.  
See [here](#) for details.

## How to Order



PFMC 7 **501** - **04** - **A** - **M**

### Rated flow range

<b>501</b>	5 to 500 L/min
<b>102</b>	10 to 1000 L/min
<b>202</b>	20 to 2000 L/min

### Thread type

Nil	Rc
<b>N</b>	NPT
<b>F</b>	G*1

\*1 ISO 228 compliant

### Port size

Symbol	Port size	Rated flow range		
		<b>501</b>	<b>102</b>	<b>202</b>
<b>04</b>	1/2	●	●	—
<b>06</b>	3/4	—	—	●

### Output specification

Symbol	OUT1	OUT2	Applicable monitor unit model
<b>A</b>	NPN	NPN	—
<b>B</b>	PNP	PNP	—
<b>C</b>	NPN	Analog (1 to 5 V)	PF300 series
<b>D</b>	NPN	Analog (4 to 20 mA)	PF310 series
<b>E</b> *2	PNP	Analog (1 to 5 V)	PF300 series
<b>F</b> *2	PNP	Analog (4 to 20 mA)	PF310 series
<b>G</b> *2	NPN	External input*3	—
<b>H</b> *2	PNP	External input*3	—

\*2 Made to order


\*3 Can be selected from accumulated value external reset or peak/bottom value reset

### Calibration certificate

Nil	None
<b>A</b> *8	Yes

\*8 Made to order  
The certificate is in both English and Japanese.

### Option 2

Nil	No bracket
<b>R</b>	With bracket*7 

\*7 Options are shipped together with the product but do not come assembled.


### Unit specification

Nil	Units selection function*5
<b>M</b>	SI units only*6

\*5 This product is for overseas use only. (The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)

\*6 Fixed units: Instantaneous flow: L/min, Accumulated flow: L

### Option 1

Nil	With lead wire with M8 connector (3 m)*4 
<b>N</b>	Without lead wire with M8 connector

\*4 Options are shipped together with the product but do not come assembled.

## Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
<b>ZS-40-A</b>	Lead wire with M8 connector	Length: 3 m
<b>ZS-42-A</b>	Bracket	Mounting screw for PFMC7501/7102 (M3 x 5, 2 pcs.)
<b>ZS-42-B</b>	Bracket	Mounting screw for PFMC7202 (M3 x 5, 2 pcs.)



For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

## Specifications

Model		PFMC7501	PFMC7102	PFMC7202	
Fluid	Applicable fluid	Dry air, N <sub>2</sub> (Air quality grade is JIS B 8392-1 1.1.2 to 1.6.2, ISO 8573-1 1.1.2 to 1.6.2.)			
	Fluid temperature range	0 to 50°C			
Flow	Detection method	Thermal type			
	Rated flow range	5 to 500 L/min	10 to 1000 L/min	20 to 2000 L/min	
	Set point range	Instantaneous flow	5 to 525 L/min	10 to 1050 L/min	20 to 2100 L/min
		Accumulated flow	0 to 999,999,990 L		
	Smallest settable increment	Instantaneous flow	1 L/min		
		Accumulated flow	10 L		
	Accumulated volume per pulse (Pulse width = 50 ms)	1 L/pulse	10 L/pulse		
Accumulated value hold function *1	Intervals of 2 or 5 minutes can be selected.				
Pressure	Rated pressure range	0 to 0.8 MPa			
	Proof pressure	1.2 MPa			
	Pressure loss	Refer to the "Pressure Loss" graph.			
	Pressure characteristics *2	±5% F.S. (0 to 0.8 MPa, 0.6 MPa standard)			
Electrical	Power supply voltage	12 to 24 VDC ±10% Ripple (p-p) 10% or less			
	Current consumption	55 mA or less			
	Protection	Polarity protection			
Accuracy	Display accuracy	±3% F.S.			
	Analog output accuracy	±3% F.S.			
	Repeatability	±1% F.S. (±2% F.S. when the response time is set to 0.05 s)			
	Temperature characteristics	±5% F.S. (0 to 50°C, 25°C standard)			
Switch output	Output type	NPN open collector PNP open collector			
	Output mode	Select from Hysteresis, Window comparator, Accumulated output, or Accumulated pulse output modes.			
	Switch operation	Select from Normal or Reversed output.			
	Max. load current	80 mA			
	Max. applied voltage (NPN only)	28 VDC			
	Internal voltage drop (Residual voltage)	NPN output type: 1 V or less (at load current of 80 mA) PNP output type: 1.5 V or less (at load current of 80 mA)			
	Response time *3	Select from 0.05 s, 0.1 s, 0.5 s, 1 s, or 2 s.			
	Hysteresis *4	Variable from 0			
Analog output *5	Protection	Short circuit protection			
	Output type	Voltage output: 1 to 5 V, Current output: 4 to 20 mA Output impedance: Approx. 1 kΩ			
	Impedance	Voltage output	Maximum load impedance at power supply voltage of 24 V: 600 Ω, at power supply voltage of 12 V: 300 Ω		
		Current output	Minimum load impedance: 50 Ω		
	Response time *6	Linked to the response time of the switch output			
External input *7	External input	Input voltage: 0.4 V or less (Reed or Solid state) for 30 ms or longer			
	Input mode	Accumulated value external reset, Peak/Bottom value reset			
Display	Reference condition *8	Select from Standard conditions or Normal conditions.			
	Unit *9	Instantaneous flow	L/min, cfm (ft <sup>3</sup> /min)		
		Accumulated flow	L, ft <sup>3</sup>		
	Display range	Instantaneous flow	-25 to 525 L/min (Displays [0] when value is within the -4 to 4 L/min range)	-50 to 1050 L/min (Displays [0] when value is within the -9 to 9 L/min range)	-100 to 2100 L/min (Displays [0] when value is within the -19 to 19 L/min range)
		Accumulated flow *10	0 to 999,999,999 L		
	Minimum display unit	Instantaneous flow	1 L/min		
		Accumulated flow	10 L		
Display	LCD, 2-screen display (Main screen/Sub screen) Main screen: Red/Green, Sub screen: White Main screen: 4 digits, 7 segments, Sub screen: 6 digits, 11 segments				
Indicator LED	LED ON when switch output is ON (OUT1/OUT2: Orange)				
Environmental resistance	Enclosure	IP65			
	Withstand voltage	250 VAC for 1 min between terminals and housing			
	Insulation resistance	2 MΩ or more (50 VDC measured via megohmmeter) between terminals and housing			
	Operating temperature range	Operating: 0 to 50°C, Stored: -10 to 60°C (No condensation or freezing)			
Operating humidity range	Operating/Stored: 35 to 85% RH (No condensation or freezing)				
Standards	CE marking (EMC Directive, RoHS Directive), UL (CSA)				
Piping specification	Rc1/2, NPT1/2, G1/2		Rc3/4, NPT3/4, G3/4		
Materials of parts in contact with fluid	Stainless steel 304, PPS, Aluminum alloy, HNBR, Si, Au, GE4F				
Weight	Piping specification	Rc thread NPT thread	160 g	240 g	
		G thread	170 g	245 g	
	Lead wire	+80 g			
	Bracket	+25 g		+30 g	

\*1 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 1 million times. If the product is operated 24 hours per day, the product life will be as follows:  
 • 5 min interval: life is calculated as 5 min x 1 million = 5 million min = 9.5 years  
 • 2 min interval: life is calculated as 2 min x 1 million = 2 million min = 3.8 years  
 If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.  
 \*2 Do not release the OUT side piping part of the product directly to the atmosphere without connecting piping. If the product is used with the piping port released to atmosphere, accuracy may vary.  
 \*3 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the switch output turns ON (or OFF) when set to be 90% of the rated flow rate  
 \*4 If the flow fluctuates around the set value, be sure to keep a sufficient margin.

Otherwise, chattering will occur.  
 \*5 Setting is only possible for models with analog output.  
 \*6 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analog output reaches 90% of the rated flow rate  
 \*7 Setting is only possible for models with external input.  
 \*8 The flow rate given in the specifications is the value under standard conditions.  
 \*9 Setting is only possible for models with the units selection function.  
 \*10 The accumulated flow display is the upper 3-digit and lower 6-digit (total of 9 digits) display. The position of the dots on the upper part of the screen indicates which digits are displayed.  
 \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

The PFMC7 series is to be discontinued as of October 2021. Please consider ordering the new PF2MC7 series as a substitute. See [here](#) for details.

### How to Order



**PFMC 7 501 - 04 - L Q - M**

#### Type

7	Integrated display
---	--------------------

#### Rated flow range

501	5 to 500 L/min
102	10 to 1000 L/min
202	20 to 2000 L/min

#### Thread type

Nil	Rc
N	NPT
F	G*1

\*1 ISO 228 compliant

#### Port size

Symbol	Port size	Rated flow range		
		501	102	202
04	1/2	●	●	—
06	3/4	—	—	●

#### Output specification

Symbol	OUT1	OUT2*2	Applicable monitor unit model
L	IO-Link/ Switch output (N/P)	—	—
L2	IO-Link/ Switch output (N/P)	Switch output (N/P) ⇔ External input*4	—
L3	IO-Link/ Switch output (N/P)	Analog voltage output*3	PFG300 series
L4	IO-Link/ Switch output (N/P)	Analog current output	PFG310 series

\*2 Switch output (analog output) or external input can be selected by pressing the buttons. Switch output (analog output) is set as default setting. Output symbol "L" cannot be used as the OUT2 terminal is not connected.

\*3 1 to 5 V or 0 to 10 V can be selected by pressing the button. The default setting is 1 to 5 V.

\*4 Can be selected from accumulated value external reset or peak/bottom value reset

#### Calibration certificate

Nil	None
A*9	Yes

\*9 Made to order

The certificate is in both English and Japanese.

#### Option 2

Nil	No bracket
R	With bracket*8

\*8 Options are shipped together with the product but do not come assembled.

#### Unit specification

Nil	Units selection function*6
M	SI units only*7

\*6 This product is for overseas use only. (The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)

\*7 Fixed units: Instantaneous flow: L/min, Accumulated flow: L

#### Option 1

Nil	With lead wire with M8 connector (3 m)*5
N	None
Q	With M12-M8 conversion lead wire (0.1 m)*5

\*5 Options are shipped together with the product but do not come assembled.

#### Options/Part Nos.


When only optional parts are required, order with the part numbers listed below.

Part no.	Description	Note
ZS-40-A	Lead wire with M8 connector	Length: 3 m
ZS-42-A	Bracket	Mounting screw for PFMC7501/7102(-L) (M3 x 5, 2 pcs.)
ZS-42-B	Bracket	Mounting screw for PFMC7202(-L) (M3 x 5, 2 pcs.)
ZS-40-M12M8-A	M12-M8 conversion lead wire	Length: 0.1 m


#### ZS-40-M12M8-A

##### M12-M8 conversion lead wire

\* The lead wire with an M8 connector and the M12-M8 conversion lead wire are interchangeable with those for the existing PFMC series.



M8 connector

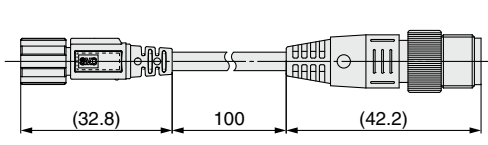

M12 connector

M8 (Female) M12 (Male)

①	Brown	①
②	White	②
③	Blue	③
④	Black	④

Wiring diagram

\* For wiring, refer to the Operation Manual on the SMC website, <https://www.smcworld.com>

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

## Specifications

Model			PFMC7-L
Electrical	Power supply voltage	When used as a switch output device	12 to 24 VDC ±10%
		When used as an IO-Link device	18 to 30 VDC ±10%
Switch output	Output type		Select from NPN or PNP open collector output.
	Output mode		Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.
	Max. applied voltage		30 V (NPN output)
	Internal voltage drop (Residual voltage)		1.5 V or less (at load current of 80 mA)
	Delay time*1		3.4 ms or less Variable from 0 to 60 s/0.01 s increments
Analog output	Response time*2		Linked to the set value of the digital filter
	Output type		Voltage output: 1 to 5 V (0 to 10 V can be selected, only when the power supply voltage is 24 VDC)*3, Current output: 4 to 20 mA
	Impedance	Voltage output	Output impedance: Approx. 1 kΩ
		Current output	Maximum load impedance: 600 Ω at power supply voltage of 24 V, 300 Ω at power supply voltage of 12 V
Display	Display		2-screen display (Main screen, Sub screen) Main screen: 4-digit, 7-segment, 2-color, Red/Green; Sub screen: 9-digit, 11-segment (Only the 5th digit is a 7-segment LED.), White Display values updated 5 times per second
Digital filter*4			Select from 0.05 s, 0.1 s, 0.5 s, 1.0 s, 2.0 s, or 5.0 s.
Standards			CE marking (EMC Directive, RoHS Directive)

- \*1 The time from when the instantaneous flow reaches the set value to when the switch output operates can be set.
- \*2 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analog output reaches 90% of the rated flow rate
- \*3 When selecting 0 to 10 V, refer to the analog output graph for the allowable load current.
- \*4 The time for the digital filter can be set to the sensor input. The response time indicates when the set value is 90% in relation to the step input.

### Communication Specifications (IO-Link mode)

IO-Link type	Device
IO-Link version	V 1.1
Communication speed	COM2 (38.4 kbps)
Configuration file	IODD file*1
Minimum cycle time	3.4 ms
Process data length	Input data: 4 bytes, Output data: 0 byte
On request data communication	Yes
Data storage function	Yes
Event function	Yes
Vendor ID	131 (0 x 0083)
Device ID*2	PFMC7501-□□-L□-□□□ : 541 (0 x 021D)
	PFMC7501-□□-L2□-□□□ : 542 (0 x 021E)
	PFMC7501-□□-L3□-□□□ : 543 (0 x 021F)
	PFMC7501-□□-L4□-□□□ : 544 (0 x 0220)
	PFMC7102-□□-L□-□□□ : 545 (0 x 0221)
	PFMC7102-□□-L2□-□□□ : 546 (0 x 0222)
	PFMC7102-□□-L3□-□□□ : 547 (0 x 0223)
	PFMC7102-□□-L4□-□□□ : 548 (0 x 0224)
	PFMC7202-□□-L□-□□□ : 549 (0 x 0225)
	PFMC7202-□□-L2□-□□□ : 550 (0 x 0226)
	PFMC7202-□□-L3□-□□□ : 551 (0 x 0227)
	PFMC7202-□□-L4□-□□□ : 552 (0 x 0228)

- \*1 The configuration file can be downloaded from the SMC website, <https://www.smcworld.com>
- \*2 The device ID differs according to each product type (output specification).

Other specifications that are not listed are the same as those of the standard product. For details, refer to page 10.

PFMC7

PFMC7-L

PFG300

Function Details



# PFMC7(-L) Series

## Flow Range

Model	Flow range					
	-100 L/min	0 L/min	200 L/min	500 L/min	1000 L/min	2000 L/min
PFMC7501(-L)		5 L/min	500 L/min			
		5 L/min	525 L/min			
		-25 L/min	525 L/min			
PFMC7102(-L)		10 L/min	1000 L/min			
		10 L/min	1050 L/min			
		-50 L/min	1050 L/min			
PFMC7202(-L)		20 L/min	2000 L/min			
		20 L/min	2100 L/min			
		-100 L/min	2100 L/min			

Rated flow range  
  Set point range  
  Display range

## Analog Output


### Flow/Analog Output

	0 L/min	A*2	B
Voltage output (1 to 5 V)*1	1 V	1.04 V	5 V
Current output*1	4 mA	4.16 mA	20 mA


	0 L/min	C*2	D
Voltage output (0 to 10 V)*1,3	0 V	0.1 V	10 V

- \*1 Analog output accuracy is within  $\pm 3\%$  F.S.
- \*2 A and C will change according to the setting of the zero cut function.
- \*3 The analog output current from the connected equipment should be  $20 \mu\text{A}$  or less when selecting 0 to 10 V. When more than  $20 \mu\text{A}$  current flows, it is possible that the accuracy is not satisfied below 0.5 V.
- \* The minimum value of the rated flow range will change according to the setting of the zero cut function.

Model	Min. value of the rated flow range	Max. value of the rated flow range
PFMC7501(-L)	5 L/min	500 L/min
PFMC7102(-L)	10 L/min	1000 L/min
PFMC7202(-L)	20 L/min	2000 L/min

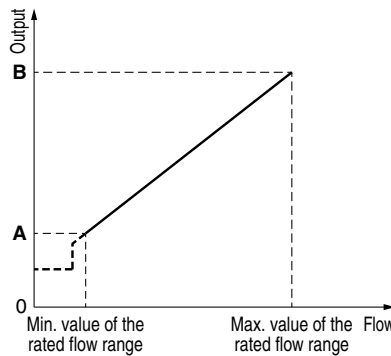


Voltage output (1 to 5 V)  
Current output (4 to 20 mA)

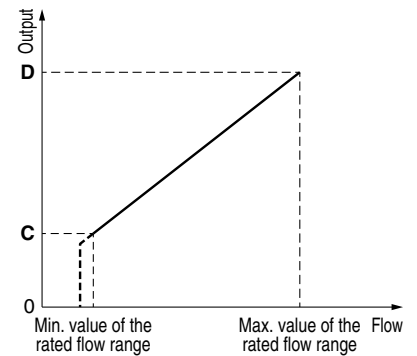


Voltage output (0 to 10 V)  
\* PFMC7-L only

## Pressure Loss (Reference Data)


### PFMC7501(-L) (for 500 L/min)

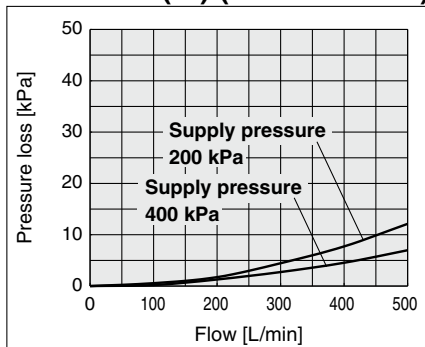

### PFMC7102(-L) (for 1000 L/min)


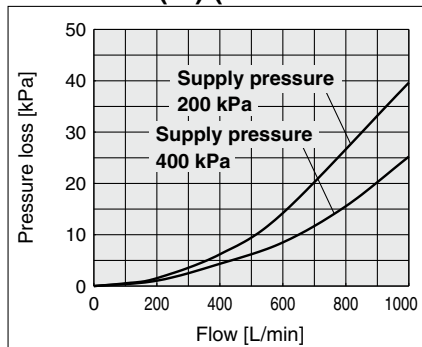


### PFMC7202(-L) (for 2000 L/min)

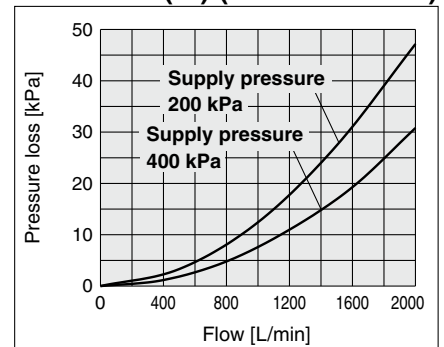

## IN Side Straight Piping Length and Accuracy (Reference Data)


- The piping on the IN side must have a straight section of piping with a length of 8 cm or more. If a straight section of piping is not installed, the accuracy can vary by approximately  $\pm 2\%$  F.S.
- \* "Straight section" means a part of the piping without any bends or rapid changes in the cross sectional area.
- When the PFMC7501 or 7102 is connected to tubing, use a tube I.D. 9 mm or more just before the product. The accuracy can vary by approximately  $\pm 2\%$  F.S. when such tubing is not used.

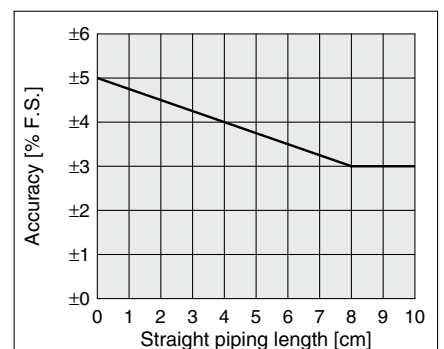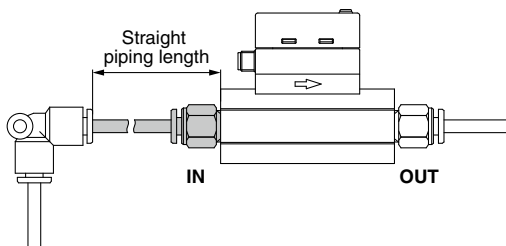

**Internal Circuits and Wiring Examples**

**NPN (2 outputs) type**


PFMC7□□□-□□-**A**□-□□□

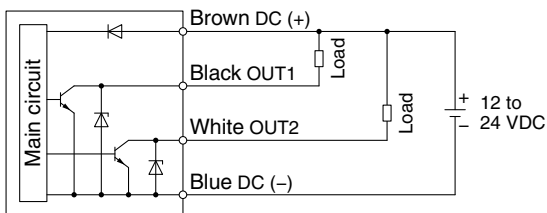

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less

**PNP (2 outputs) type**

PFMC7□□□-□□-**B**□-□□□

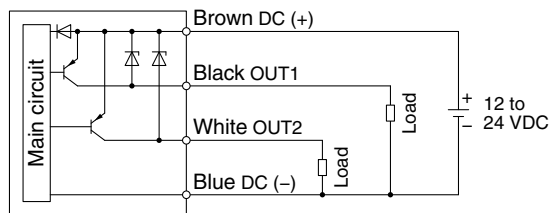


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

**NPN (1 output) + Analog (1 to 5 V) output type**

PFMC7□□□-□□-**C**□-□□□

**NPN (1 output) + Analog (4 to 20 mA) output type**

PFMC7□□□-□□-**D**□-□□□

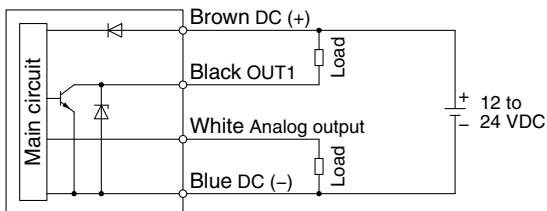

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less

C: Analog output: 1 to 5 V

Output impedance: 1 kΩ

D: Analog output: 4 to 20 mA

Max. load impedance: 600 Ω


Min. load impedance: 50 Ω

**PNP (1 output) + Analog (1 to 5 V) output type**

PFMC7□□□-□□-**E**□-□□□

**PNP (1 output) + Analog (4 to 20 mA) output type**

PFMC7□□□-□□-**F**□-□□□

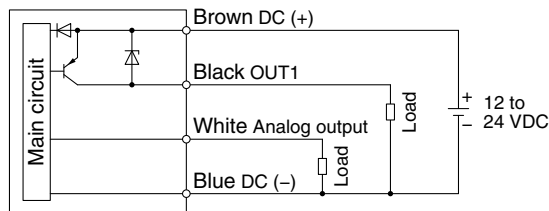

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

E: Analog output: 1 to 5 V

Output impedance: 1 kΩ


F: Analog output: 4 to 20 mA

Max. load impedance: 600 Ω

Min. load impedance: 50 Ω

**NPN (1 output) + External input type**

PFMC7□□□-□□-**G**□-□□□

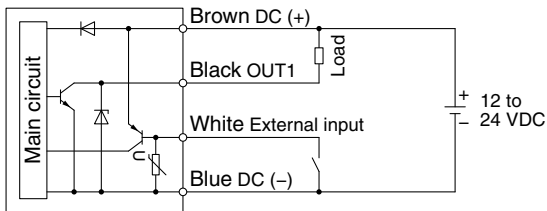


Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less

External input: Input voltage 0.4 V or less (Reed or Solid state input) for 30 ms or longer

**PNP (1 output) + External input type**

PFMC7□□□-□□-**H**□-□□□

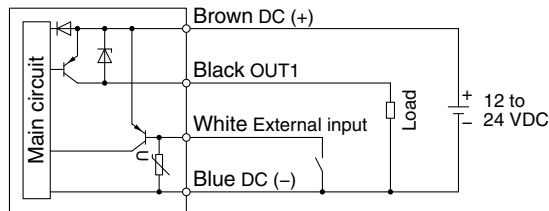

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

External input: Input voltage 0.4 V or less (Reed or Solid state input) for 30 ms or longer

**Accumulated pulse output wiring examples**

**NPN (2 outputs) type**

PFMC7□□□-□□-**A**□-□□□



**NPN (1 output) + Analog output type**

PFMC7□□□-□□-**C**□-□□□

PFMC7□□□-□□-**D**□-□□□

**NPN (1 output) + External input type**

PFMC7□□□-□□-**G**□-□□□

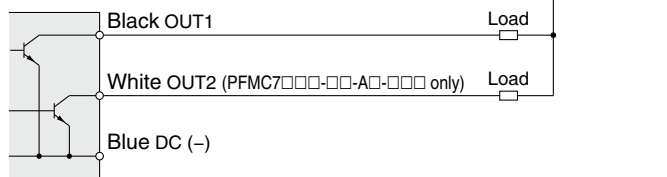

**PNP (2 outputs) type**

PFMC7□□□-□□-**B**□-□□□



**PNP (1 output) + Analog output type**

PFMC7□□□-□□-**E**□-□□□

PFMC7□□□-□□-**F**□-□□□

**PNP (1 output) + External input type**

PFMC7□□□-□□-**H**□-□□□

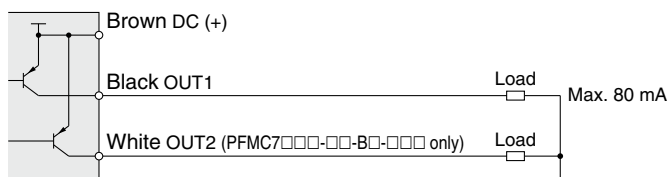


PFMC7  
PFMC7-L  
PFG300  
Function Details

# PFMC7(-L) Series

## Internal Circuits and Wiring Examples


### PFMC7□-□□-L□-□□

#### NPN output type

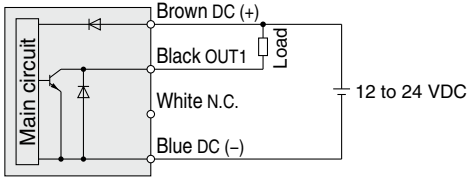

Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


#### PNP output type

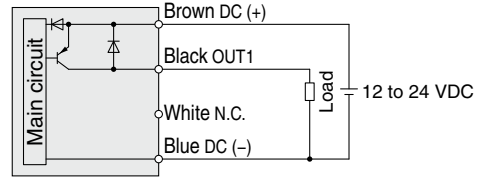

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


### PFMC7□-□□-L2□-□□

#### NPN 2 output type

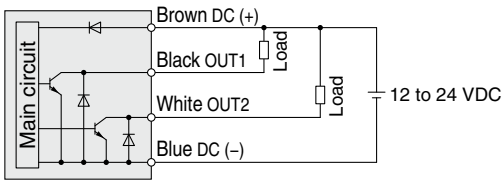

Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


#### PNP 2 output type

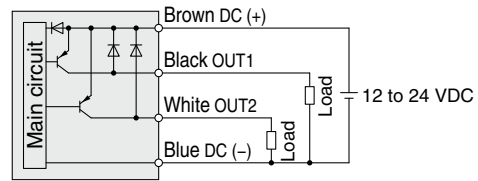

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less


### PFMC7□-□□-L3/L4□-□□

#### NPN + Analog output selected

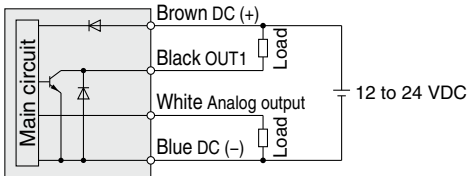

Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less  
 L3: Analog output: 1 to 5 V or 0 to 10 V  
 Output impedance: 1 kΩ  
 L4: Analog output: 4 to 20 mA  
 Max. load impedance: 600 Ω  
 Min. load impedance: 50 Ω


#### PNP + Analog output selected

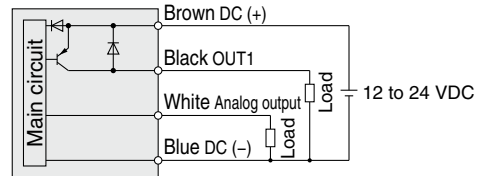

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less  
 L3: Analog output: 1 to 5 V or 0 to 10 V  
 Output impedance: 1 kΩ  
 L4: Analog output: 4 to 20 mA  
 Max. load impedance: 600 Ω  
 Min. load impedance: 50 Ω


### PFMC7□-□□-L2□-□□

#### NPN + External input selected

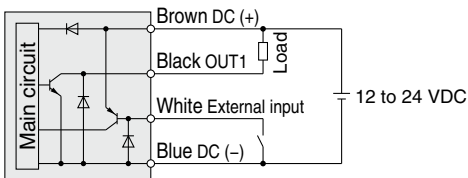


Max. applied voltage: 30 V, Max. load current: 80 mA, Internal voltage drop: 1.5 V or less  
 External input voltage: 0.4 V or less (Reed or Solid state input) for 30 ms or longer

#### PNP + External input selected

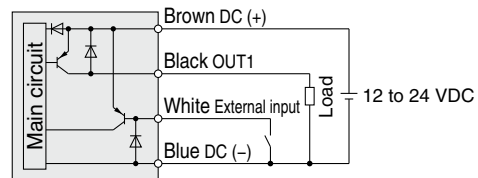


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less  
 External input voltage: 0.4 V or less (Reed or Solid state input) for 30 ms or longer

### When used as an IO-Link device

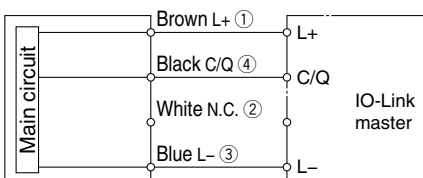

\* The numbers in the diagrams show the connector pin layout.

**Construction: Parts in Contact with Fluid**

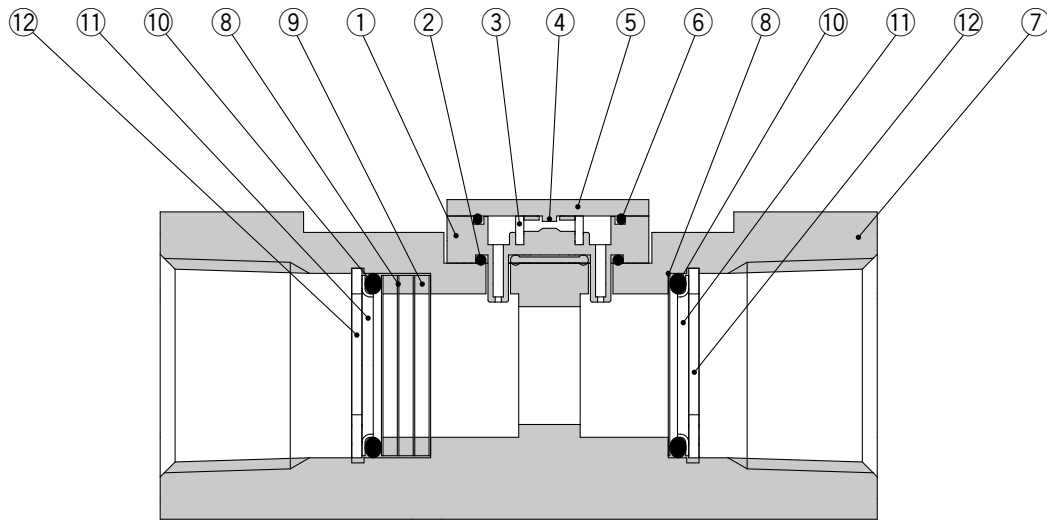

**Component Parts**

No.	Description	Material	Note
1	Sensor body	PPS	
2	Gasket	HNBR	
3	Flow rectifier	Stainless steel 304	
4	Sensor chip	Silicon	
5	Printed circuit board	GE4F	
6	Gasket	HNBR	
7	Body	Aluminum alloy	Anodized
8	Mesh	Stainless steel 304	
9	Spacer	PPS	
10	O-ring	HNBR	
11	Holder	Stainless steel 304	
12	C retaining ring	Stainless steel 304	

PFMC7

PFMC7-L


PFG300

Function  
Details

# PFMC7(-L) Series

## Dimensions


### PFMC7501/7102/7202(-L)

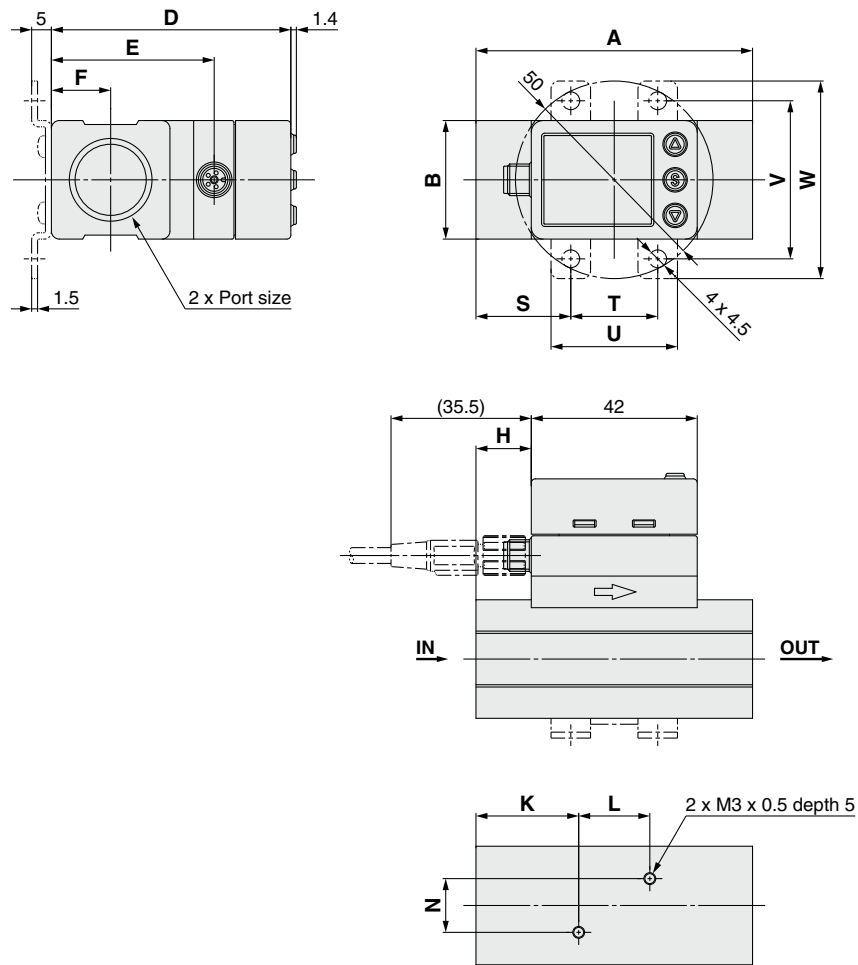

Model	Symbol	Port size	A	B	D	E	F	H	K	L	N
PFMC7501/7102(-L)		Rc1/2, NPT1/2	70	30	60.6	41.2	15	14	26	18	13.6
PFMC7202(-L)		Rc3/4, NPT3/4, G3/4	90	35	66.1	46.7	17.5	24	31	28	16.8
PFMC7501/7102(-L)		G1/2	76	30	60.6	41.2	15	14	26	18	13.6

Model	Symbol	Bracket dimensions				
		S	T	U	V	W
PFMC7501/7102(-L)		24	22	32	40	50
PFMC7202(-L)		30	30	42	48	58

### Lead wire with M8 connector (Part no.: ZS-40-A)

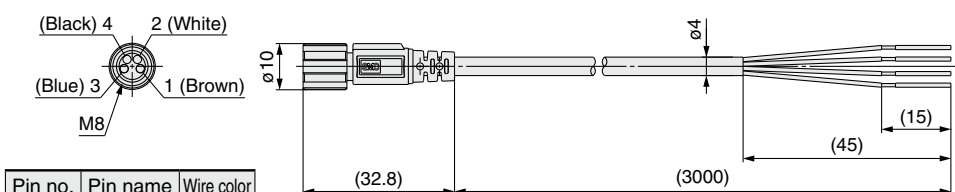

Pin no.	Pin name	Wire color
1	DC (+)	Brown
2	OUT2	White
3	DC (-)	Blue
4	OUT1	Black

\* 4-wire type lead wire with M8 connector used for the PFMC7(-L) series  
 \* For wiring, refer to the "Operation Manual" on the SMC website,  
<https://www.smcworld.com>

### Cable Specifications

Conductor	Nominal cross section	AWG23
	Outside diameter	Approx. 0.7 mm
Insulator	Material	Heat-resistant PVC
	Outside diameter	Approx. 1.1 mm
	Color	Brown, White, Black, Blue
Sheath	Material	Heat- and oil-resistant PVC
Finished outside diameter		$\phi 4$



# 3-Screen Display

# Digital Flow Monitor

# PFG300 Series



## How to Order

**PFG 3 0 0 - RT - M - L**

### Type

<b>3</b>	Remote type monitor unit
----------	--------------------------

### Input specification

Symbol	Description	Applicable flow switch model
<b>0</b>	Voltage input	PFMC7□-C/E/L3 series
<b>1</b>	Current input	PFMC7□-D/F/L4 series

\* The PFG3 (monitor unit) cannot be used as an IO-Link communication device.

### Output specification

<b>RT</b>	2 outputs (NPN/PNP switching type) + Analog voltage output*1, 2
<b>SV</b>	2 outputs (NPN/PNP switching type) + Analog current output*2
<b>XY</b>	2 outputs (NPN/PNP switching type) + Copy function

\*1 Can switch between 1 to 5 V and 0 to 10 V

\*2 Can be switched to external input or copy function

### Unit specification

<b>Nil</b>	Units selection function*3
<b>M</b>	SI units only*4


\*3 This product is for overseas use only. (The SI unit type is provided for use in Japan in accordance with the New Measurement Act.)

\*4 Fixed units: Instantaneous flow: L/min  
Accumulated flow: L


### Option 4

	Operation manual	Calibration certificate
<b>Nil</b>	<input type="radio"/>	<input type="checkbox"/>
<b>Y</b>	<input type="checkbox"/>	<input type="checkbox"/>
<b>K</b>	<input type="radio"/>	<input type="radio"/>
<b>T</b>	<input type="checkbox"/>	<input type="radio"/>





### Option 3

<b>Nil</b>	None
<b>C</b>	ZS-28-CA-4 

### Option 1

Symbol	Description
<b>Nil</b>	Without lead wire
<b>L</b>	Power supply/output connection lead wire (Lead wire length: 2 m) 

### Option 2


Symbol	Description
<b>Nil</b>	None
<b>A1</b>	Bracket A (Vertical mounting) 
<b>A2</b>	Bracket B (Horizontal mounting) 
<b>B</b>	Panel mount adapter 
<b>D</b>	Panel mount adapter + Front protection cover 

### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
<b>ZS-28-CA-4</b>	Sensor connector	For PFMC
<b>ZS-46-A1</b>	Bracket A	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
<b>ZS-46-A2</b>	Bracket B	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
<b>ZS-46-B</b>	Panel mount adapter	
<b>ZS-46-D</b>	Panel mount adapter + Front protection cover	
<b>ZS-46-5L</b>	Power supply/output connection lead wire	5-core, 2 m
<b>ZS-27-01</b>	Front protection cover	

### Connection Example

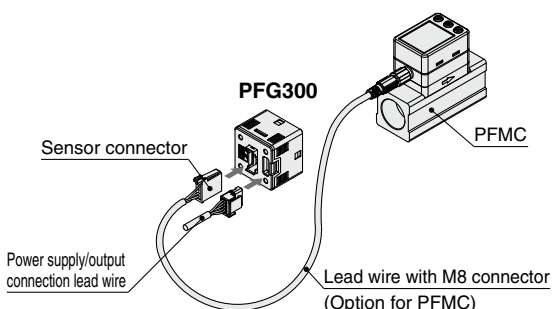

PFMC7

PFMC7-L

PFG300

Function Details

# PFG300 Series

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website.

## Specifications

		PFG300 series			
Applicable SMC flow switch	Model	PFMC7501	PFMC7102	PFMC7202	
	<b>Rated flow range</b> *1	5 to 500 L/min	10 to 1000 L/min	20 to 2000 L/min	
Flow	<b>Set point range</b>	Instantaneous flow	-25 to 525 L/min	-50 to 1050 L/min	
		Accumulated flow	0 to 999,999,999,990 L		
	<b>Smallest settable increment</b>	Instantaneous flow	1 L/min		
		Accumulated flow	10 L		
	<b>Accumulated volume per pulse (Pulse width = 50 ms)</b>	1 L/pulse	10 L/pulse		
	<b>Accumulated value hold function</b> *3	Intervals of 2 or 5 minutes can be selected. The stored accumulated flow is held even when the power supply is OFF.			
Electrical	<b>Power supply voltage</b>	12 to 24 VDC ±10%			
	<b>Current consumption</b>	25 mA or less			
	<b>Protection</b>	Polarity protection			
Accuracy	<b>Display accuracy</b>	±0.5% F.S. ± Minimum display unit (Ambient temperature at 25°C)			
	<b>Analog output accuracy</b>	±0.5% F.S. (Ambient temperature at 25°C)			
	<b>Repeatability</b>	±0.1% F.S. ±1 digit			
	<b>Temperature characteristics</b>	±0.5% F.S. (Ambient temperature: 0 to 50°C, 25°C standard)			
Switch output	<b>Output type</b>	Select from NPN or PNP open collector output.			
	<b>Output mode</b>	Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.			
	<b>Switch operation</b>	Select from Normal or Reversed output.			
	<b>Max. load current</b>	80 mA			
	<b>Max. applied voltage (NPN only)</b>	30 VDC			
	<b>Internal voltage drop (Residual voltage)</b>	NPN output: 1 V or less (at load current of 80 mA), PNP output: 1.5 V or less (at load current of 80 mA)			
	<b>Response time</b> *2	3 ms or less			
	<b>Delay time</b> *2	Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, 30 s, 40 s, 50 s, or 60 s.			
	<b>Hysteresis</b> *4	Variable from 0			
Analog output*5	<b>Protection</b>	Short circuit protection			
	<b>Output type</b>	Voltage output: 1 to 5 V, 0 to 10 V (only when the power supply voltage is 24 VDC) Current output: 4 to 20 mA (0 L/min to maximum value of the rated flow)			
	<b>Impedance</b>	Voltage output	Output impedance: 1 kΩ		
		Current output	Maximum load impedance: 300 Ω (at power supply voltage of 12 V), 600 Ω (at power supply voltage of 24 VDC)		
	<b>Response time</b> *2	50 ms or less			
External input*6	<b>External input</b>	Input voltage: 0.4 V or less (Reed or Solid state) for 30 ms or longer			
	<b>Input mode</b>	Select from Accumulated value external reset or Peak/Bottom value reset.			
Sensor input	<b>Input type</b>	Voltage input: 1 to 5 VDC (Input impedance: 1 MΩ), Current input: 4 to 20 mA DC (Input impedance: 51 Ω) (0 L/min to maximum value of the rated flow)			
	<b>Connection method</b>	Connector (e-CON)			
	<b>Protection</b>	Over voltage protection (Up to 26.4 VDC)			
Display	<b>Display mode</b>	Select from Instantaneous flow or Accumulated flow.			
	<b>Unit</b> *7	Instantaneous flow	L/min, cfm (ft <sup>3</sup> /min)		
		Accumulated flow	L, ft <sup>3</sup> , L x 10 <sup>6</sup> , ft <sup>3</sup> x 10 <sup>6</sup>		
	<b>Display range</b>	Instantaneous flow	-25 to 525 L/min	-50 to 1050 L/min	-100 to 2100 L/min
		Accumulated flow*9	0 to 999,999,999,990 L		
	<b>Minimum display unit</b>	Instantaneous flow	1 L/min		
		Accumulated flow	10 L		
	<b>Display type</b>	LCD			
	<b>Number of displays</b>	3-screen display (Main screen, Sub screen)			
	<b>Display color</b>	1) Main screen: Red/Green, 2) Sub screen: Orange			
<b>Number of display digits</b>	1) Main screen: 5 digits (7 segments), 2) Sub screen: 9 digits (7 segments)				
<b>Indicator LED</b>	LED ON when switch output is ON. OUT1/2: Orange				
Digital filter*8	Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, or 30 s.				
Environmental resistance	<b>Enclosure</b>	IP40			
	<b>Withstand voltage</b>	1000 VAC for 1 min between terminals and housing			
	<b>Insulation resistance</b>	50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing			
	<b>Operating temperature range</b>	Operating: 0 to 50°C, Stored: -10 to 60°C (No condensation or freezing)			
<b>Standards</b>	Operating/Stored: 35 to 85% RH (No condensation or freezing)				
Weight	CE marking (EMC directive/RoHS directive)				
	<b>Body</b>	25 g (Excluding the power supply/output connection lead wire)			
	<b>Lead wire with connector</b>	+39 g			

\*1 Rated flow range of the applicable flow switch

\*2 Value without digital filter (at 0.00 s)

\*3 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 1.5 million times. If the product is operated 24 hours per day, the product life will be as follows:

• 5 min interval: life is calculated as 5 min x 1.5 million = 7.5 million min = 14.3 years

• 2 min interval: life is calculated as 2 min x 1.5 million = 3 million min = 5.7 years

If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.

\*4 If the flow fluctuates around the set value, be sure to keep a sufficient margin. Otherwise, chattering will occur.

\*5 Setting is only possible for models with analog output.

\*6 Setting is only possible for models with external input.

\*7 Setting is only possible for models with the units selection function.


\*8 The response time indicates when the set value is 90% in relation to the step input.

\*9 The accumulated flow display is the upper 6-digit and lower 6-digit (total of 12 digits) display. When the upper digits are displayed, x 10<sup>6</sup> lights up.


\* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

**Internal Circuits and Wiring Examples**


**-XY  
-RT  
-SV  
NPN (2 outputs) + Copy function**

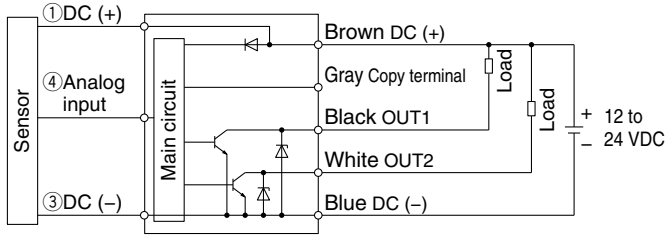


**-XY  
-RT  
-SV  
PNP (2 outputs) + Copy function**

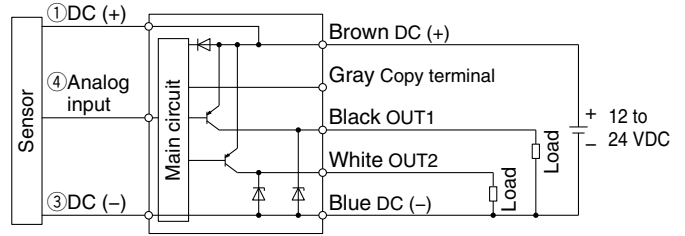


**-RT: NPN (2 outputs) + Analog voltage output  
-SV: NPN (2 outputs) + Analog current output**

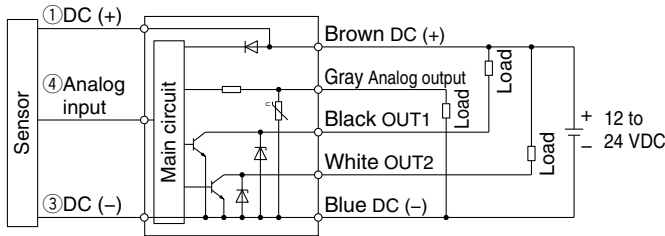


**-RT: PNP (2 outputs) + Analog voltage output  
-SV: PNP (2 outputs) + Analog current output**

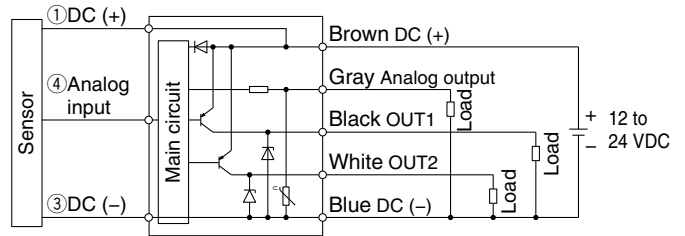

**-RT: NPN (2 outputs) + External input  
-SV: NPN (2 outputs) + External input**

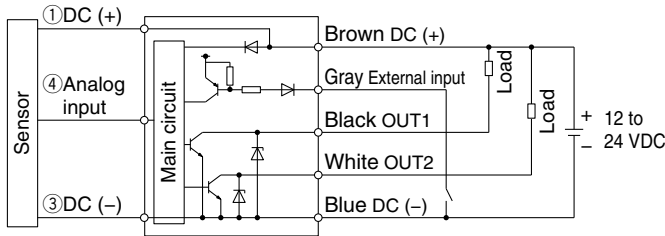


**-RT: PNP (2 outputs) + External input  
-SV: PNP (2 outputs) + External input**



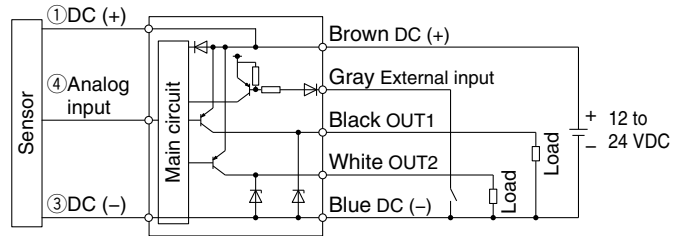


**Accumulated pulse output wiring examples**

**NPN (2 outputs) type**

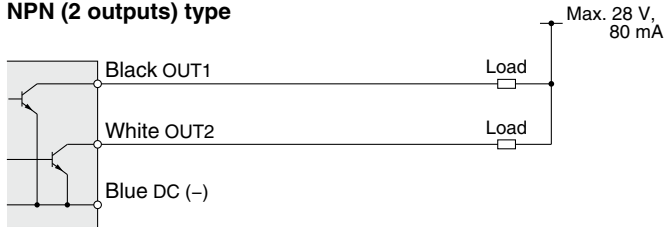

**PNP (2 outputs) type**

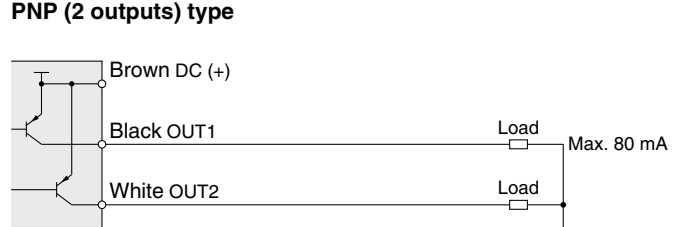

PFG300


PFG300-L

PFG300


Function Details

# PFG300 Series

## Dimensions

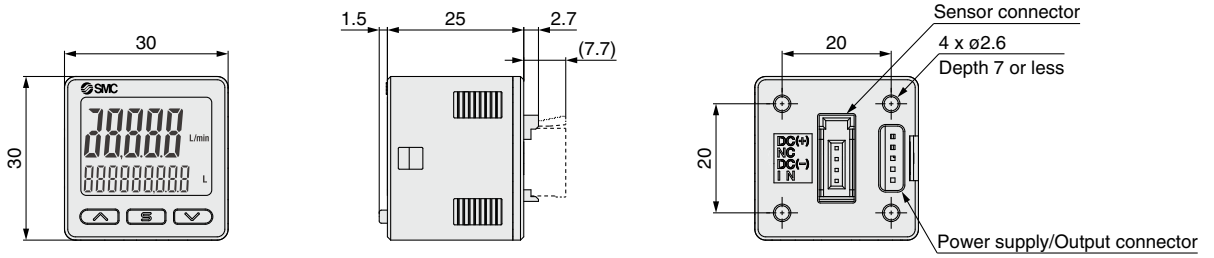


### Bracket A (Part no.: ZS-46-A1)

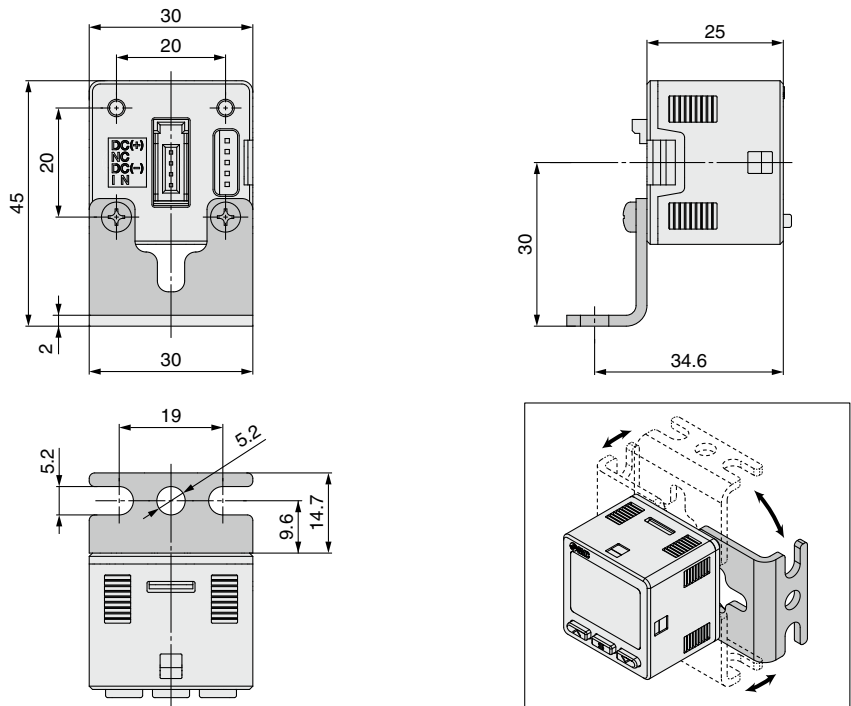

\* Bracket configuration allows for mounting in four orientations.


### Bracket B (Part no.: ZS-46-A2)

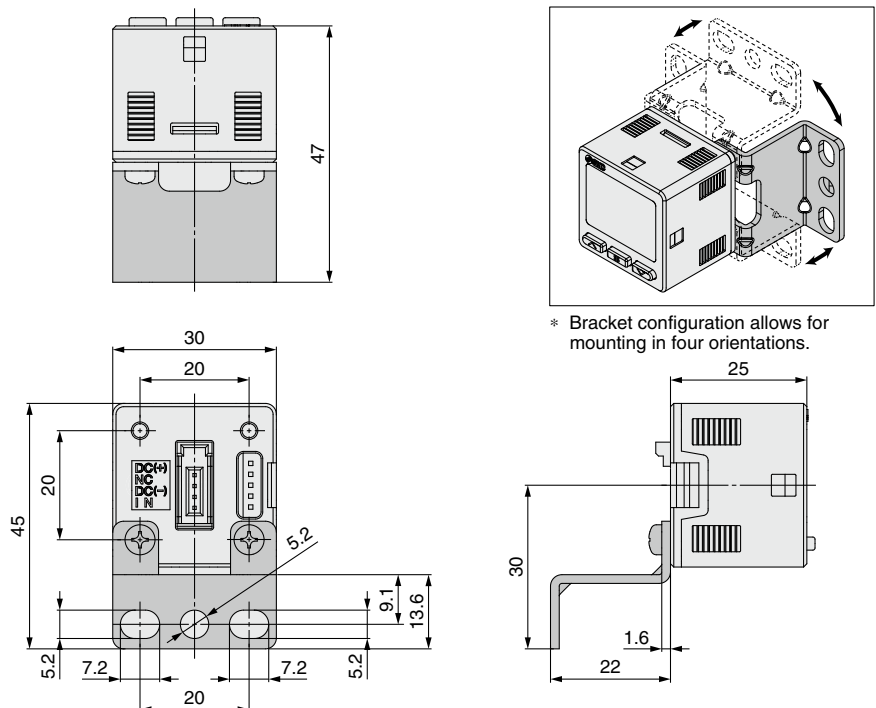


\* Bracket configuration allows for mounting in four orientations.

## Dimensions


### Panel mount adapter (Part no.: ZS-46-B)

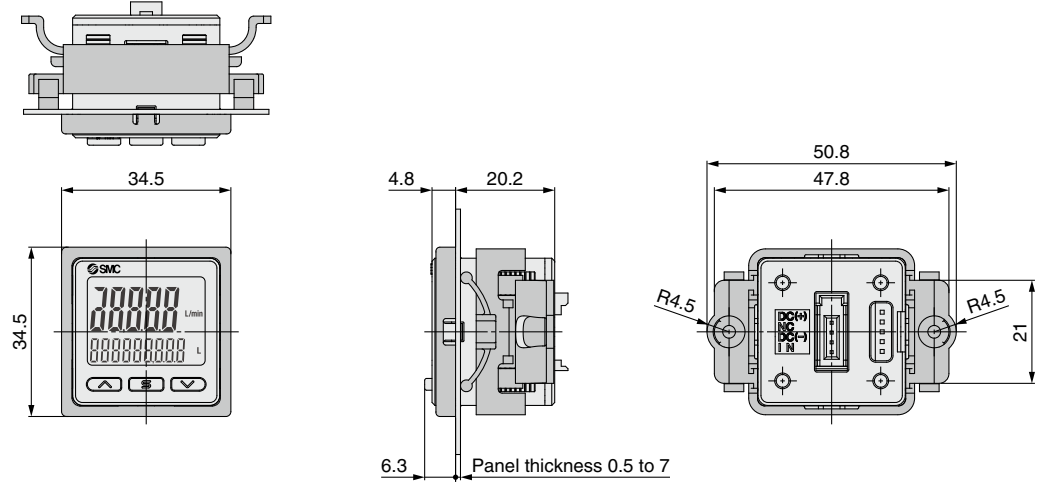

### Panel mount adapter + Front protection cover (Part no.: ZS-46-D)

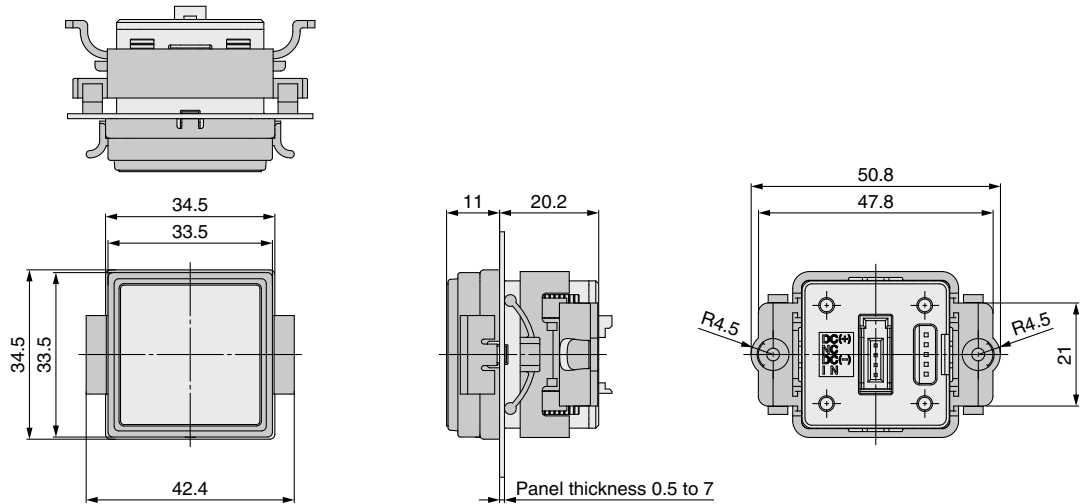


### Power supply/output connection lead wire (Part no.: ZS-46-5L)

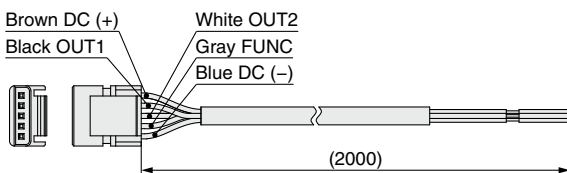

### Sensor connector (Part no.: ZS-28-CA-4)

Pin no.	Terminal
1	DC (+)
2	N.C.
3	DC (-)
4	IN*1

\*1 1 to 5 V or 4 to 20 mA



### Cable Specifications

Conductor cross section	0.15 mm <sup>2</sup> (AWG26)	
Insulator	Outside diameter	1.0 mm
	Color	Brown, Blue, Black, White, Gray (5-core)
Sheath	Finished outside diameter	ø3.5




# PFG300 Series


## Dimensions

### Panel fitting dimensions


#### Individual mounting

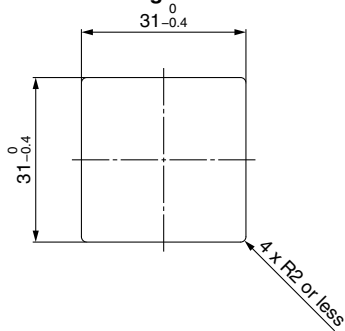


#### Multiple (2 pcs. or more) secure mounting <Horizontal>

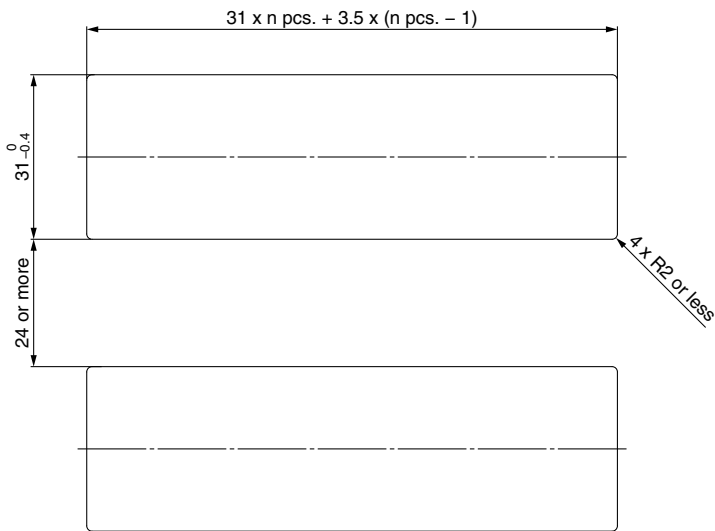


#### Panel mount example <Horizontal>

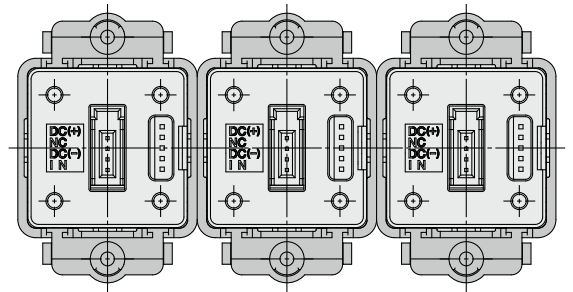

#### <Vertical>

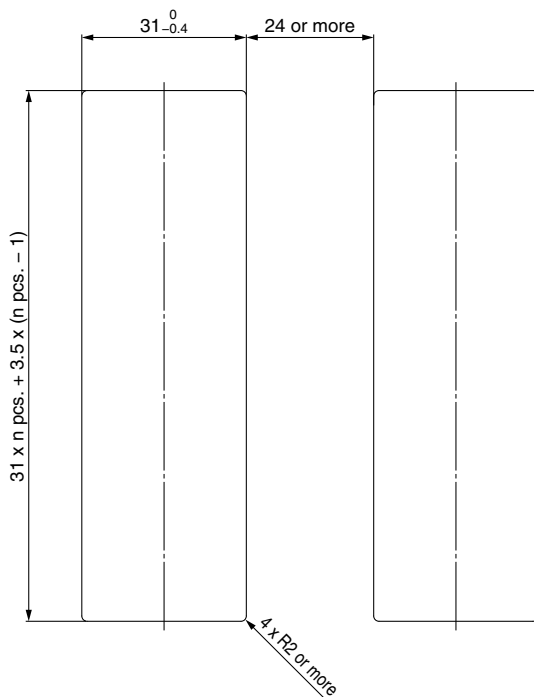

#### Panel mount example <Vertical>

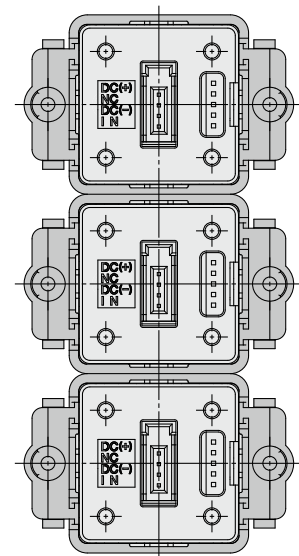

# PFMC7(-L) Series Function Details

## ■ Delay time setting (PFMC7-L series only)

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

The total switching time is the switch operation time and the set delay time.  
(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s

## ■ Output operation

The output operation can be selected from the following:  
Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow, output (accumulated output and pulse output) corresponding to accumulated flow, error output, or output OFF (PFMC7-L series only)

\* At the time of shipment from the factory, it is set to hysteresis mode and normal output.

## ■ Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values. (The display color depends on OUT1 setting.)

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

## ■ Reference condition

The display unit can be selected from standard condition or normal condition.

Standard condition: Flow rate converted to a volume at 20°C and 1 atm (atmosphere)
Normal condition: Flow rate converted to a volume at 0°C and 1 atm (atmosphere)

## ■ Display mode

The display mode can be selected from instantaneous flow or accumulated flow.

Instantaneous flow display
Accumulated flow display

## ■ Response time (Digital filter)

The response time can be selected to suit the application.  
(Default setting : 1 s)

Abnormalities can be detected more quickly by setting the response time to 0.05 seconds.

The effect of fluctuation and flickering of the display can be reduced by setting the response time to 2 seconds.

\* 5 s can only be selected for the PFMC7-L series.

0.05 s
0.1 s
0.5 s
1 s
2 s
5 s

## ■ External input function

This function can be used only when the optional external input is present. The accumulated flow, peak value, and bottom value can be reset remotely.

**Accumulated value external reset:** A function to reset the accumulated flow value when an external input signal is applied.  
In accumulated increment mode, the accumulated value will reset to and increase from zero.  
In accumulated decrement mode, the accumulated value will reset to and decrease from the set value.

\* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory (EEPROM) will be accessed. Take into consideration that the maximum number of times the memory can be accessed is 1 million times. The total number of external inputs and the accumulated value memorizing time interval should not exceed 1 million times.

**Peak/Bottom value reset:** Peak and bottom value are reset.

## ■ Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type, when ON the output will be 5 V or 20 mA, and when OFF, it will be 1 V or 4 mA.

\* Also, an increase or decrease of the flow and temperature will not change the on/off status of the output while the forced output function is activated.

## ■ Accumulated value hold



The accumulated value is not cleared even when the power supply is turned off.

The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The life time of the memory device is 1 million access times. Take this into consideration before using this function.

## ■ Display

The display of the PFMC7 series and that of the PFMC7-L series differs slightly.

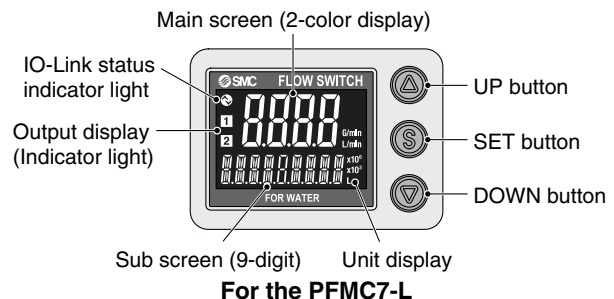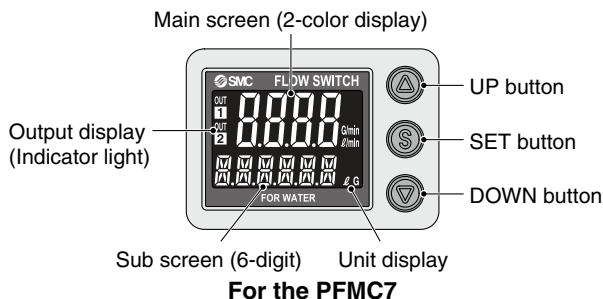

## ■ Display OFF mode

This function will turn the display OFF. In this mode, decimal points flash on the main screen. If any button is pressed during this mode, the display reverts to normal for 30 seconds to allow checking of the flow, etc.

## ■ Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of shipment from the factory, it is set such that a security code is not required.

## ■ Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.



## ■ Key-lock function

Prevents operation errors such as accidentally changing setting values

# PFMC7(-L) Series

## ■ Analog output free range function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed.  
The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.

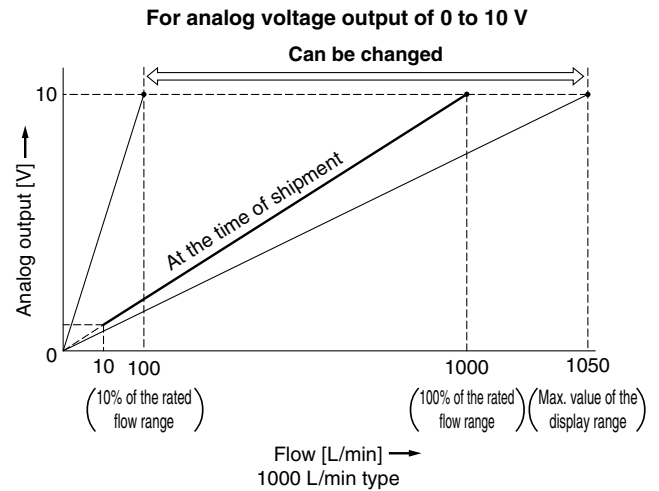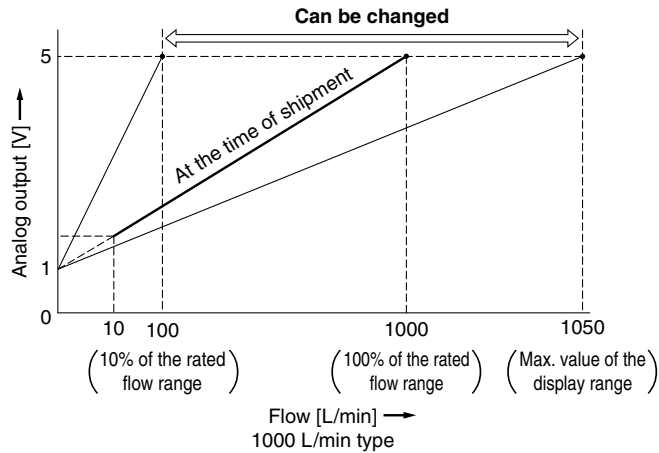

## ■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Error name	Description	Action	Applicable model			
				PFMC7 series	PFMC7-L series		
Er1	OUT1 over current error	A load current of 80 mA or more is applied to the switch output (OUT1).	Eliminate the cause of the over current by turning off the power supply and then turning it on again.	●	●		
Er2	OUT2 over current error	A load current of 80 mA or more is applied to the switch output (OUT2).		●	●		
HHH	Instantaneous flow error	The flow has exceeded the upper limit of the flow display range.	Decrease the flow rate.	●	●		
LLL	Reverse flow error	There is a reverse flow equivalent to -5% or more.	Change the flow to the correct direction.	●	●		
9999999999 (Alternately displays [999] and [999999])	Accumulated flow error	The accumulated flow has exceeded the accumulated flow range.	Reset the accumulated flow.	●	—		
999999 (Flashing) x 10 <sup>6</sup>	Accumulated flow error	The accumulated flow has exceeded the accumulated flow range.	Reset the accumulated flow.	—	●		
Er0 Er4 Er6 Er8	System error	An internal data error has occurred.	Turn the power OFF and turn it ON again.	●	●		
Er16 Er40				—	●		
Er3				Outside of zero-clear range	During zero-clear operation, the flow rate of ±5% F.S. or more is applied. (The mode is returned to measurement mode after 1 second.)	—	●
Er15				Version does not match	The IO-Link version does not match that of the master.	—	●

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.

# PFG300 Series

## Function Details

### Output operation

The output operation can be selected from the following:  
Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow or output (accumulated output and pulse output) corresponding to accumulated flow.

(Default setting: Hysteresis mode, Normal output)

### Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. Output mode, output type, display color, and accumulate pulse output cannot be changed.

### Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values.

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

### Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s

### Digital filter setting

The time for the digital filter can be set to the sensor input. Setting the digital filter can reduce chattering of the switch output and flickering of the analog output and the display.

The response time indicates when the set value is 90% in relation to the step input.

(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s

### FUNC output switching function

Analog output, external input, or copy function can be selected.  
(Default setting: Analog output)

### Selectable analog output function

1 to 5 V or 0 to 10 V can be selected for the analog voltage output type.  
(Default setting: 1 to 5 V)

### External input function

The accumulated flow, peak value, and bottom value can be reset remotely.

**Accumulated value external reset:** A function to reset the accumulated flow value when an external input signal is applied.

In accumulated increment mode, the accumulated value will reset to and increase from zero.

In accumulated decrement mode, the accumulated value will reset to and decrease from the set value.

\* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory will be accessed. Take into consideration that the maximum number of times the memory can be accessed is 1.5 million times. The total number of external inputs and the accumulated value memorizing time interval should not exceed 1.5 million times.

**Peak/Bottom value reset:** Peak and bottom value are reset.

### Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type: When ON, the output will be 5 V (or 10 V when 0 to 10 V is selected) or 20 mA, and when OFF, 1 V (or 0 V when 0 to 10 V is selected) or 4 mA.

\* Also, an increase or decrease of the flow will not change the on/off status of the output while the forced output function is activated.

### Accumulated value hold

The accumulated value is not cleared even when the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 1.5 million times, which should be taken into consideration.

### Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

### Setting of security code

The user can select whether a security code must be entered to release the key lock. At the time of shipment from the factory, it is set such that a security code is not required.

### Key-lock function

Prevents operation errors such as accidentally changing setting values

### Reset to the default settings

The product can be returned to its factory default settings.

### Display with zero cut-off setting

When the flow is close to 0 L/min, the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 L/min due to high pressure or depending on the installation. The zero-cut function will force the display to zero. The range to display zero can be changed.

PFG300

PFG300-L


PFG300

Function Details

# PFG300 Series

## ■ Selection of display on sub screen



The display on the sub screen in measuring mode can be set.



Set value display	Accumulated value display	Peak value display
Displays the set value 	Displays the accumulated value 	Displays the peak value 
Bottom value display	Line name display	OFF
Displays the bottom value 	Displays the line name (Up to 5 alphanumeric characters can be input.) 	Displays nothing 

## ■ Analog output free range function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed. The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.

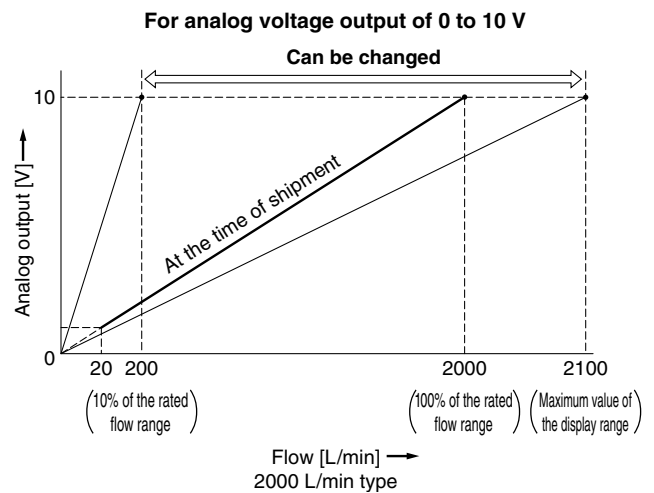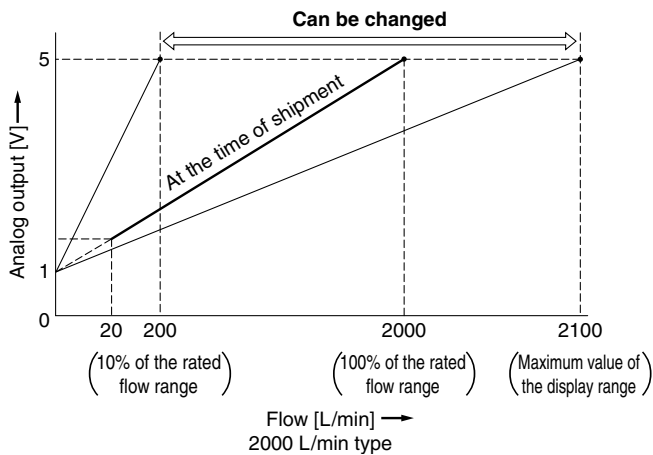

## ■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Description	Contents	Action
Er1 Er2	OUT over current error	A load current of 80 mA or more is applied to the switch output (OUT).	Eliminate the cause of the over current by turning off the power supply and then turning it on again.
HHH	Instantaneous flow error	The flow rate exceeds the maximum value of the display range.	Decrease the flow rate.
LLL	Reverse flow error	There is a reverse flow equivalent to -5% or more.	Change the flow to the correct direction.
999999 flashes x 10 <sup>6</sup>	Accumulated flow error	The flow rate exceeds the accumulated flow rate range.	Clear the accumulated flow rate.
Er0 Er4 Er6 Er7 Er8 Er14 Er40	System error	An internal error has occurred.	Turn the power off and then on again.
Er13	Copy error	The copy function does not operate properly.	After clearing the error by pressing the  and  buttons simultaneously for a minimum of 1 second, check the wiring and the model, and then attempt to copy again.

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.





■ **Copy function**

The set values of the monitor can be copied.

This can reduce setting labor and minimize the risk of setting mistakes.

**The set value can be copied to up to 10 flow monitors simultaneously.**

**(Maximum transmission distance: 4 m)**

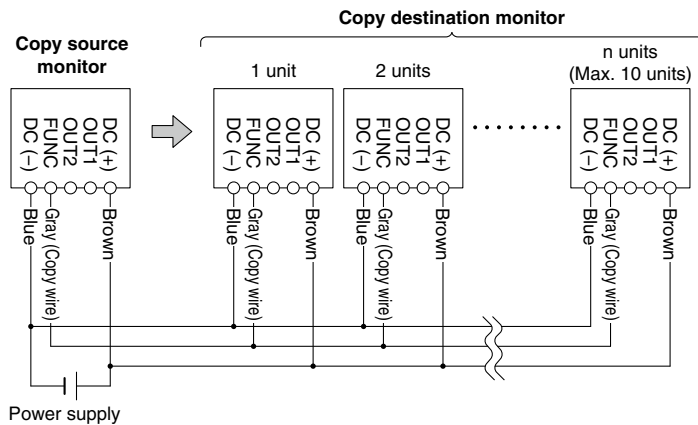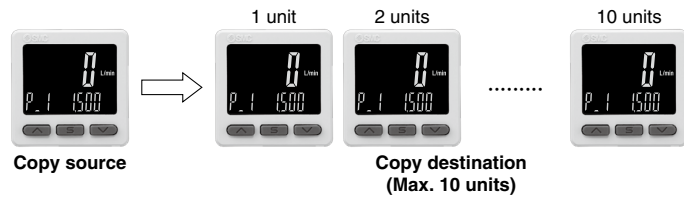

- 1) Wire as shown in the figure on the left.
- 2) All monitors are set to copy destination when first purchased. (Default condition is the monitor to be copied to.)
- 3) Press the **S** button on the source monitor to start copying.

■ **Selection of power saving mode**

The power saving mode can be selected.

With this function, if no buttons are pressed for 30 s, it shifts to power saving mode.

At the time of shipment from the factory, the product is set to the normal mode (the power saving mode is turned off).

(During power saving mode, [ECo] will flash in the sub screen and the operation light will be ON (only when the switch is ON).)

\* There may be a difference in the displayed value on the connected flow switch and the flow monitor. When the flow monitor display is being used, it is recommended to set the flow switch display to OFF mode.

PFG300


PFG300-L


PFG300


Function Details

## Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger :** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

\*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines.  
(Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots – Safety.  
etc.

### Warning

#### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

#### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

#### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

#### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### Caution

#### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.  
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.  
If anything is unclear, contact your nearest sales branch.

### Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

#### Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)  
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.  
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

##### \*2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.  
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

#### Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### Caution

#### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.


#### Revision History

<b>Edition B</b>	* The digital flow monitor PFG300 series has been added. * Number of pages has been increased from 16 to 28.	VU
<b>Edition C</b>	* IO-Link compatible products (PFMC7-L) have been added. * Number of pages has been increased from 28 to 32.	ZP

## Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.

# 2-Color Display



# Digital Flow Switch

Applicable fluid **Dry air, N<sub>2</sub>**

The PFMB7201 has been discontinued. Please select the new PF2M721 series. Click [here](#) for details.



Wide range of flow measurement with one product

**New**

**3-Screen Display**  
Digital Flow Monitor  
Allows for the monitoring of remote lines  
PFG300 Series **p. 24**




Flow ratio\*1 **100:1**

\*1 Rated flow ratio is 10 : 1 for the current PF2A.

Smallest settable increment: **1 L/min**

Current PF2A: 5 L/min (200 L: 2 L/min)

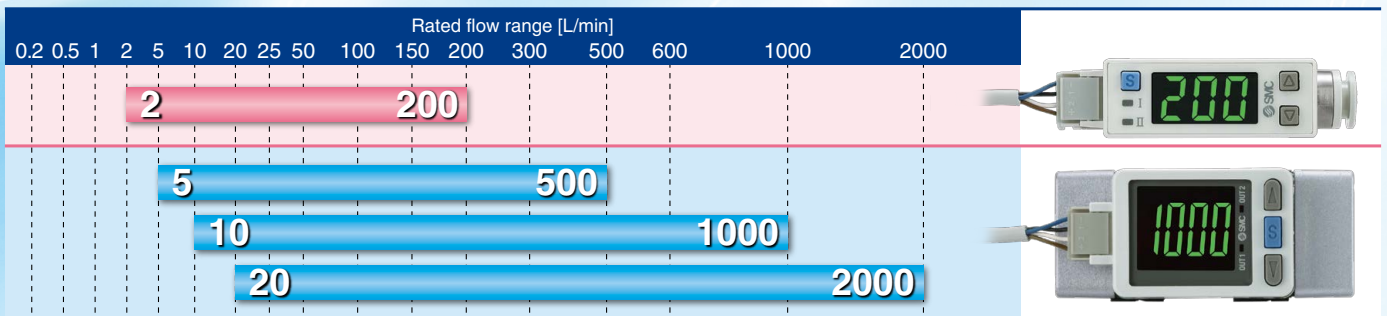

## Compact, Space saving

Compared with the current PF2A

**Weight** Approx. **76% reduction**  
290 g → 70 g

**Mounting space** Approx. **81% reduction**



Compared with the current PF2A


**Weight** Approx. **66% reduction**  
290 g → 100 g

**Mounting space** Approx. **67% reduction**


500 L/1000 L/  
2000 L type



Compared with the PFMB7501-04 and PF2A751-04

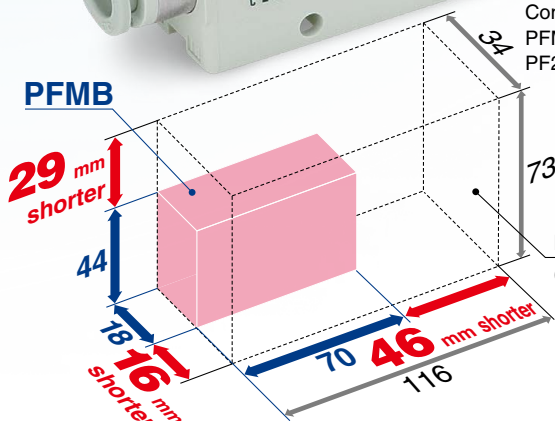

Compared with the PFMB7201 and PF2A721-03

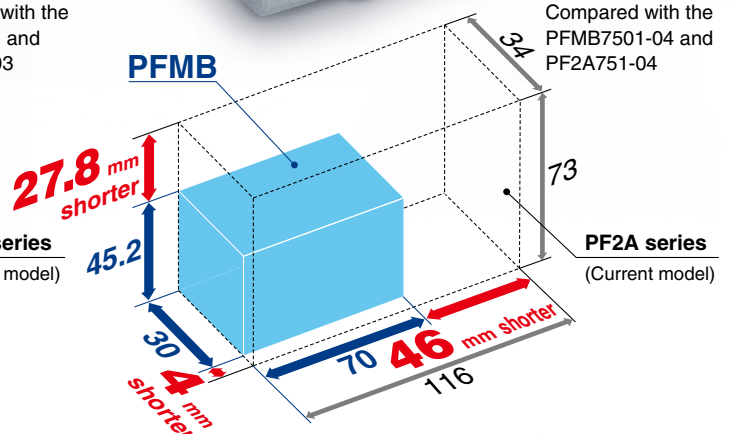

## PFMB Series



# 2-Color Display Digital Flow Switch


**Flow adjustment valve is integrated.**

500 L/1000 L/2000 L type

200 L type

Reduces piping installation work and space requirements. Special design provides smooth adjustment to match needle rotations.

Flow adjustment valve

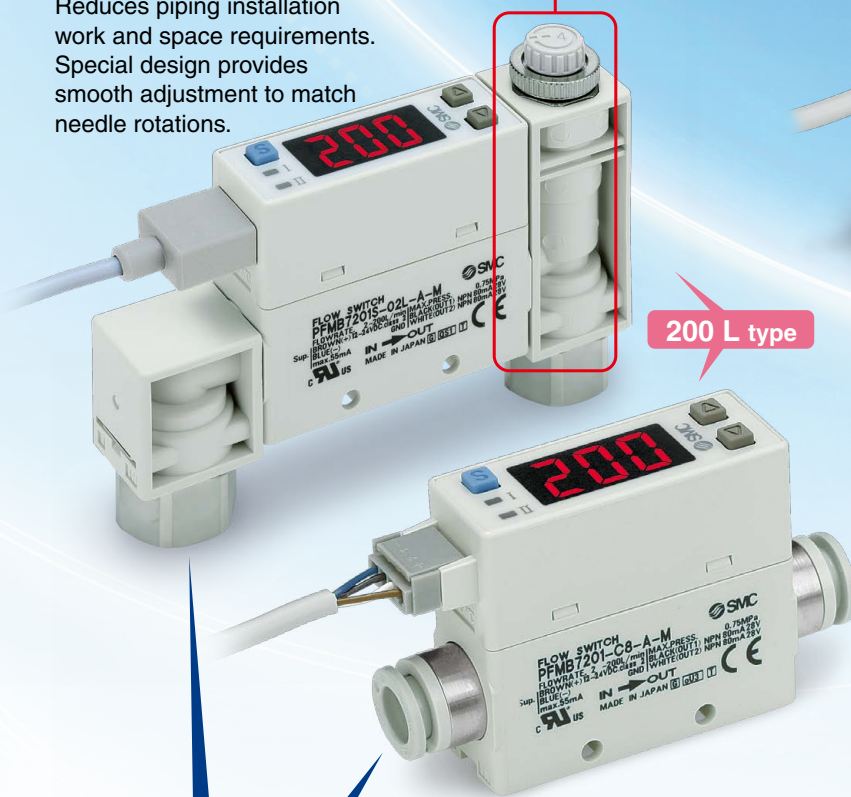

200 L type



**Response time**

Can be selected from

**50 ms (0.05 s) / 0.1 s / 0.5 s / 1.0 s / 2.0 s**

Response time can be set depending on application.

**Grease-free**



**Piping variations**

200 L type

**Straight**

One-touch fitting  $\varnothing 8$



Female thread Rc, NPT, G 1/4



**Bottom**

One-touch fitting  $\varnothing 8$


Female thread Rc, NPT, G 1/4



**Reversible display**

When the switch is used upside down, the orientation of the display can be rotated to make it easier to read.

When display is upside down.

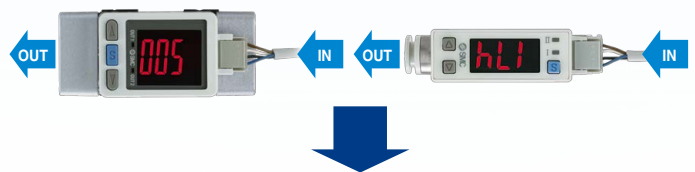

**With a reversible display function (Can be set with the reversible display mode.)**




\* For the straight section of piping, refer to "IN Side Straight Piping Length and Accuracy" on page 12.

**Functions** (Refer to pages 30 and 31 for details.)

- Output operation
- Display color
- Reference condition
- Display mode
- Response time
- Display OFF mode
- Setting of security code
- External input function
- Forced output function
- Accumulated value hold
- Peak/Bottom value display
- Keylock function
- Analog output free range function
- Reversible display mode
- Reset to the default settings
- Error display function



**Bypass structure**

Bypass structure with protruding part at the main piping, reduces the contact of moist air with the sensor, reducing degradation of the sensor and maintaining accuracy.




# Digital flow switch to save energy!

**Flow control** is necessary for promoting energy saving in any application. Saving energy starts from numerical control of the flow consumption of equipment and lines and clarification of the purpose and effect.


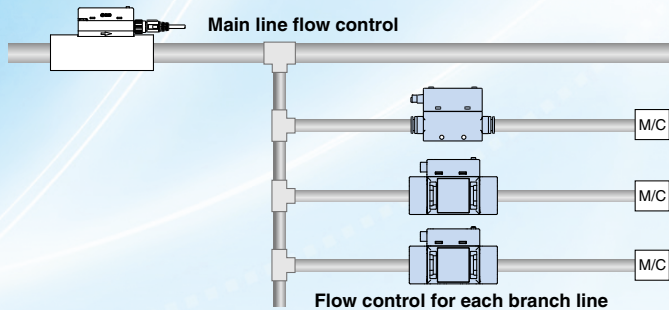
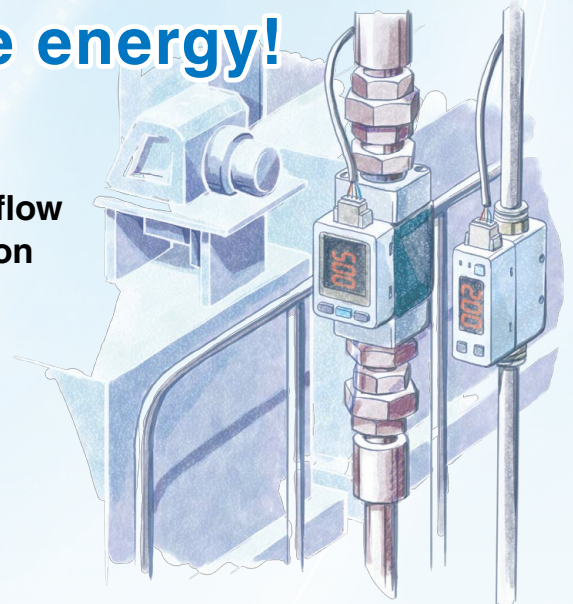


- Digital display allows **visualization of flow rate**.
- **2-color** display, Improved visibility
- **Remote control** is possible with accumulated pulse.

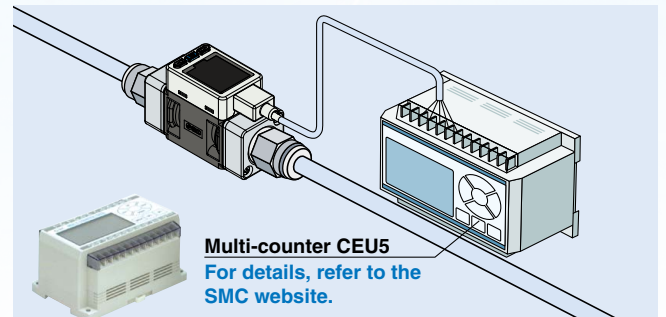

## Applications

- Control of purge air flow of ionizer
- Flow control of the air for spray painting
- Flow control of N<sub>2</sub> gas to prevent lead frame oxidation
- N<sub>2</sub> blow prevents distortion of camera image due to air turbulence.
- Accumulated indication shows the operating flow rate or residual amount (of N<sub>2</sub> etc.) in a gas cylinder.

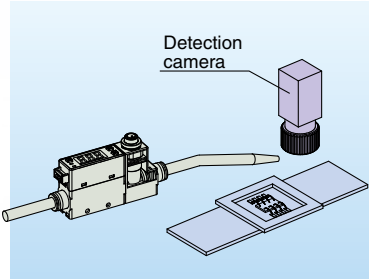

## Mounting

**200 L type**

Through-hole

DIN rail

Bracket


Panel mount

**500 L/1000 L/2000 L type**

Bracket

### Example of recommended pneumatic circuit

Air quality in the product specification can be satisfied by using this pneumatic circuit.

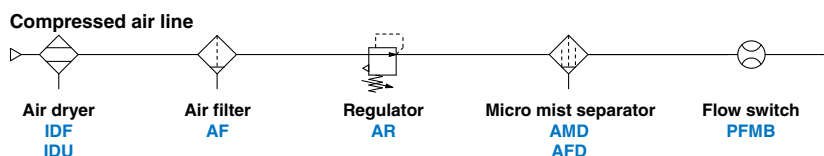




# 3-Screen Display Digital Flow Monitor

## PFG300 Series p. 24




### Allows for the Monitoring of Remote Lines

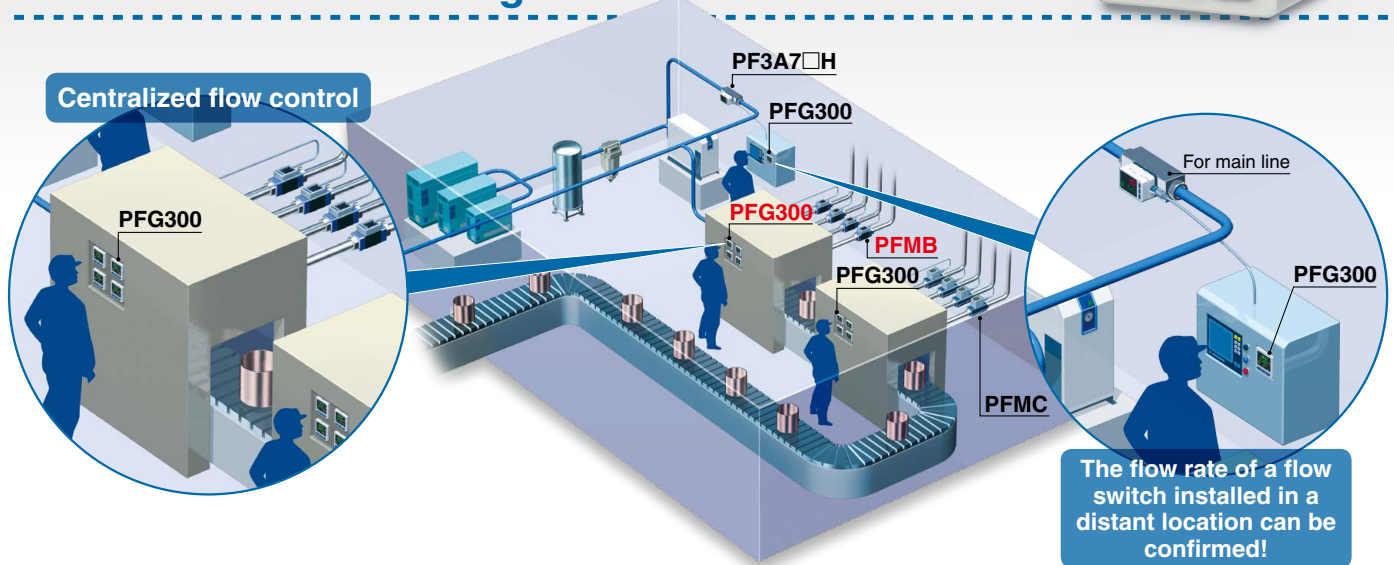

### Visualization of Settings


The sub screen (label) shows the item to be set.

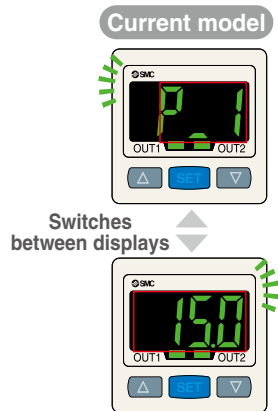


Mode Examples	Hysteresis mode					
	Normal output	Set value (Threshold value)	Reversed output	Set value (Threshold value)	Hysteresis	Set hysteresis value
	P.L	1500	n.L	1500	H.L	150
Mode Examples	Window comparator mode					
	Normal output/Lo side	Set value (Threshold value)	Normal output/Hi side	Set value (Threshold value)		
	P.L	900	P.H	1800		
	Reversed output/Lo side	Set value (Threshold value)	Reversed output/Hi side	Set value (Threshold value)		
	n.L	900	n.H	1800		

### Easy Screen Switching

It is possible to change the settings while checking the measured value.

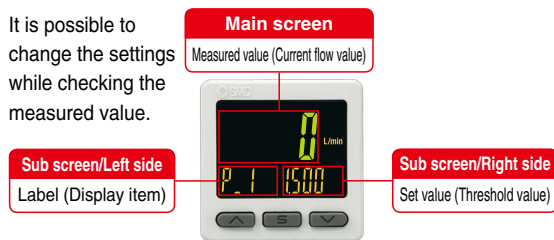



The sub screen can be switched by pressing the up/down buttons.

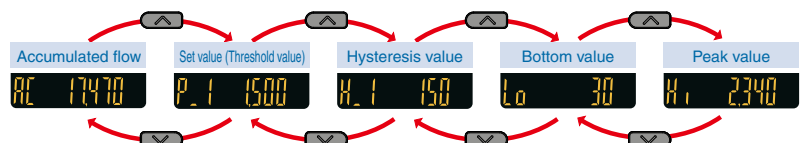

\* Either "Input of line name" or "Display OFF" can be added via the function settings.

### Simple 3-Step Setting

When the S button is pressed and the set value (P\_1) is being displayed, the set value (threshold value) can be set. When the S button is pressed and the hysteresis (H\_1) is being displayed, the hysteresis value can be set.

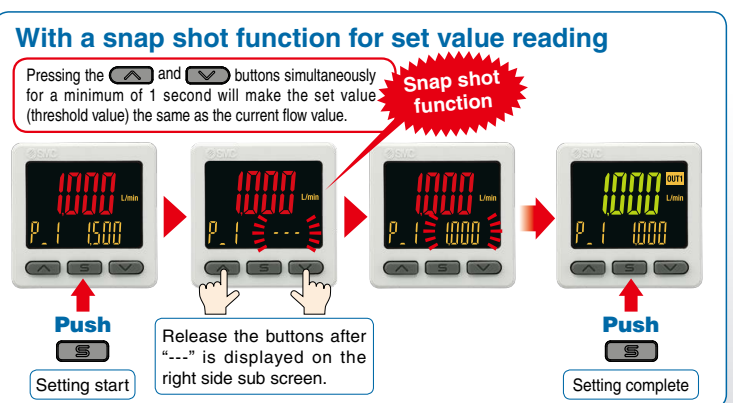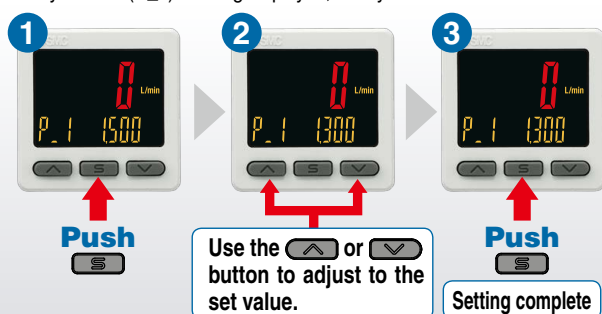

## NPN/PNP Switch Function

The number of stock items can be reduced.




## Analog output of 0 to 10 V is also available.

Voltage output	1 to 5 V 0 to 10 V	Switchable
Current output	4 to 20 mA	Fixed

## Convenient Functions

### ● Copy function

The set values of the monitor can be copied.

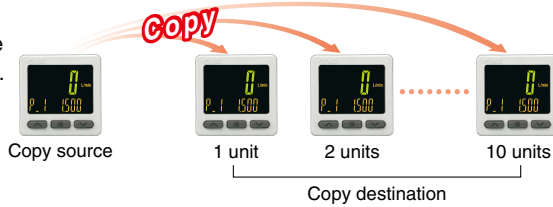

### ● Security code

The key locking function keeps unauthorized persons from tampering with the settings.

### ● Power saving mode

Power consumption is reduced by turning off the monitor.

Current consumption*1	Reduction rate*2
25 mA or less	Approx. 50% reduction

\*1 During normal operation \*2 In power saving mode

### ● External input function

The accumulated value, peak value, and bottom value can be reset remotely.


## Functions (▶ Refer to pages 32 to 34 for details.)

- Output operation
- Simple setting mode
- Display color
- Delay time setting
- Digital filter setting
- FUNC output switching function
- Selectable analog output function
- External input function
- Forced output function
- Accumulated value hold
- Peak/Bottom value display
- Setting of security code
- Keylock function
- Reset to the default settings
- Display with zero cut-off setting
- Selection of display on sub screen
- Analog output free range function
- Error display function
- Copy function
- Selection of power saving mode


## Mounting

The bracket configuration allows for mounting in four orientations.

### Bracket A

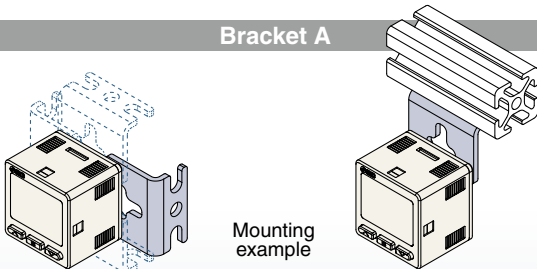

### Bracket B

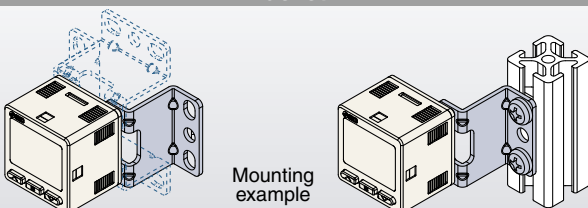


### Panel mount

Mountable side by side without clearance

### One opening!

- Reduced panel fitting labor
- Space saving

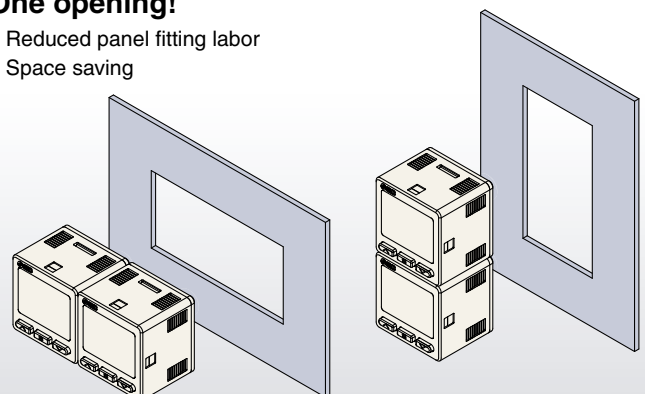


## Input Range Selection (for Pressure/Flow rate)

The displayed value to the sensor input can be set as required.


(Voltage input: 1 to 5 V/Current input: 4 to 20 mA)

Pressure switch/Flow switch can be displayed.



A is displayed for 1 V (or 4 mA).  
B is displayed for 5 V (or 20 mA).  
The range can be set as required.

■ Pressure Sensor for General Fluids/PSE570




	A	B
PSE570	0	1,000
PSE573	-100	100
PSE574	0	500

Set A and B to the values shown in the table above.


## Compact & Lightweight





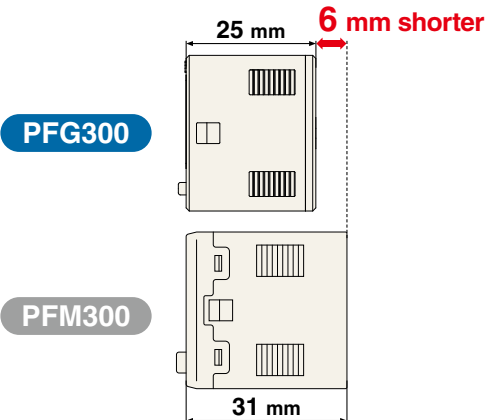




● Compact: Max. 6 mm shorter

● Lightweight: Max. 5 g lighter (30 g → 25 g)










# Flow Switch Flow Rate Variations

Series	Applicable fluid	Detection method	Rated flow range [L/min]									
			-3	-2	-1	-0.5	0	0.5	1	2	3	
<b>PFMV</b> 	Dry air N <sub>2</sub>	Thermal type (MEMS)	0					0.5				
			0					1				
			0									3
					-0.5			0.5				
					-1				1			
		-3								3		

Series	Availability of the digital flow monitor PFG300	Applicable fluid	Detection method	Smallest settable increment	Rated flow range [L/min]																					
					0.2	0.5	1	2	5	10	20	25	50	100	150	200	300	500	600	1000	2000	3000	6000	12000		
<b>PFM</b> 	—	Dry air N <sub>2</sub> Ar CO <sub>2</sub>	Thermal type (MEMS)	0.01 L/min																						
				0.1 L/min																						
<b>PFMB</b> p. 9  	PFG300 p. 24 	Dry air N <sub>2</sub>	Thermal type (MEMS) Bypass flow type	1 L/min																						
<b>PFMC</b> 	PFG300 	Dry air N <sub>2</sub>	Thermal type (MEMS) Bypass flow type	1 L/min																						
<b>PF2A</b> 	—	Air N <sub>2</sub>	Thermal type (Thermistor)	0.1 L/min																						
				0.5 L/min																						
				1 L/min																						
				2 L/min																						
				5 L/min																						
<b>PF3A7□H</b> 	PFG300 	Air N <sub>2</sub>	Thermal type (Platinum sensor) Bypass flow type	2 L/min																						
				5 L/min																						
				10 L/min																						

# Flow Switch Variations / Basic Performance Table

Series	PFMV 	PFM 	PFMB p. 9  PFG300 p. 24 	PFMC 	PF2A 	PF3A7□H 
Enclosure	IP40	IP40	IP40	IP65 [Monitor unit IP40]	IP65	IP65 [Monitor unit IP40]
Fluid	Dry air, N <sub>2</sub>	Dry air, N <sub>2</sub> , Ar, CO <sub>2</sub>	Dry air, N <sub>2</sub>	Dry air, N <sub>2</sub>	Air, N <sub>2</sub>	Air, N <sub>2</sub>
Setting	Digital	Digital	Digital	Digital	Digital	Digital
Rated flow range	0 to 0.5 L/min -0.5 to 0.5 L/min 0 to 1 L/min -1 to 1 L/min 0 to 3 L/min -3 to 3 L/min	0.2 to 10 L/min 0.5 to 25 L/min 1 to 50 L/min 2 to 100 L/min	2 to 200 L/min 5 to 500 L/min 10 to 1000 L/min 20 to 2000 L/min	5 to 500 L/min 10 to 1000 L/min 20 to 2000 L/min	1 to 10 L/min 5 to 50 L/min 10 to 100 L/min 20 to 200 L/min 50 to 500 L/min	30 to 3000 L/min 60 to 6000 L/min 120 to 12000 L/min
Power supply voltage	12 to 24 VDC ±10%	24 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	12 to 24 VDC ±10%	24 VDC ±10%
Temperature characteristics (25°C standard)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)	±2% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)	±3% F.S. (15 to 35°C) ±5% F.S. (0 to 50°C)	±5% F.S. (0 to 50°C) [Monitor unit] ±0.5% F.S. (0 to 50°C)
Repeatability	±2% F.S. (Fluid: Dry air) Analog output: ±5% F.S. [Monitor unit] ±0.1% F.S. Analog output: ±0.3% F.S.	±1% F.S. (Fluid: Dry air) Analog output: ±3% F.S.	±1% F.S. (Fluid: Dry air) [Monitor unit] ±0.1% F.S. ±1 digit	±1% F.S. (Fluid: Dry air) [Monitor unit] ±0.1% F.S. ±1 digit	±1% F.S. (PF2A7□0) ±2% F.S. (PF2A7□1)	±1% F.S. [Monitor unit] ±0.1% F.S. ±1 digit
Hysteresis	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Variable	Hysteresis mode: Variable Window comparator mode: Fixed (3 digits)	Hysteresis mode: Variable Window comparator mode: Variable
Output	NPN/PNP open collector Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output	NPN/PNP open collector Accumulated pulse output	NPN/PNP open collector Accumulated pulse output Analog voltage output Analog current output
Display	[Monitor unit 2-color LCD display]	2-color LED display	2-color LED display / 2-color LCD display [Monitor unit 3-color LCD display]	3-color LCD display	LED display	3-color LCD display

\* The monitor unit shows the PFG300 and PFMV3.



# CONTENTS

**2-Color Display**

**Digital Flow Switch *PFMB Series***

**3-Screen Display**

**Digital Flow Monitor *PFG300 Series***



**2-Color Display Digital Flow Switch PFMB Series**

- How to Order ..... p. 9
- Specifications ..... p. 11
- Flow Range ..... p. 12
- Analog Output ..... p. 12
- Pressure Loss ..... p. 12
- IN Side Straight Piping Length and Accuracy ..... p. 12
- Internal Circuits and Wiring Examples ..... p. 13
- Construction: Parts in Contact with Fluid ..... p. 14
- Dimensions ..... p. 15

**3-Screen Display Digital Flow Monitor PFG300 series**

- How to Order ..... p. 24
- Specifications ..... p. 25
- Internal Circuits and Wiring Examples ..... p. 26
- Dimensions ..... p. 27

- PFMB/Function Details** ..... p. 30
- PFG300/Function Details** ..... p. 32
- Safety Instructions** ..... Back Cover

PFMB

PFG300

Function Details



# 2-Color Display

## Digital Flow Switch


# PFMB7 Series



RoHS

The PFMB7201 has been discontinued. Please select the new PF2M721 series. Click [here](#) for details.

### How to Order

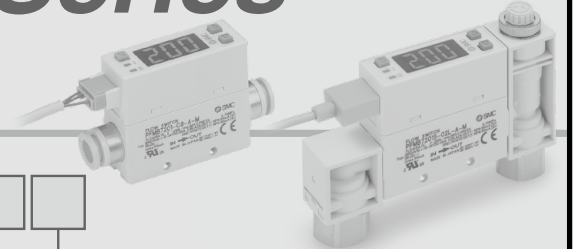

PFMB7 201    - C8    - A    - M      

#### Rated flow range (Flow rate range)

201	2 to 200 L/min
-----	----------------

#### Flow adjustment valve


Nil	None
S	Yes

#### Port size

C8	ø8 (5/16") One-touch fitting
O2*1	Rc1/4
N02*1	NPT1/4
F02*1	G1/4 *2

\*1 Made to order  
\*2 ISO1179-1 compliant

#### Piping entry direction

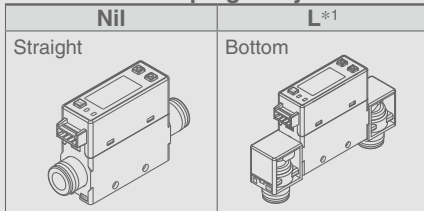

\*1 Made to order

#### Output specification

	OUT1	OUT2	Applicable monitor unit model
A	NPN	NPN	—
B	PNP	PNP	—
C	NPN	Analog 1 to 5 V	PFG300 series
D	NPN	Analog 4 to 20 mA	PFG310 series
E*1	PNP	Analog 1 to 5 V	PFG300 series
F*1	PNP	Analog 4 to 20 mA	PFG310 series
G*1	NPN	External input *2	—
H*1	PNP	External input *2	—

\*1 Made to order  
\*2 Accumulated flow value, peak/bottom flow value can be reset by external signal input.

#### Option 1

Nil	W
Lead wire with connector (2 m)  ZS-33-D	Lead wire with connector (2 m) + Rubber cover for connector (Silicone rubber) ZS-33-F ZS-33-D
N Without lead wire with connector	* When only optional parts are required, refer to Option 1/Part Nos. on page 10.

#### Calibration certificate \*1

Nil	None
A*2	With calibration certificate

\*1 Certificate in both English and Japanese  
\*2 Made to order

#### Unit specification

M	SI unit only *1
Nil	Units selection function *2

\*1 Fixed unit: Instantaneous flow: L/min  
Accumulated flow: L  
\*2 This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)  
Unit can be changed. Instantaneous flow: L/min ↔ cfm  
Accumulated flow: L ↔ ft<sup>3</sup>

#### Option 2

Nil	R	S
No bracket	Bracket (For without flow adjustment valve) ZS-33-M  With 2 tapping screws	Bracket (For with straight type flow adjustment valve) ZS-33-MS  With 3 tapping screws
T	V	
Panel mount adapter (For without flow adjustment valve) ZS-33-J  Panel mount adapter A Panel mount adapter B Panel	Panel mount adapter (For with flow adjustment valve) ZS-33-JS  Panel mount adapter A Panel mount adapter B Panel	


\* Options are shipped together with the product, but not assembled. When only optional parts are required, refer to Option 2/Part Nos. on page 10.

### DIN Rail Mounting Bracket (Ordered Separately)

ZS-33-R   

#### Stations

1	1 station
2	2 stations
3	3 stations
4	4 stations
5	5 stations

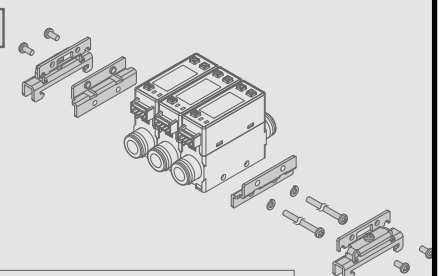

• The DIN rail should be provided by the customer.  
• The DIN rail is not suitable for port size F02 (G1/4).



**How to Order**

**PFMB7** **501** - **04** - **A** - **M**

**Rated flow range (Flow rate range)**

<b>501</b>	5 to 500 L/min
<b>102</b>	10 to 1000 L/min
<b>202</b>	20 to 2000 L/min

**Thread type**

<b>Nil</b>	Rc
<b>N</b>	NPT
<b>F</b>	G*1

\*1 ISO228 compliant

**Port size**

	Port size	Rated flow range		
		<b>501</b>	<b>102</b>	<b>202</b>
<b>04</b>	1/2	●	●	—
<b>06</b>	3/4	—	—	●



**Output specification**

	OUT1	OUT2	Applicable monitor unit model
<b>A</b>	NPN	NPN	—
<b>B</b>	PNP	PNP	—
<b>C</b>	NPN	Analog 1 to 5 V	PFG300 series
<b>D</b>	NPN	Analog 4 to 20 mA	PFG310 series
<b>E</b> *1	PNP	Analog 1 to 5 V	PFG300 series
<b>F</b> *1	PNP	Analog 4 to 20 mA	PFG310 series
<b>G</b> *1	NPN	External input *2	—
<b>H</b> *1	PNP	External input *2	—

\*1 Made to order

\*2 Accumulated flow value, peak/bottom flow value can be reset by external signal input.

**Option 1**

<b>Nil</b>	<b>W</b>
Lead wire with connector (2 m)	Lead wire with connector (2 m) + Rubber cover for connector (Silicone rubber)
	
<b>N</b>	* When only optional parts are required, refer to Option 1/Part Nos. below.
Without lead wire with connector	


**Calibration certificate** \*1

<b>Nil</b>	None
<b>A</b> *2	With calibration certificate

\*1 Certificate in both English and Japanese

\*2 Made to order

**Option 2**
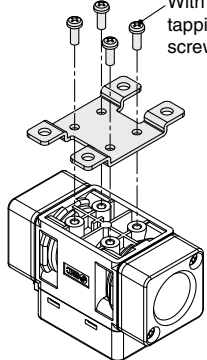
<b>Nil</b>	<b>R</b>
No bracket	With bracket 

\* Options are shipped together with the product, but not assembled. When only optional parts are required, refer to Option 2/Part Nos. below.

**Unit specification**

<b>M</b>	SI unit only*1
<b>Nil</b>	Units selection function *2

\*1 Fixed unit: Instantaneous flow: L/min  
Accumulated flow: L

\*2 This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

Unit can be changed. Instantaneous flow: L/min ↔ cfm  
Accumulated flow: L ↔ ft<sup>3</sup>

**Option 1/Part Nos.**

Option	Part no.	Qty.	Note
Lead wire with connector	<b>ZS-33-D</b>	1	Lead wire: 2 m
Rubber cover (Silicone rubber)	<b>ZS-33-F</b>	1	For connector

**Option 2/Part Nos.**

Option	Part no.	Qty.	Note
Bracket (for PFMB7201)	<b>ZS-33-M</b>	1	With 2 tapping screws (3 x 6)
Bracket (for PFMB7201S)	<b>ZS-33-MS</b>	1	With 3 tapping screws (3 x 6)
Panel mount adapter (for PFMB7201)	<b>ZS-33-J</b>	1	
Panel mount adapter (for PFMB7201S)	<b>ZS-33-JS</b>	1	
Bracket (for PFMB7501/7102)	<b>ZS-42-C</b>	1	With 4 tapping screws (3 x 6)
Bracket (for PFMB7202)	<b>ZS-42-D</b>	1	With 4 tapping screws (3 x 6)

# PFMB7 Series

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website. Click [here](#) for details.

## Specifications

Model		PFMB7201	PFMB7501	PFMB7102	PFMB7202	
Fluid	Applicable fluid *1	Dry air, N <sub>2</sub> (Air quality grade is JIS B 8392-1 1.1.2 to 1.6.2, ISO 8573-1 1.1.2 to 1.6.2)				
	Fluid temperature range	0 to 50°C				
Flow	Detection method	Thermal type				
	Rated flow range	2 to 200 L/min	5 to 500 L/min	10 to 1000 L/min	20 to 2000 L/min	
	Set point range	Instantaneous flow 2 to 210 L/min	Instantaneous flow 5 to 525 L/min	Instantaneous flow 10 to 1050 L/min	Instantaneous flow 20 to 2100 L/min	
	Smallest settable increment	Instantaneous flow 0 to 999,999,999 L	1 L/min		0 to 999,999,990 L	
	Accumulated volume per pulse (Pulse width = 50 ms)	1 L		10 L		
	Accumulated value hold function *2	1 L/pulse				
	Accumulated value hold function *2	Intervals of 2 or 5 minutes can be selected.				
Pressure	Rated pressure range	0 to 0.75 MPa	0 to 0.8 MPa			
	Proof pressure	1.0 MPa	1.2 MPa			
	Pressure loss	Refer to "Pressure Loss" graph.				
Electrical	Pressure characteristics *3	±5% F.S. (0 to 0.75 MPa, 0.35 MPa standard)				
	Power supply voltage	12 to 24 VDC ±10%				
	Current consumption	55 mA or less				
Accuracy *11	Protection	Polarity protection				
	Display accuracy	±3% F.S.				
	Analog output accuracy	±3% F.S.				
	Repeatability	±1% F.S. (±2% F.S. when the response time is set to 0.05 s)				
	Temperature characteristics	±5% F.S. (0 to 50°C, 25°C standard)				
Switch output	Output type	NPN open collector PNP open collector				
	Output mode	Select from Hysteresis, Window comparator, Accumulated output, or Accumulated pulse output modes.				
	Switch operation	Select from Normal or Reversed output.				
	Maximum load current	80 mA				
	Maximum applied voltage (NPN only)	28 VDC				
	Internal voltage drop (Residual voltage)	NPN output type: 1 V or less (at load current of 80 mA) PNP output type: 1.5 V or less (at load current of 80 mA)				
	Response time *4	Select from 0.05 s, 0.1 s, 0.5 s, 1 s, or 2 s.				
	Hysteresis *5	Variable from 0				
Analog output *6	Protection	Short circuit protection				
	Output type	Voltage output: 1 to 5 V, Current output: 4 to 20 mA				
	Impedance	Output impedance: Approx. 1 kΩ				
External input *8	Current output	Maximum load impedance at power supply voltage of 24 V: 600 Ω, at power supply voltage of 12 V: 300 Ω				
	Response time *7	Linked to the response time of the switch output				
External input *8	External input	Input voltage: 0.4 V or less (Reed or Solid state) for 30 ms or longer				
	Input mode	Select from Accumulated value external reset or Peak/Bottom value reset.				
Display	Reference condition *9	Select from Standard conditions or Normal conditions.				
	Display mode	Select from Instantaneous flow or Accumulated flow.				
	Unit *10	L/min or cfm can be selected.				
	Display range	Instantaneous flow	L or ft <sup>3</sup> can be selected.	L or ft <sup>3</sup> can be selected.	L or ft <sup>3</sup> can be selected.	L or ft <sup>3</sup> can be selected.
		Accumulated flow	-10 to 210 L/min (Displays [0] when value is within the -1 to 1 L/min range)	-25 to 525 L/min (Displays [0] when value is within the -4 to 4 L/min range)	-50 to 1050 L/min (Displays [0] when value is within the -9 to 9 L/min range)	-100 to 2100 L/min (Displays [0] when value is within the -19 to 19 L/min range)
	Minimum display unit	Instantaneous flow	0 to 999,999,999 L		1 L/min	
	Display	Accumulated flow *13	1 L		10 L	
Indicator LED	LED, Color: Red/Green, 3 digits, 7 segments	LED ON when switch output is ON (OUT1: Green, OUT2: Red)				
Environment	Enclosure	IP40				
	Withstand voltage	1000 VAC for 1 minute between terminals and housing				
	Insulation resistance	50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing				
	Operating temperature range	Operating: 0 to 50°C, Stored: -10 to 60°C (No condensation or freezing)				
Standards	Operating humidity range	Operating/Stored: 35 to 85% RH (No condensation or freezing)				
		CE, UL (CSA), RoHS	CE, RoHS			
Piping	Piping specification	Rc1/4, NPT1/4, G1/4, ø8 One-touch fitting	Rc1/2, NPT1/2, G1/2	Rc3/4, NPT3/4, G3/4		
	Piping entry direction	Straight, Bottom				
Main materials of parts in contact with fluid *12	FKM, Stainless steel 304, PPS, PBT, Brass (Electroless nickel plating), HNBR, Si, Au, GE4F					
Weight	Body	Rc1/4, NPT1/4/Straight: 70 g, Bottom: 85 g G1/4/Straight: 115 g, Bottom: 130 g ø8 One-touch fitting/Straight: 50 g, Bottom: 65 g	100 g	155 g		
	Flow adjustment valve	+45 g				
	Lead wire	+35 g				
	Bracket	+20 g		+25 g		
	Panel mount adapter	+15 g				
DIN rail mounting bracket	+65 g					

- \*1 Refer to the "Example of recommended pneumatic circuit" on page 2.  
 \*2 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 1 million times. If the product is operated 24 hours per day, the product life will be as follows:  
 • 5 min interval: life is calculated as 5 min x 1 million = 5 million min = 9.5 years  
 • 2 min interval: life is calculated as 2 min x 1 million = 2 million min = 3.8 years  
 If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.  
 \*3 Do not release the OUT side piping port of the product directly to the atmosphere without connecting piping. If the product is used with the piping port released to atmosphere, accuracy may vary.  
 \*4 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the switch output turns ON (or OFF) when set to be 90% of the rated flow rate  
 \*5 If the flow fluctuates around the set value, the width for setting more than

- the fluctuating width needs to be set. Otherwise, chattering will occur.  
 \*6 When using a product with an analog output  
 \*7 The time from when the flow is changed by a step input (when the flow rate changes from 0 to the maximum value of the rated flow range instantaneously) until the analog output reaches 90% of the rated flow rate  
 \*8 When using a product with an external input  
 \*9 The flow rate given in the specifications is the value under standard conditions.  
 \*10 Setting is only possible for models with the units selection function.  
 \*11 For details, refer to "IN Side Straight Piping Length and Accuracy" on page 12.  
 \*12 For details, refer to "Construction: Parts in Contact with Fluid" on page 14.  
 \*13 The accumulated flow display is the upper 3-digit, middle 3-digit, and lower 3-digit (total of 9 digits) display. The position of the dots on the upper part of the screen indicates which digits are displayed.  
 \* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

## Flow Range

Model	Flow range					
	-100 L/min	0 L/min	200 L/min	500 L/min	1000 L/min	2000 L/min
PFMB7201		2 L/min	200 L/min			
		2 L/min	210 L/min			
		-10 L/min	210 L/min			
PFMB7501		5 L/min	500 L/min			
		5 L/min	525 L/min			
		-25 L/min	525 L/min			
PFMB7102		10 L/min	1000 L/min			
		10 L/min	1050 L/min			
		-50 L/min	1050 L/min			
PFMB7202		20 L/min	2000 L/min			
		20 L/min	2100 L/min			
		-100 L/min	2100 L/min			


Rated flow range  
  Set point range  
  Display range

## Analog Output

### Flow/Analog Output


	A	B	C
Voltage output	1 V	1.04 V	5 V
Current output	4 mA	4.16 mA	20 mA

Model	Minimum value of the rated flow range	Maximum value of the rated flow range
PFMB7201	2 L/min	200 L/min
PFMB7501	5 L/min	500 L/min
PFMB7102	10 L/min	1000 L/min
PFMB7202	20 L/min	2000 L/min

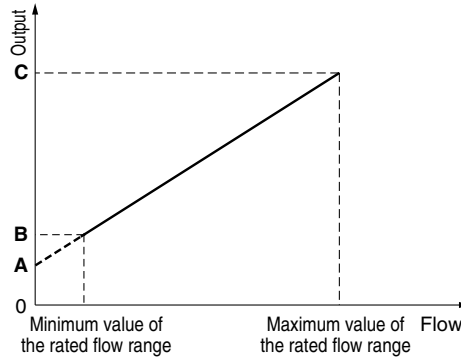


## Pressure Loss (Reference Data)


### PFMB7201 (for 200 L/min) (Without flow adjustment valve)

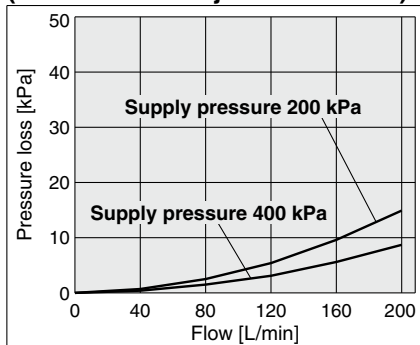


### PFMB7501 (for 500 L/min)

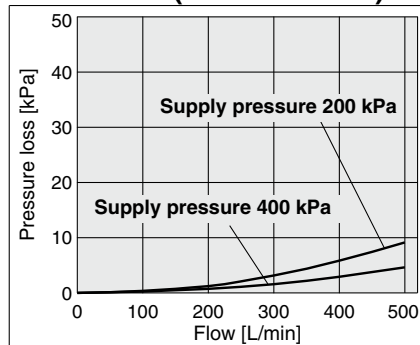

### PFMB7102 (for 1000 L/min)

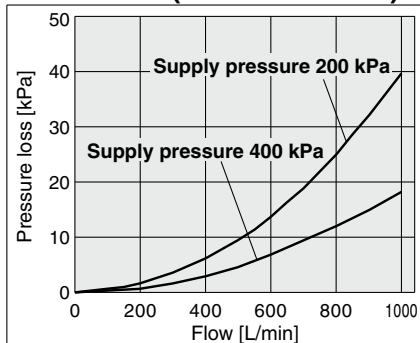


### PFMB7202 (for 2000 L/min)

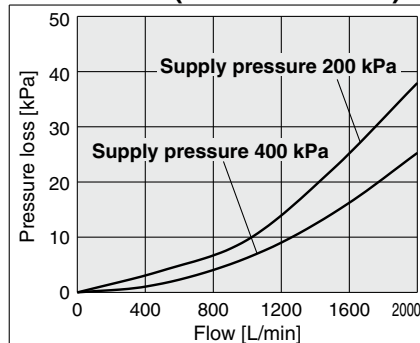


## Flow Adjustment Valve Flow Rate Characteristics (Reference Value)

### PFMB7201 (for 200 L/min)

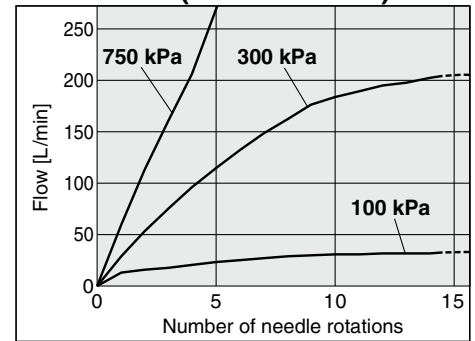


## IN Side Straight Piping Length and Accuracy (Reference Data)

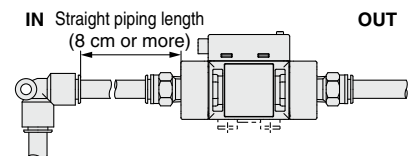

- The piping on the IN side must have a straight section of piping with a length of 8 cm or more. If a straight section of piping is not installed, the accuracy can vary by approximately  $\pm 2\%$  F.S.
  - \* "Straight section" means a part of the piping without any bends or rapid changes in the cross sectional area.
  - When the PFMB7201 is connected to tubing, use a tube I.D. 5 mm just before the product.
  - When the PFMB7501 or 7102 is connected to tubing, use a tube I.D. 9 mm or more just before the product.
- The accuracy can vary by approximately  $\pm 2\%$  F.S. when such tubing is not used.

### PFMB7201/7501/7102/7202

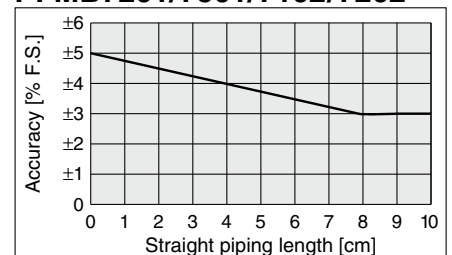


# PFMB7 Series

## Internal Circuits and Wiring Examples

### NPN (2 outputs) type


PFMB7□□□-□□-**A**□-□□□

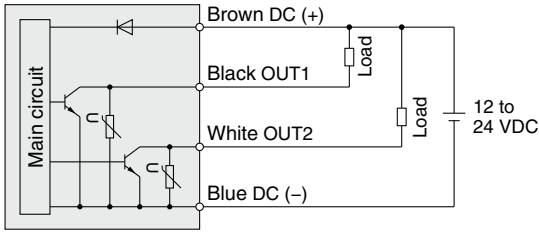

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less

### PNP (2 outputs) type

PFMB7□□□-□□-**B**□-□□□

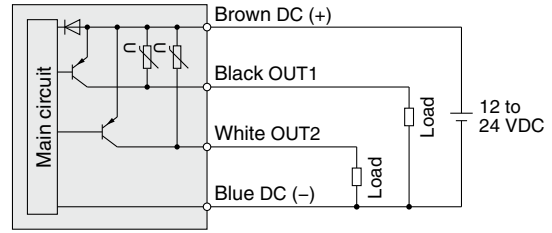


Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

### NPN (1 output) + Analog (1 to 5 V) output type

PFMB7□□□-□□-**C**□-□□□

### NPN (1 output) + Analog (4 to 20 mA) output type

PFMB7□□□-□□-**D**□-□□□

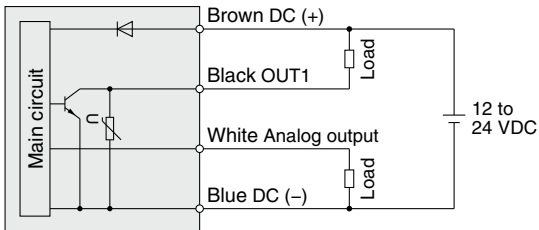

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less

C: Analog output: 1 to 5 V

Output impedance: 1 kΩ

D: Analog output: 4 to 20 mA


Max. load impedance: 600 Ω

### PNP (1 output) + Analog (1 to 5 V) output type

PFMB7□□□-□□-**E**□-□□□

### PNP (1 output) + Analog (4 to 20 mA) output type

PFMB7□□□-□□-**F**□-□□□

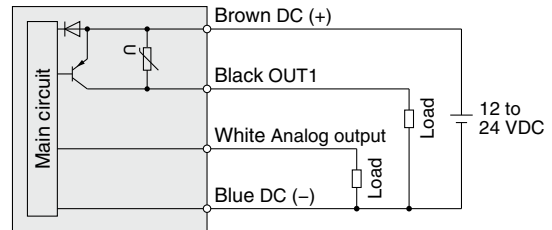

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less

E: Analog output: 1 to 5 V


Output impedance: 1 kΩ

F: Analog output: 4 to 20 mA

Max. load impedance: 600 Ω

### NPN (1 output) + External input type


PFMB7□□□-□□-**G**□-□□□

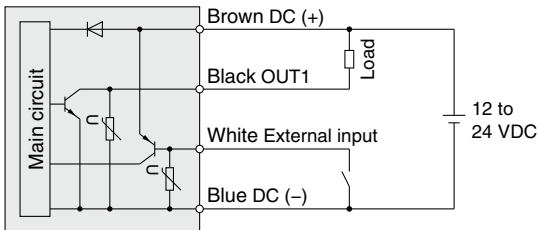

Max. applied voltage: 28 V, Max. load current: 80 mA, Internal voltage drop: 1 V or less  
External input: Input voltage 0.4 V or less (Reed or Solid state input) for 30 ms or longer

### PNP (1 output) + External input type

PFMB7□□□-□□-**H**□-□□□

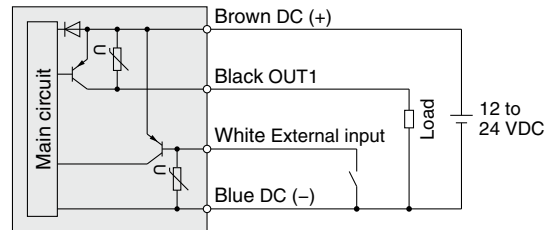

Max. load current: 80 mA, Internal voltage drop: 1.5 V or less  
External input: Input voltage 0.4 V or less (Reed or Solid state input) for 30 ms or longer

## Accumulated pulse output wiring examples

### NPN (2 outputs) type

PFMB7□□□-□□-**A**□-□□□



### NPN (1 output) + Analog output type

PFMB7□□□-□□-**C**□-□□□

PFMB7□□□-□□-**D**□-□□□

### NPN (1 output) + External input type

PFMB7□□□-□□-**G**□-□□□

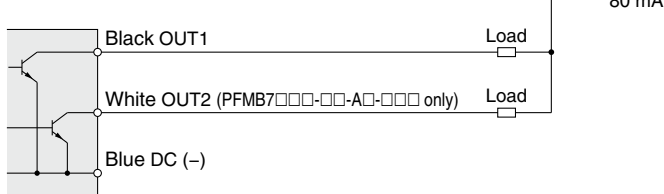

### PNP (2 outputs) type

PFMB7□□□-□□-**B**□-□□□



### PNP (1 output) + Analog output type

PFMB7□□□-□□-**E**□-□□□

PFMB7□□□-□□-**F**□-□□□




### PNP (1 output) + External input type

PFMB7□□□-□□-**H**□-□□□

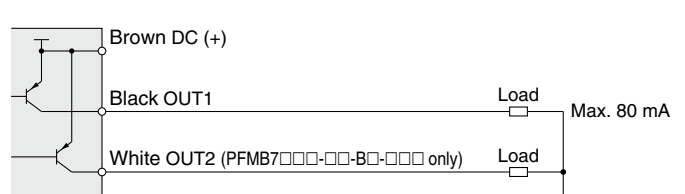

**Construction: Parts in Contact with Fluid**


**PFMB7201**

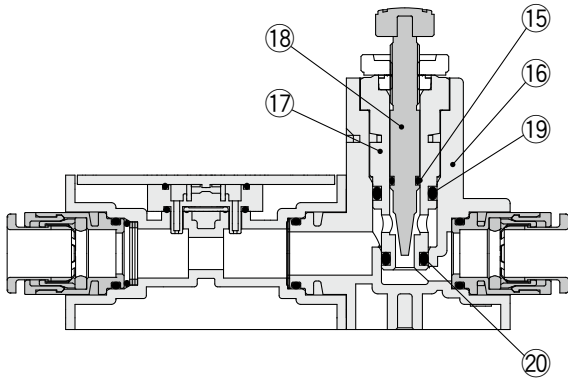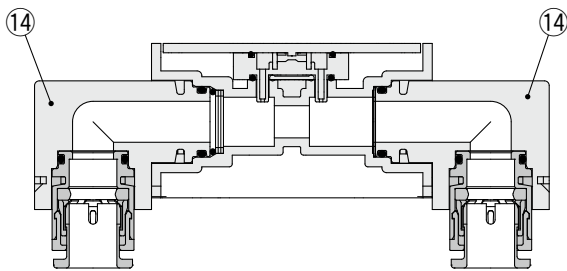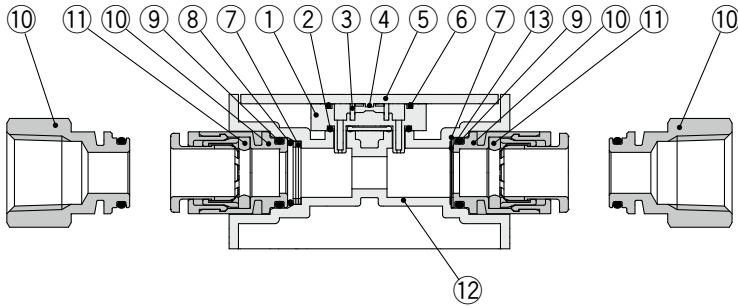

**Component Parts**

No.	Description	Material	Note
1	Sensor body	PPS	
2	Gasket	HNBR	
3	Flow rectifier	Stainless steel 304	
4	Sensor chip	Silicon	
5	Printed circuit board	GE4F	
6	Gasket	HNBR	
7	Flow rectifier	Stainless steel 304	
8	O-ring	FKM	Fluoro coating
9	O-ring	FKM	Fluoro coating
10	Fitting for piping	Brass	Electroless nickel plating
11	O-ring	FKM	Fluoro coating
12	Body	PBT	
13	Gasket	HNBR	
14	Bottom piping adapter	PBT	
15	O-ring	HNBR	Fluoro coating
16	Flow adjustment valve body	PBT	
17	Body	Brass	Electroless nickel plating
18	Needle	Brass	Electroless nickel plating
19	O-ring	HNBR	Fluoro coating
20	O-ring	HNBR	Fluoro coating

**PFMB7501/7102/7202**

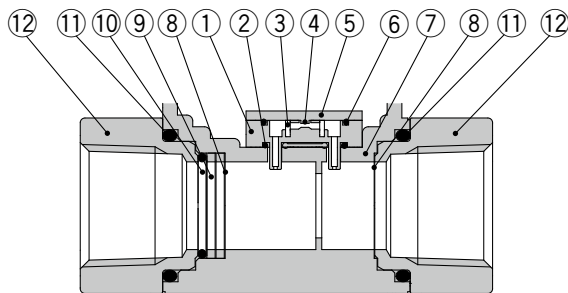

**Component Parts**

No.	Description	Material	Note
1	Sensor body	PPS	
2	Gasket	HNBR	
3	Flow rectifier	Stainless steel 304	
4	Sensor chip	Silicon	
5	Printed circuit board	GE4F	
6	Gasket	HNBR	
7	Body	PPS	
8	Mesh	Stainless steel 304	
9	Spacer	PPS	
10	O-ring	HNBR	
11	O-ring	HNBR	
12	Attachment	ADC	Coating

PFMB

PFGB300


Function Details




# PFMB7 Series

## Dimensions

### PFMB7201-C8

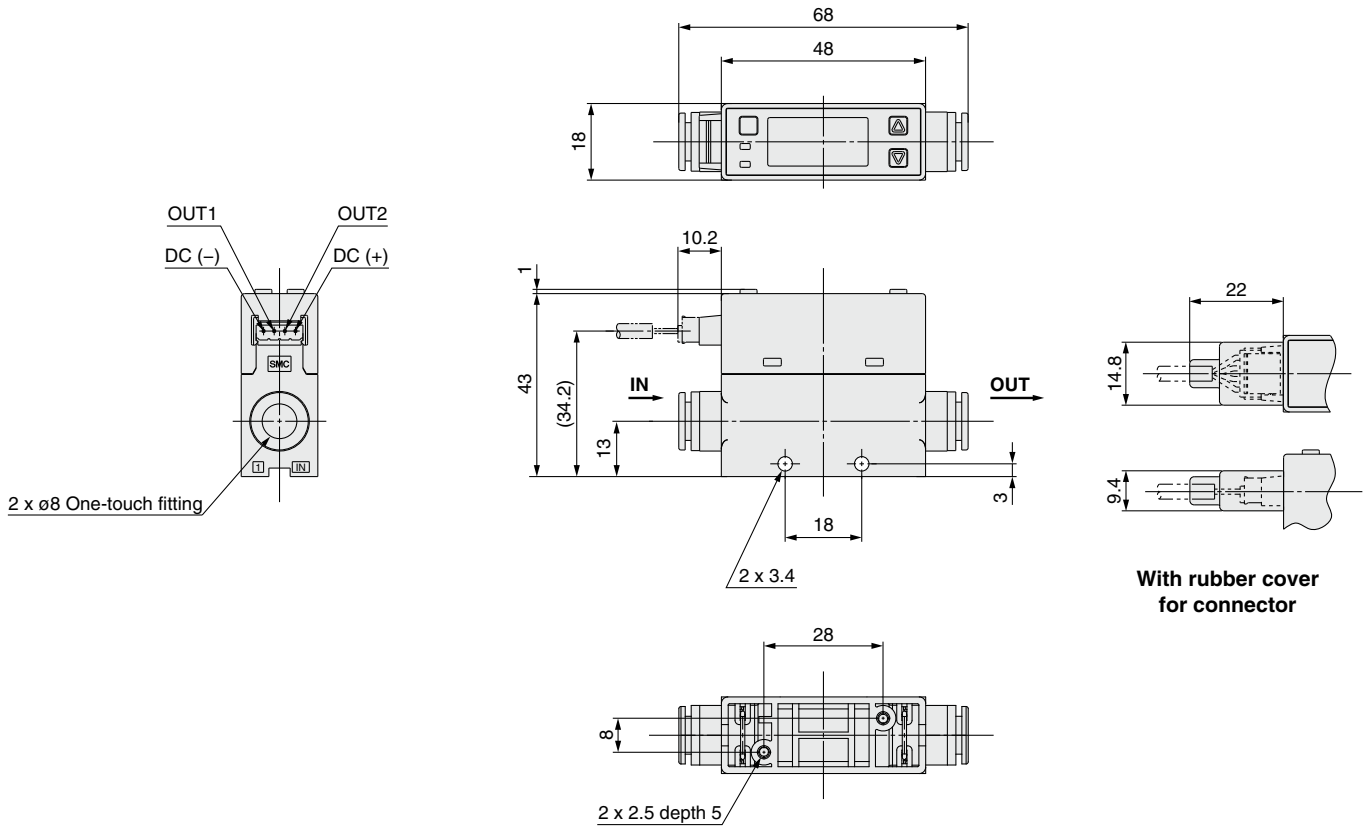


### PFMB7201-C8L

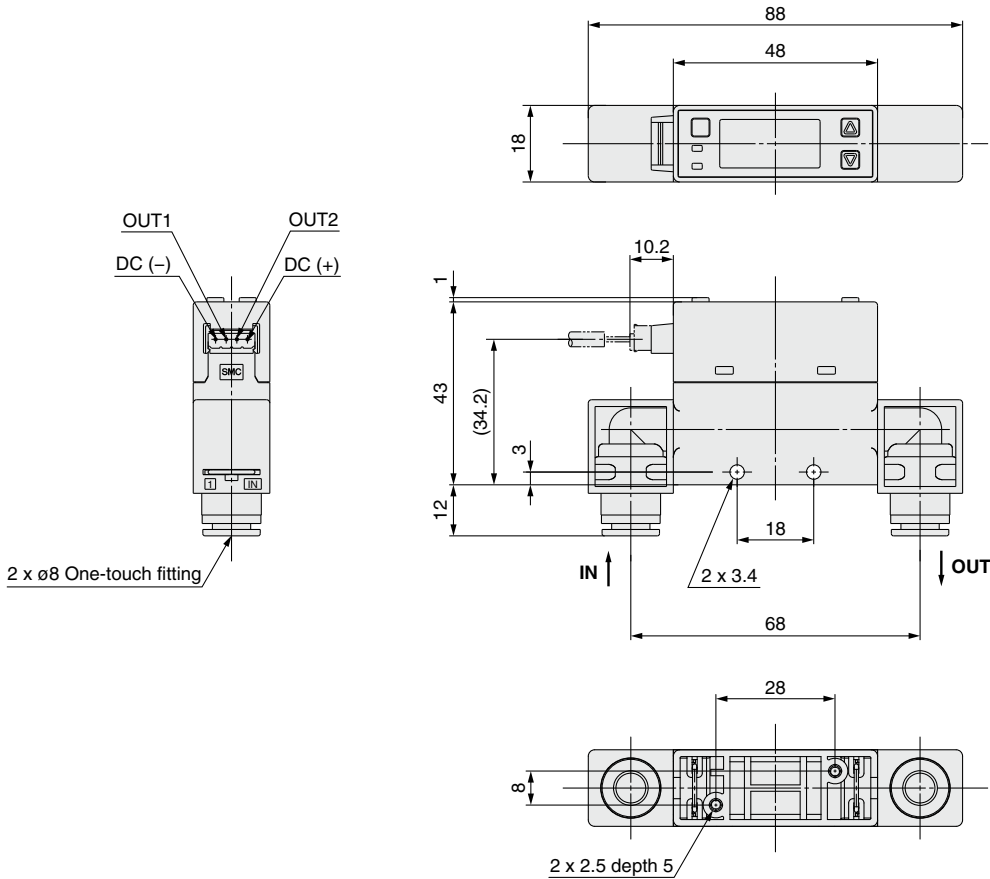


**Dimensions**

**PFMB7201-(N)02**

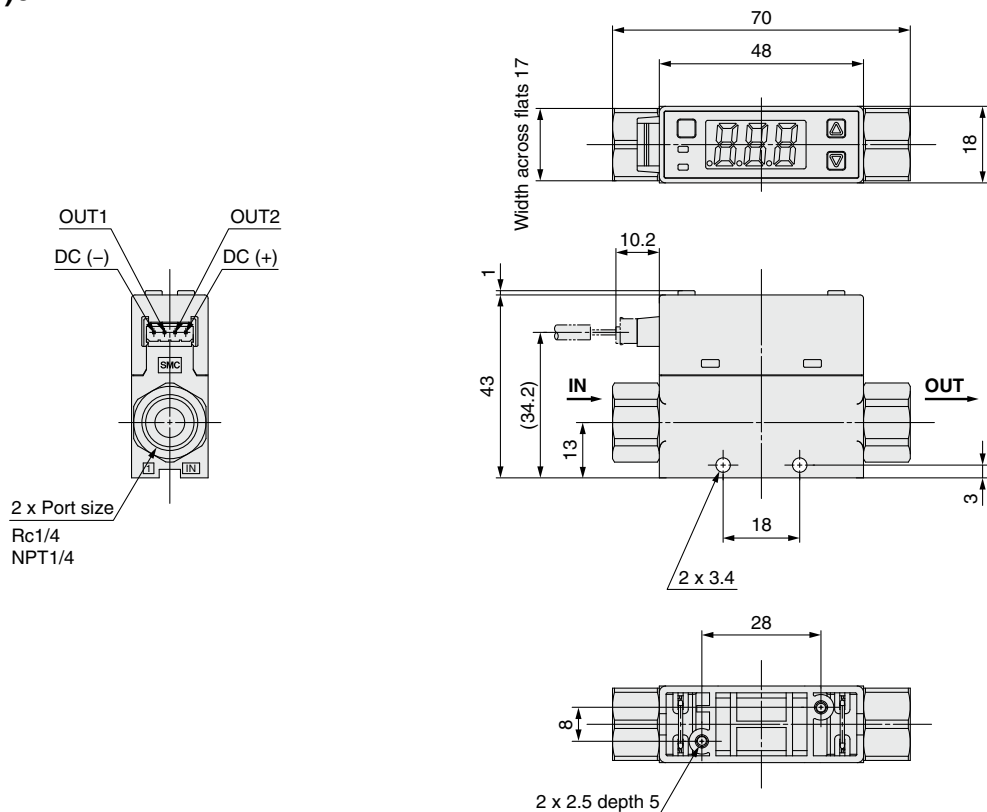

**PFMB7201-(N)02L**

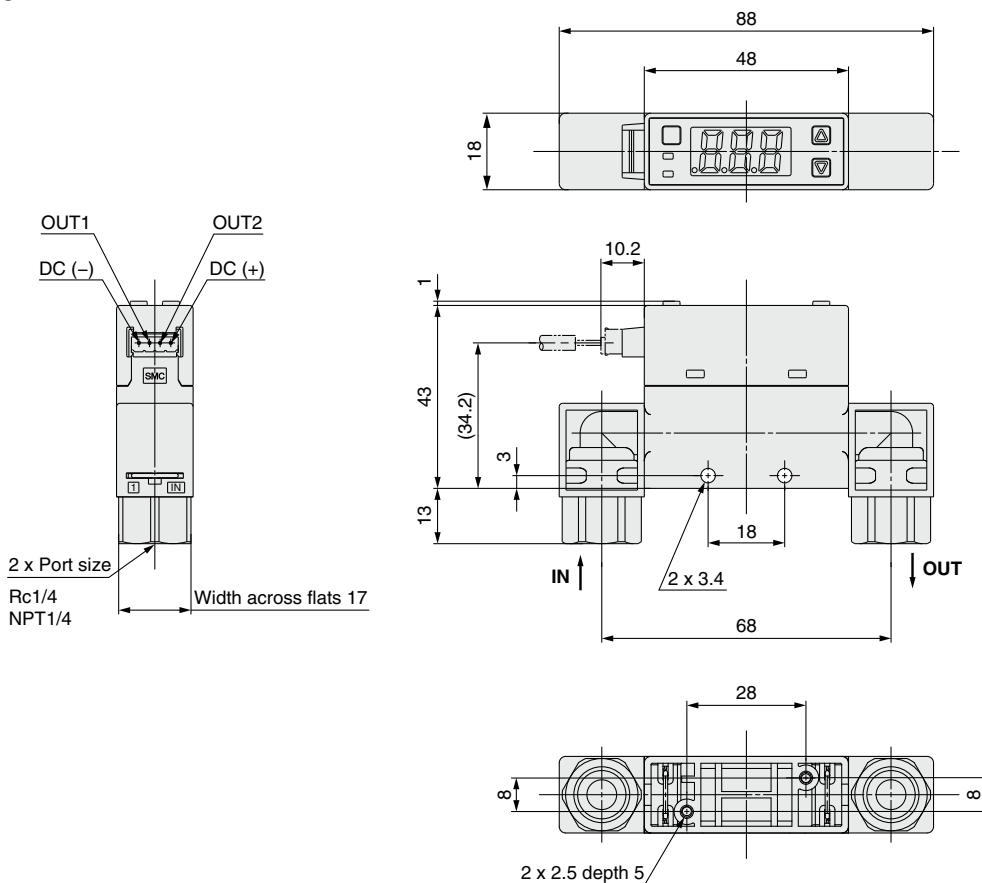

PFMB


PFGB300

Function Details


# PFMB7 Series

## Dimensions

### PFMB7201-F02

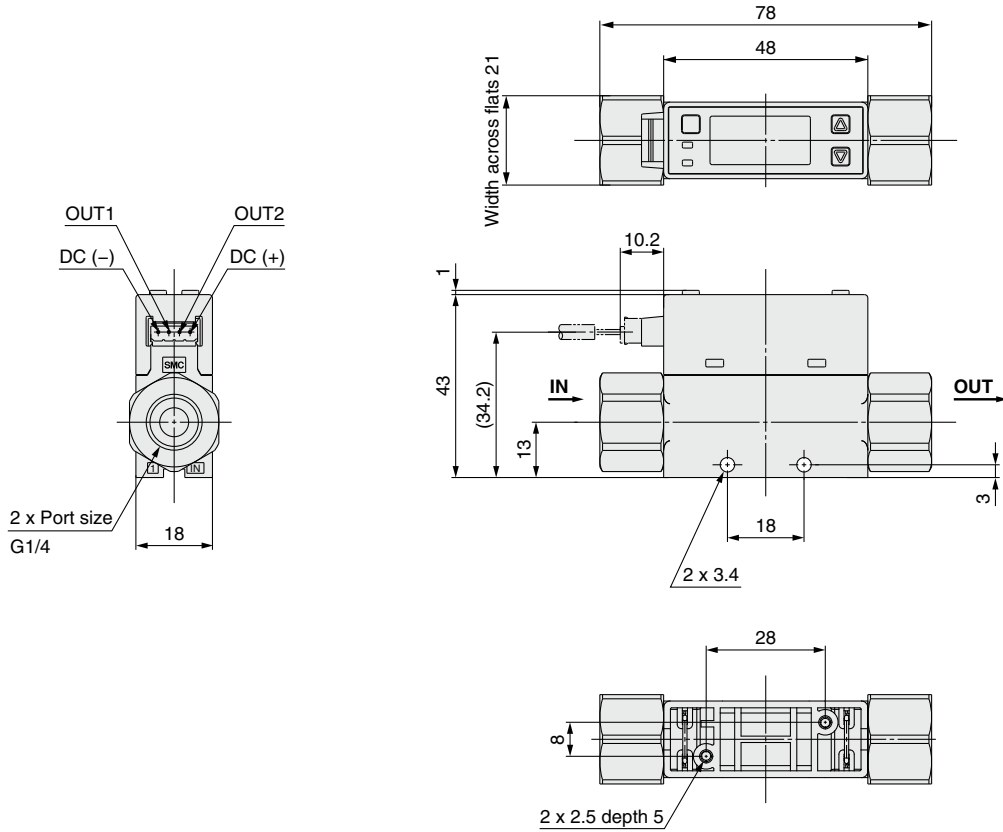


### PFMB7201-F02L

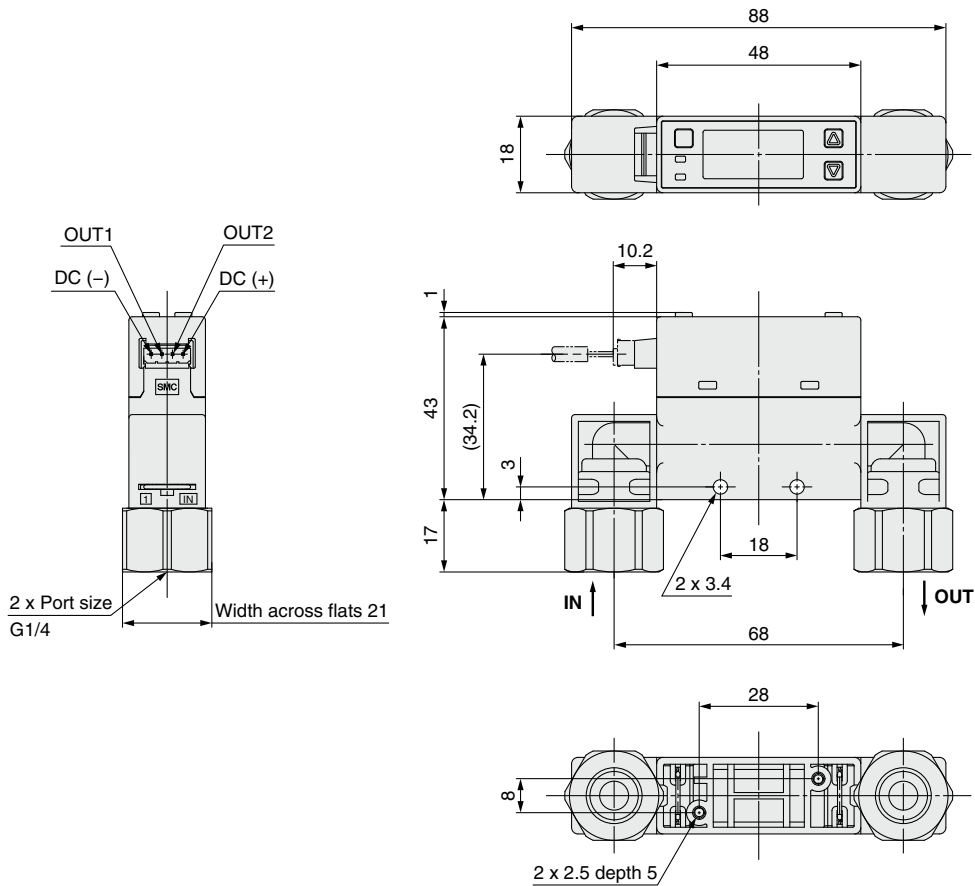


**Dimensions**

**PFMB7201S-C8**

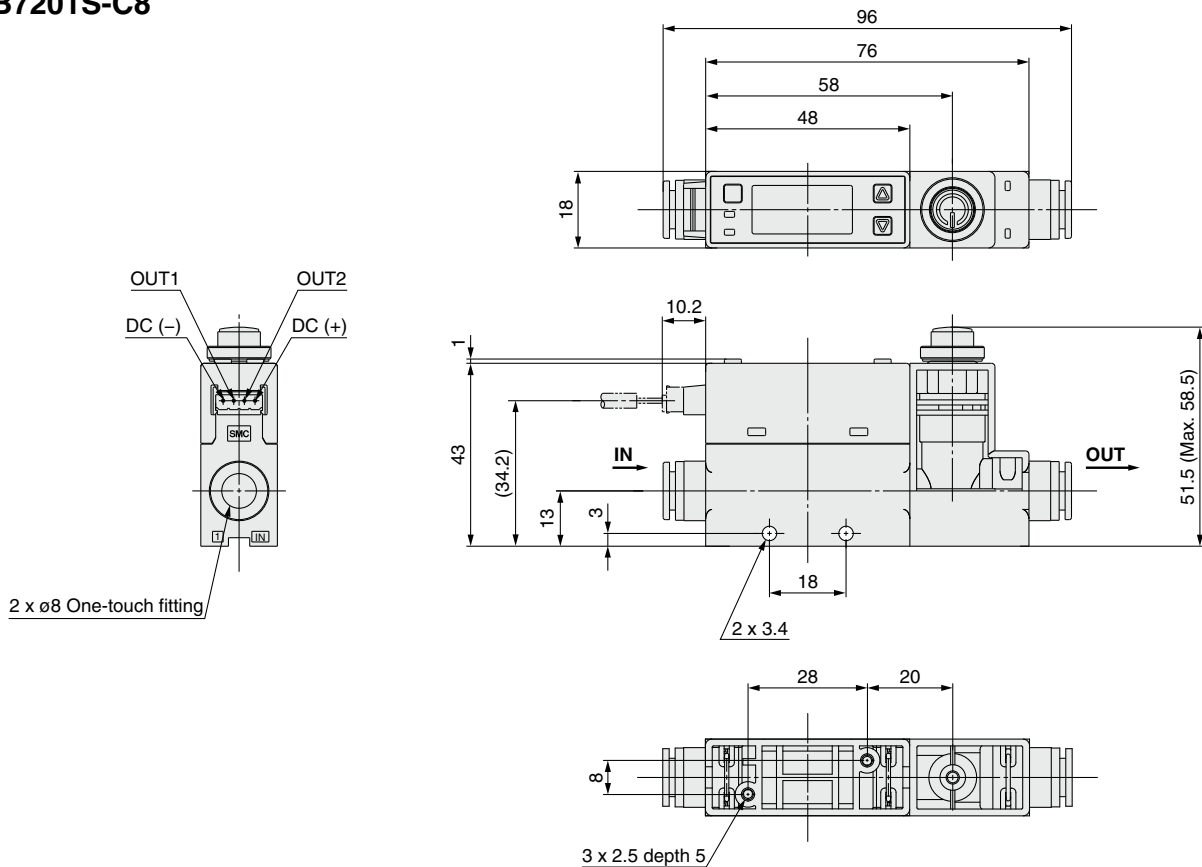


**PFMB7201S-C8L**

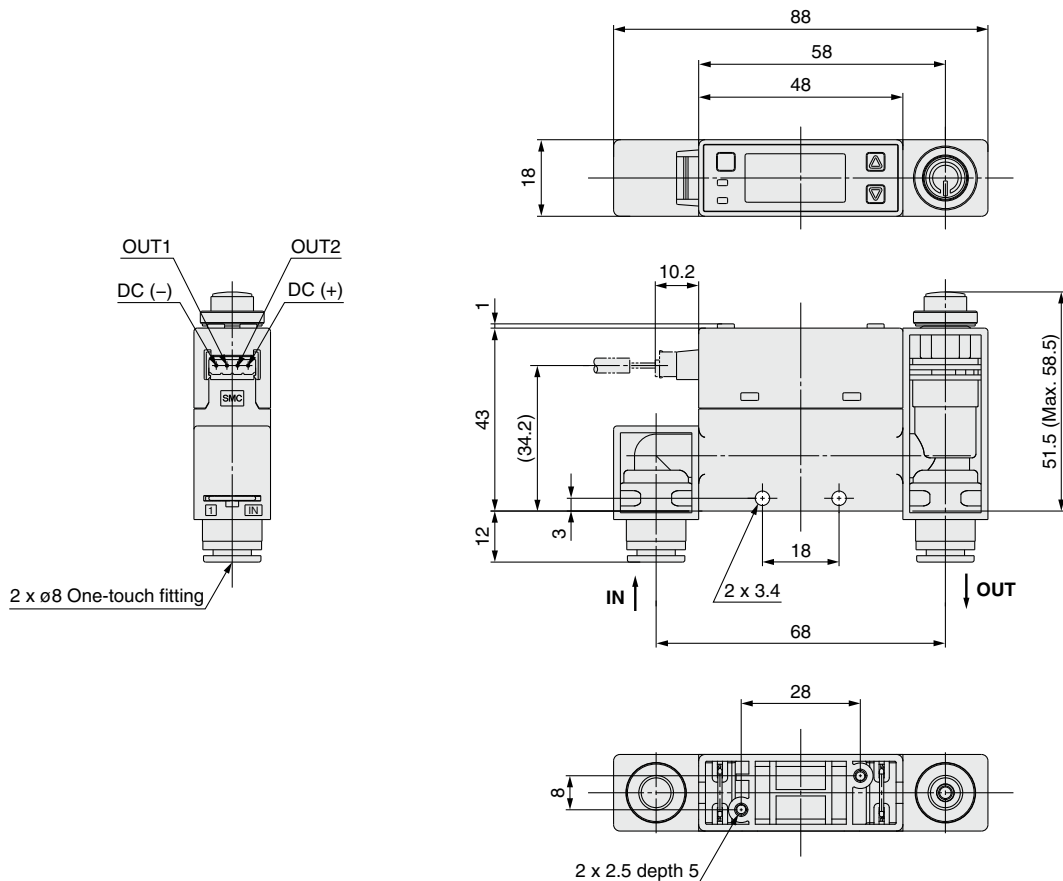


# PFMB7 Series

## Dimensions

### PFMB7201S-(N)02

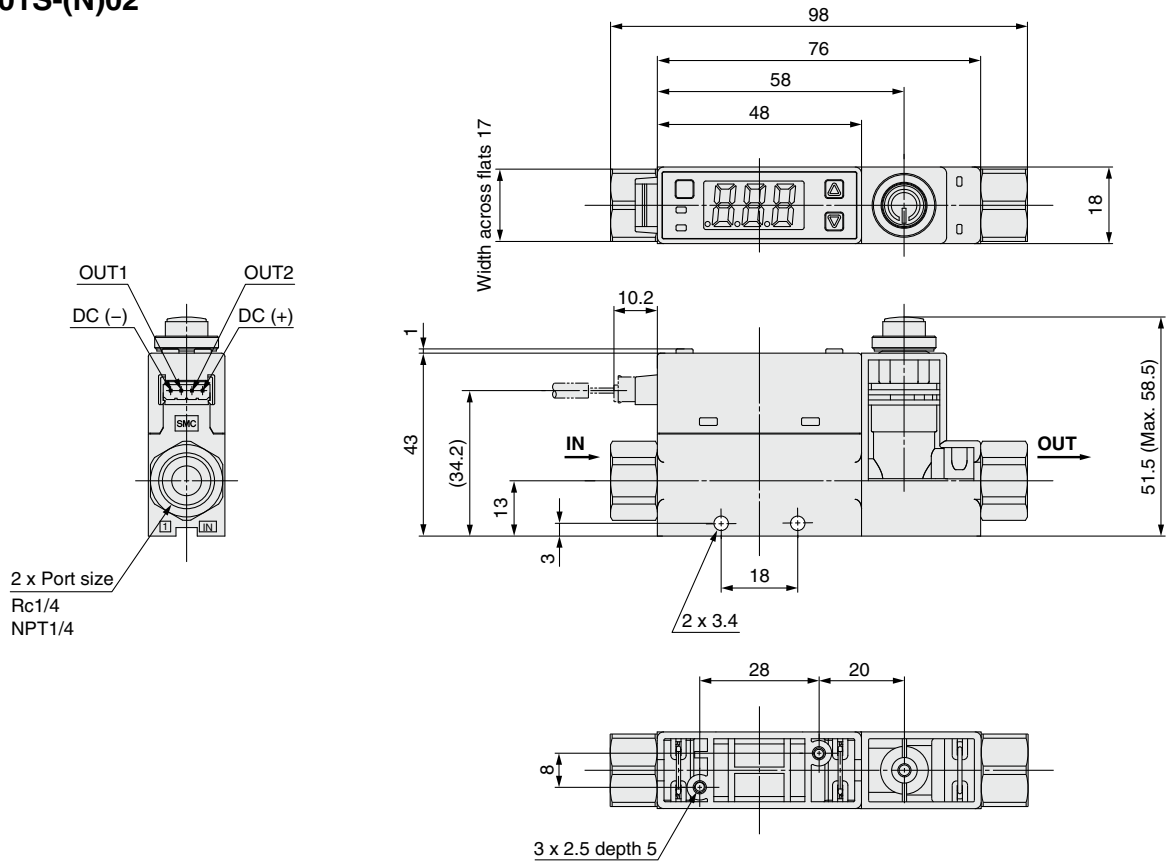


### PFMB7201S-(N)02L

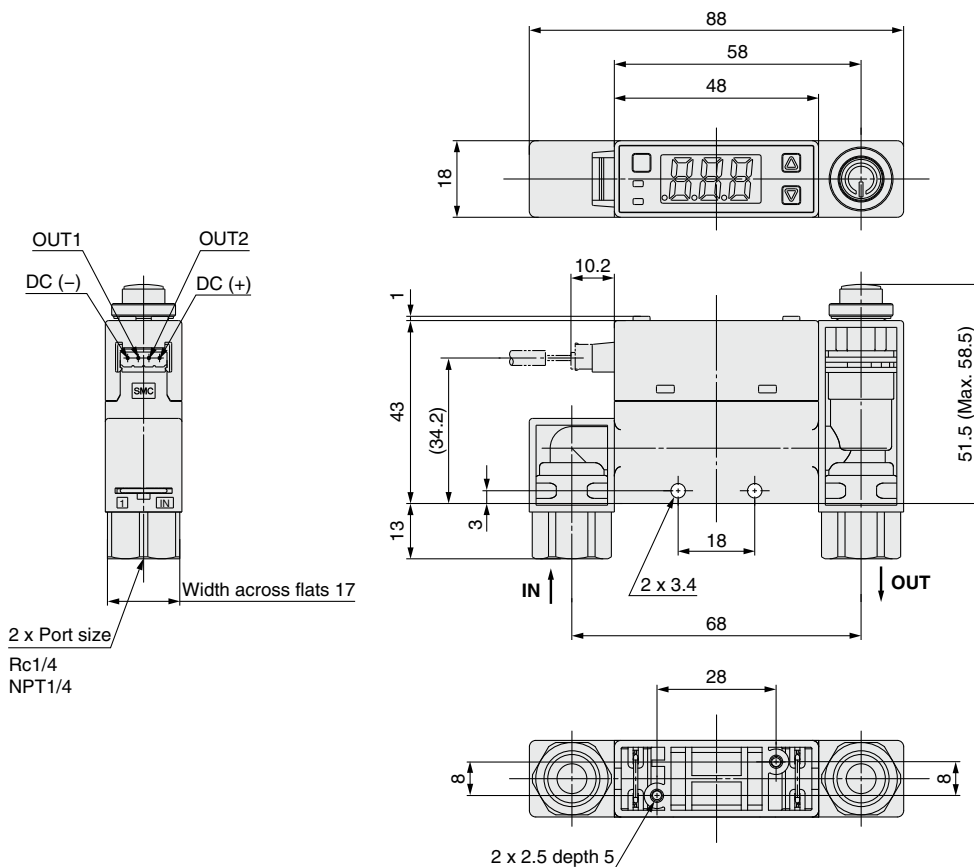


**Dimensions**

**PFMB7201S-F02**

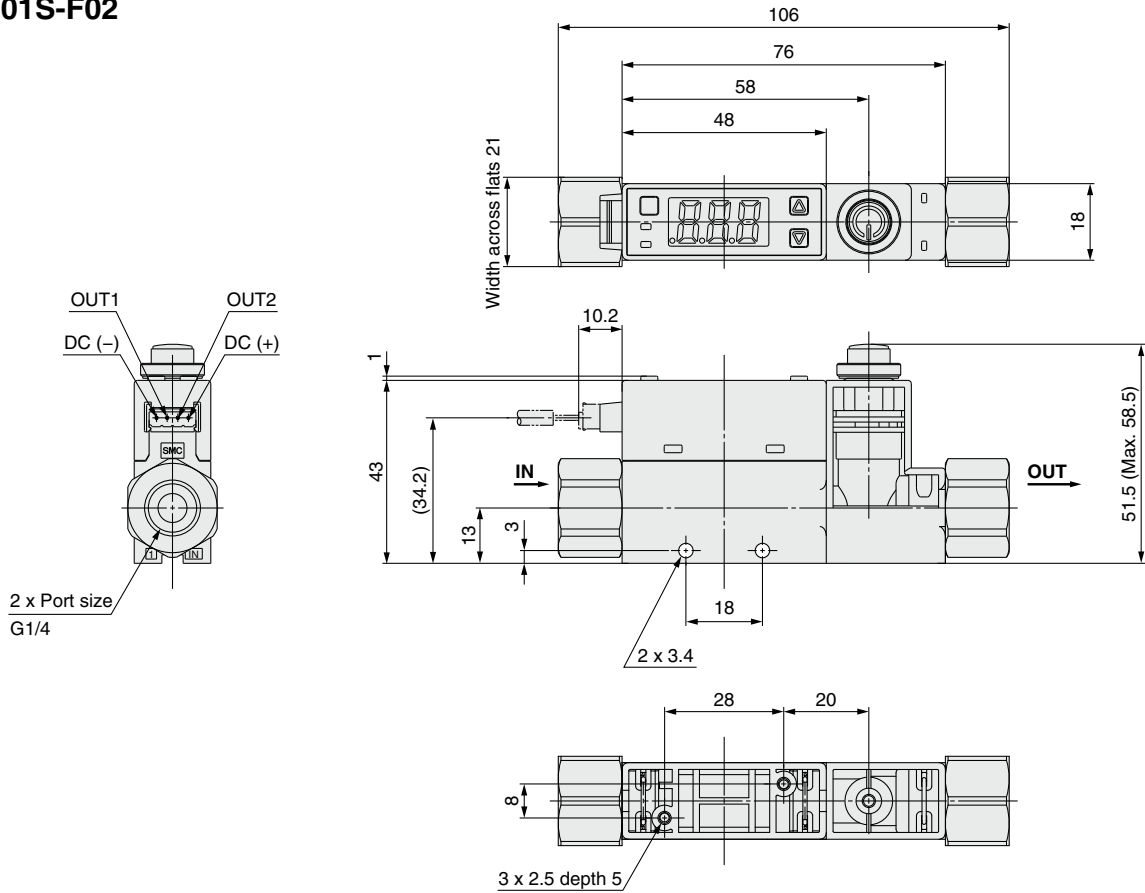

**PFMB7201S-F02L**

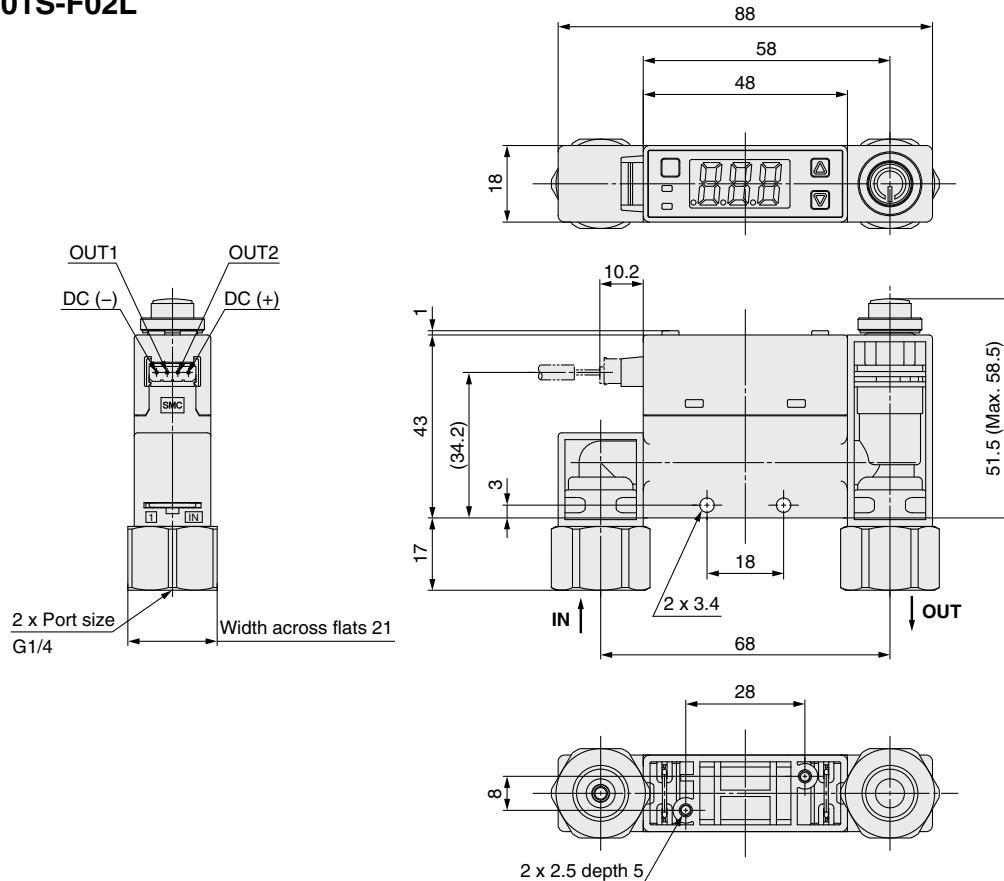

PFMB

PFGB300

Function Details




# PFMB7 Series


## Dimensions

### PFMB7201


Panel mount/  
Without flow adjustment valve/Straight

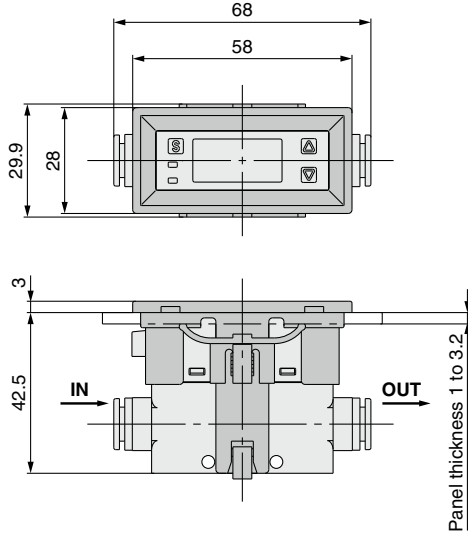

Panel mount/  
Without flow adjustment valve/Bottom

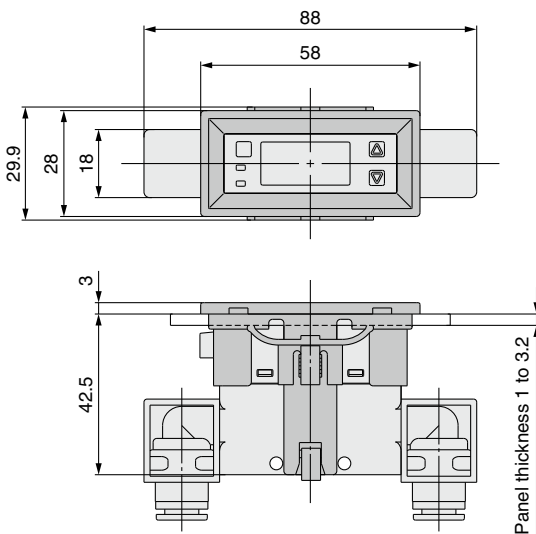


### Panel Fitting Dimensions

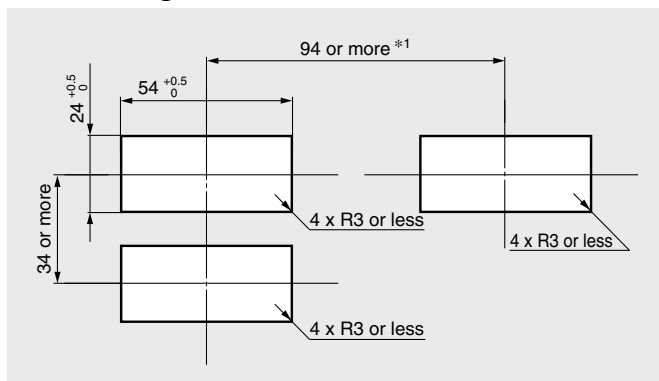


Panel thickness 1 to 3.2 mm

\*1 Piping entry direction: Minimum dimensions for bottom piping. If using straight piping, the piping material and tubing need to be taken into consideration when designing the system. If a bend (R) is used, limit it to R3 or less.


Panel mount/  
With flow adjustment valve/Straight

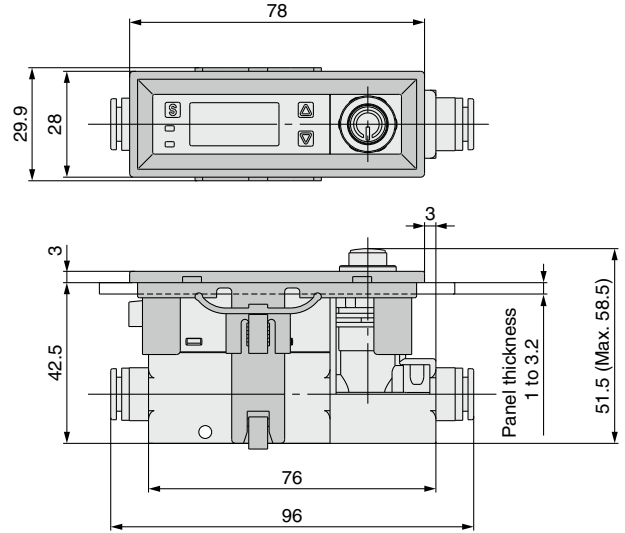

Panel mount/  
With flow adjustment valve/Bottom

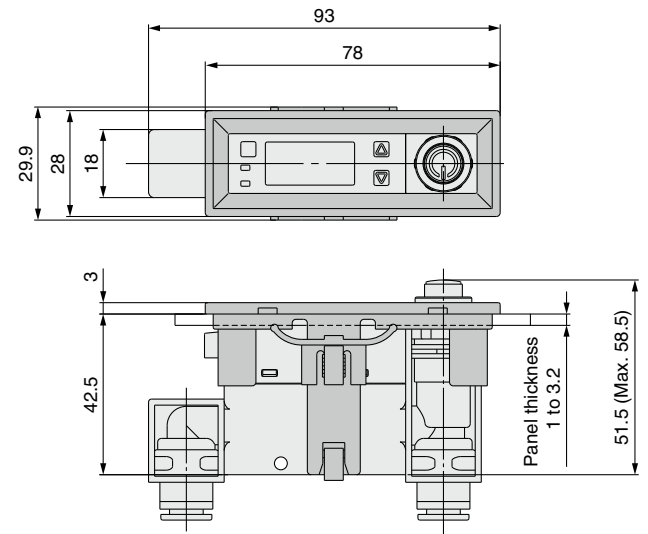

### Panel Fitting Dimensions

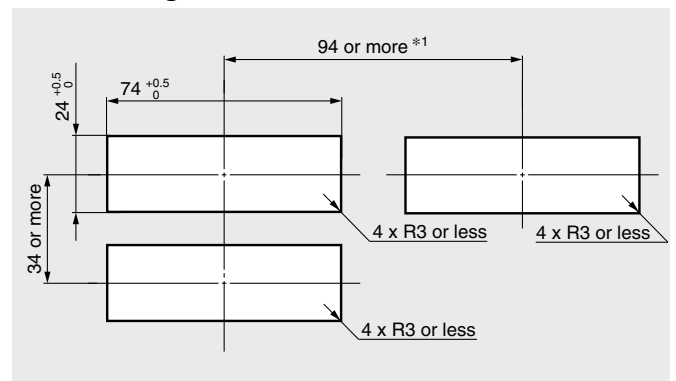


Panel thickness 1 to 3.2 mm

\*1 Piping entry direction: Minimum dimensions for bottom piping. If using straight piping, the piping material and tubing need to be taken into consideration when designing the system. If a bend (R) is used, limit it to R3 or less.


## Dimensions

### PFMB7201


With bracket/Without flow adjustment valve

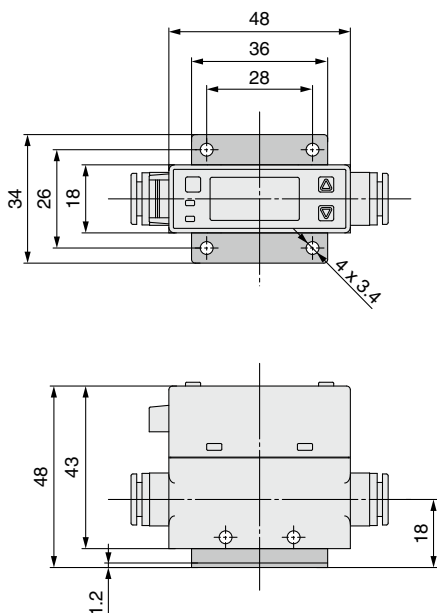

With bracket/With flow adjustment valve

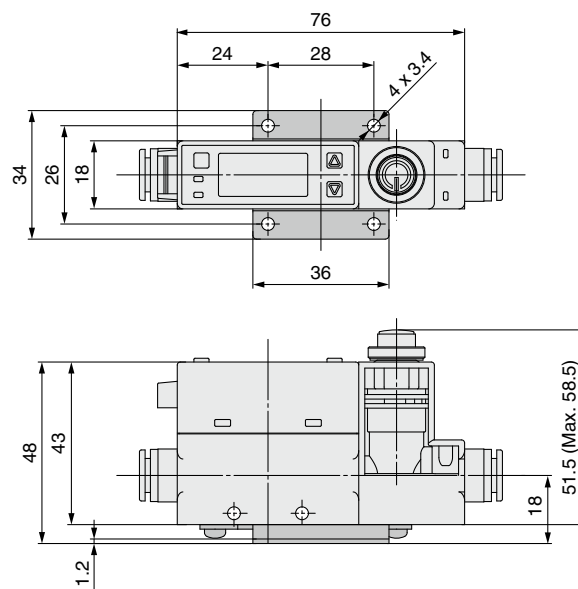

### DIN rail mounting

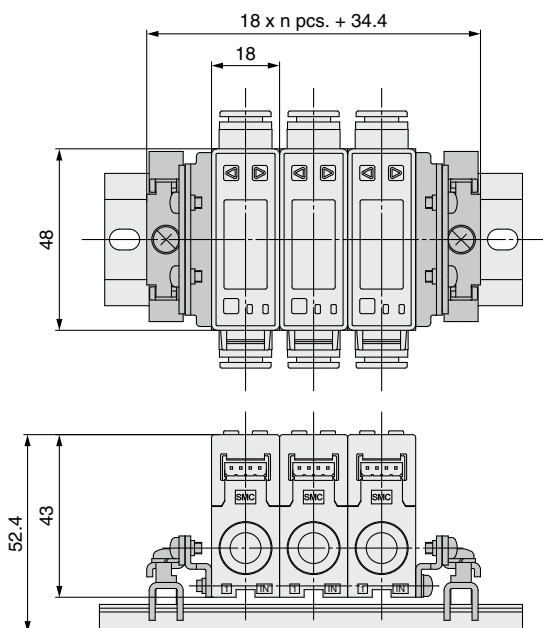

- The DIN rail should be provided by the customer.
- The DIN rail is not suitable for port size F02 (G1/4).

PFMB


PFGB300

Function  
Details

# PFMB7 Series

## Dimensions


### PFMB7501/7102/7202

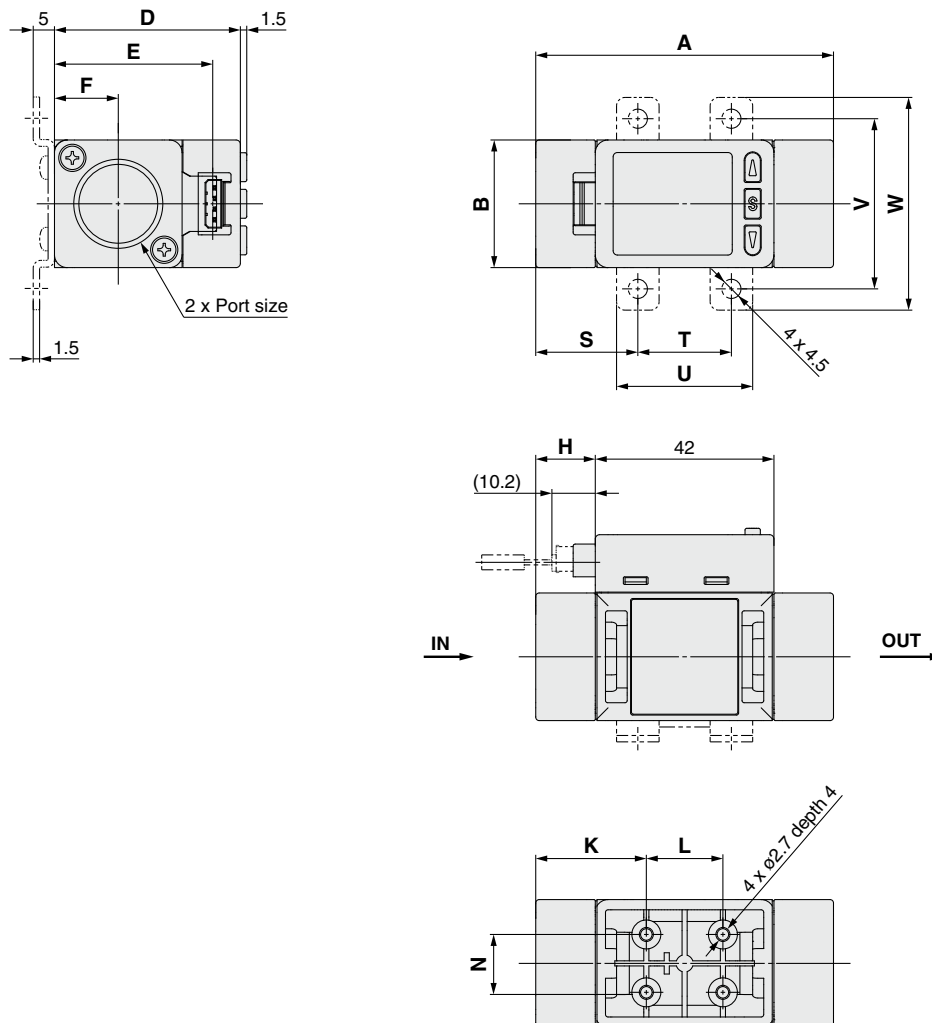

Model	Symbol	A	B	D	E	F	H	K	L	N
PFMB7501/7102		70	30	43.7	37.2	15	14	26	18	13.6
PFMB7202		90	35	49.2	42.7	17.5	24	31	28	16.8

Model	Symbol	Bracket dimensions				
		S	T	U	V	W
PFMB7501/7102		24	22	32	40	50
PFMB7202		30	30	42	48	58

### Lead wire with connector (Part no.: ZS-33-D)

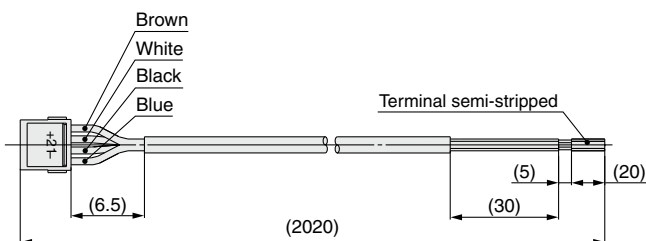

### Cable Specifications

Conductor	Nominal cross section	AWG26
	Outside diameter	Approx. 0.50 mm
Insulator	Outside diameter	Approx. 1.00 mm
	Color	Brown, White, Black, Blue
Sheath	Material	Oil-resistant PVC
Finished outside diameter		ø3.5

\* For wiring, refer to the "Operation Manual" on the SMC website.  
Documents/Download --> Instruction Manuals

# 3-Screen Display

# Digital Flow Monitor

# PFG300 Series



PFMB

PFG300

Function Details

## How to Order

PFG 3 0 0 - RT - M - L [ ] [ ] [ ]

### Type

3 Remote type monitor unit

### Input specification

Symbol	Description	Applicable flow switch model
0	Voltage input	PFMB7□-C/E series
1	Current input	PFMB7□-D/F series

### Output specification

RT	2 outputs (NPN/PNP switching type) + Analog voltage output*1, 2
SV	2 outputs (NPN/PNP switching type) + Analog current output*2
XY	2 outputs (NPN/PNP switching type) + Copy function

\*1 Can switch between 1 to 5 V and 0 to 10 V

\*2 Can be switched to external input or copy function

### Unit specification

Nil	Units selection function*3
M	SI unit only*4


\*3 This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

\*4 Fixed unit: Instantaneous flow: L/min  
Accumulated flow: L


### Option 4

	Operation manual	Calibration certificate
Nil	○	—
Y	—	○
K	○	○
T	—	○





### Option 3

Nil	None
F	ZS-28-C-1 

### Option 1

Symbol	Description
Nil	Without lead wire
L	Power supply/output connection lead wire (Lead wire length: 2 m) 

### Option 2


Symbol	Description
Nil	None
A1	Bracket A (Vertical mounting)  ZS-46-A1
A2	Bracket B (Horizontal mounting)  ZS-46-A2
B	Panel mount adapter  ZS-46-B
D	Panel mount adapter + Front protection cover  ZS-46-D

### Options/Part Nos.

When only optional parts are required, order with the part numbers listed below.

Part no.	Option	Note
ZS-28-C-1	Sensor connector	For PFMB
ZS-46-A1	Bracket A	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
ZS-46-A2	Bracket B	Tapping screw: Nominal size 3 x 8 L (2 pcs.)
ZS-46-B	Panel mount adapter	
ZS-46-D	Panel mount adapter + Front protection cover	
ZS-46-5L	Power supply/output connection lead wire	5-core, 2 m
ZS-27-01	Front protection cover	

### Connection Example

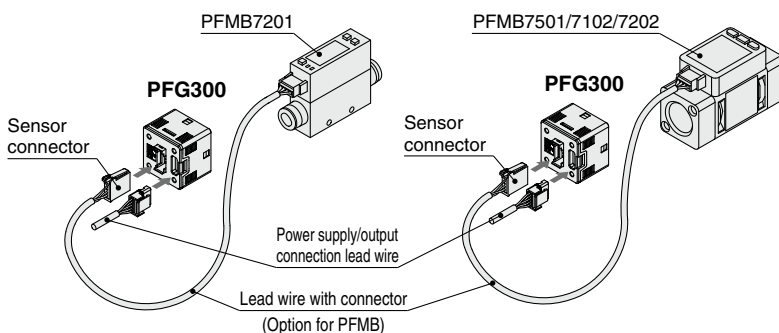

# PFG300 Series

For flow switch precautions and specific product precautions, refer to the "Operation Manual" on the SMC website. Click [here](#) for details.

## Specifications

Model		PFG300 series				
Applicable SMC flow switch	Model	PFMB7201	PFMB7501	PFMB7102	PFMB7202	
	Rated flow range*1	2 to 200 L/min	5 to 500 L/min	10 to 1000 L/min	20 to 2000 L/min	
Flow	Set point range	Instantaneous flow	-10 to 210 L/min	-25 to 525 L/min	-50 to 1050 L/min	-100 to 2100 L/min
		Accumulated flow	0 to 999,999,999,999 L	0 to 999,999,999,990 L		
	Smallest settable increment	Instantaneous flow	1 L/min			
		Accumulated flow	1 L	10 L		
	Accumulated volume per pulse (Pulse width = 50 ms)	1 L/pulse			10 L/pulse	
Accumulated value hold function*3	Intervals of 2 or 5 minutes can be selected. The stored accumulated flow is held even when the power supply is OFF.					
Electrical	Power supply voltage	12 to 24 VDC ±10%				
	Current consumption	25 mA or less				
	Protection	Polarity protection				
Accuracy	Display accuracy	±0.5% F.S. ± Minimum display unit (Ambient temperature of 25°C)				
	Analog output accuracy	±0.5% F.S. (Ambient temperature of 25°C)				
	Repeatability	±0.1% F.S. ±1 digit				
	Temperature characteristics	±0.5% F.S. (Ambient temperature: 0 to 50°C, 25°C standard)				
Switch output	Output type	Select from NPN or PNP open collector output.				
	Output mode	Select from Hysteresis, Window comparator, Accumulated output, Accumulated pulse output, Error output, or Switch output OFF modes.				
	Switch operation	Select from Normal or Reversed output.				
	Max. load current	80 mA				
	Max. applied voltage (NPN only)	30 VDC				
	Internal voltage drop (Residual voltage)	NPN output: 1 V or less (at load current of 80 mA), PNP output: 1.5 V or less (at load current of 80 mA)				
	Response time*2	3 ms or less				
	Delay time*2	Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, 30 s, 40 s, 50 s, or 60 s				
	Hysteresis*4	Variable from 0				
Protection	Short circuit protection					
Analog output*5	Output type	Voltage output: 1 to 5 V, 0 to 10 V (only when the power supply voltage is 24 VDC) Current output: 4 to 20 mA (0 L/min to maximum value of the rated flow)				
	Impedance	Voltage output	Output impedance: 1 kΩ			
		Current output	Maximum load impedance: 300 Ω (at power supply voltage of 12 V), 600 Ω (at power supply voltage of 24 VDC)			
Response time*2	50 ms or less					
External input*6	External input	Input voltage: 0.4 V or less (Reed or Solid state) for 30 ms or longer				
	Input mode	Select from Accumulated value external reset or Peak/Bottom value reset.				
Sensor input	Input type	Voltage input: 1 to 5 VDC (Input impedance: 1 MΩ), Current input: 4 to 20 mA DC (Input impedance: 51 Ω) (0 L/min to maximum value of the rated flow)				
	Connection method	Connector (e-CON)				
	Protection	Over voltage protection (Up to 26.4 VDC)				
Display	Display mode	Select from Instantaneous flow or Accumulated flow.				
	Unit*7	Instantaneous flow	L/min, cfm (ft <sup>3</sup> /min)			
		Accumulated flow	L, ft <sup>3</sup> , L x 10 <sup>6</sup> , ft <sup>3</sup> x 10 <sup>6</sup>			
	Display range	Instantaneous flow	-10 to 210 L/min	-25 to 525 L/min	-50 to 1050 L/min	-100 to 2100 L/min
		Accumulated flow*9	0 to 999,999,999,999 L	0 to 999,999,999,990 L		
	Minimum display unit	Instantaneous flow	1 L/min			
		Accumulated flow	1 L	10 L		
	Display type	LCD				
	Number of displays	3-screen display (Main screen, Sub screen)				
Display color	1) Main screen: Red/Green, 2) Sub screen: Orange					
Number of display digits	1) Main screen: 5 digits (7 segments), 2) Sub screen: 9 digits (7 segments)					
Indicator LED	LED ON when switch output is ON OUT1/2: Orange					
Digital filter*8	Select from 0.00, 0.05 to 0.1 s (increment of 0.01 s), 0.1 to 1.0 s (increment of 0.1 s), 1 to 10 s (increment of 1 s), 20 s, or 30 s					
Environment	Enclosure	IP40				
	Withstand voltage	1000 VAC for 1 minute between terminals and housing				
	Insulation resistance	50 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing				
	Operating temperature range	Operating: 0 to 50°C, Stored: -10 to 60°C (No condensation or freezing)				
Standards	Operating/Stored: 35 to 85% RH (No condensation or freezing)					
Weight	Body	CE marking (EMC directive/RoHS directive)				
	Lead wire with connector	25 g (Excluding the power supply/output connection lead wire) +39 g				

\*1 Rated flow range of the applicable flow switch

\*2 Value without digital filter (at 0.00 s)

\*3 When using the accumulated value hold function, use the operating conditions to calculate the product life, and do not exceed it. The maximum access limit of the memory device is 1.5 million times. If the product is operated 24 hours per day, the product life will be as follows:

• 5 min interval: life is calculated as 5 min x 1.5 million = 7.5 million min = 14.3 years

• 2 min interval: life is calculated as 2 min x 1.5 million = 3 million min = 5.7 years

If the accumulated value external reset is repeatedly used, the product life will be shorter than the calculated life.

\*4 If the flow fluctuates around the set value, the width for setting more than the fluctuating width needs to be set. Otherwise, chattering will occur.

\*5 Setting is only possible for models with analog output.

\*6 Setting is only possible for models with external input.

\*7 Setting is only possible for models with the units selection function.


\*8 The response time indicates when the set value is 90% in relation to the step input.

\*9 The accumulated flow display is the upper 6-digit and lower 6-digit (total of 12 digits) display. When the upper digits are displayed, x 10<sup>6</sup> lights up.


\* Products with tiny scratches, marks, or display color or brightness variations which do not affect the performance of the product are verified as conforming products.

### Internal Circuits and Wiring Examples


**-XY**  
**-RT**  
**-SV**  
**NPN (2 outputs) + Copy function**

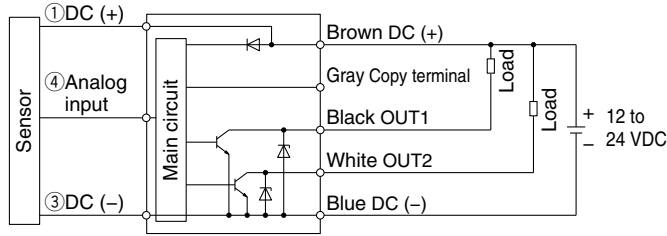


**-XY**  
**-RT**  
**-SV**  
**PNP (2 outputs) + Copy function**

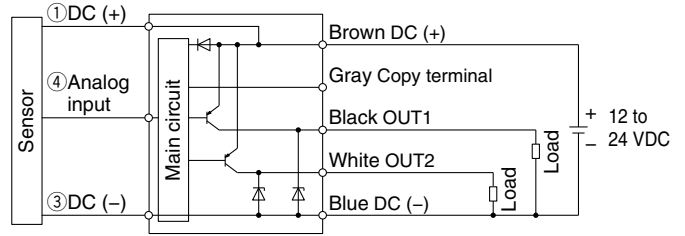


**-RT: NPN (2 outputs) + Analog voltage output**  
**-SV: NPN (2 outputs) + Analog current output**

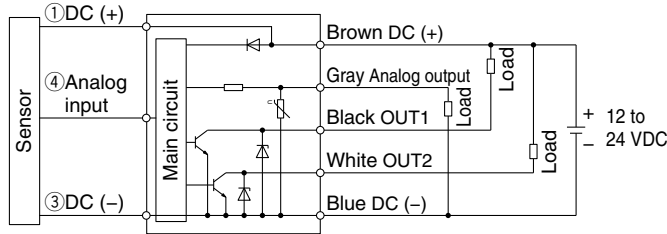


**-RT: PNP (2 outputs) + Analog voltage output**  
**-SV: PNP (2 outputs) + Analog current output**

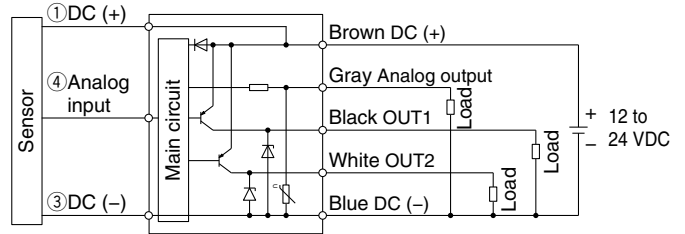

**-RT: NPN (2 outputs) + External input**  
**-SV: NPN (2 outputs) + External input**

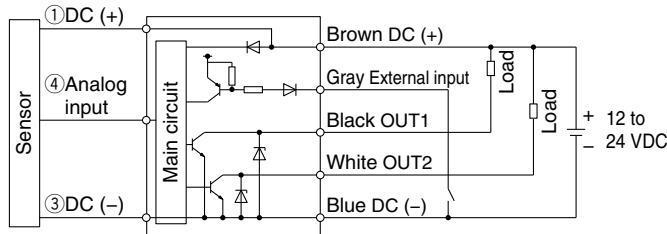


**-RT: PNP (2 outputs) + External input**  
**-SV: PNP (2 outputs) + External input**



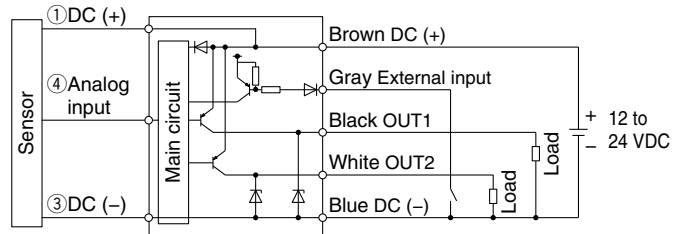


### Accumulated pulse output wiring examples

**NPN (2 outputs) type**

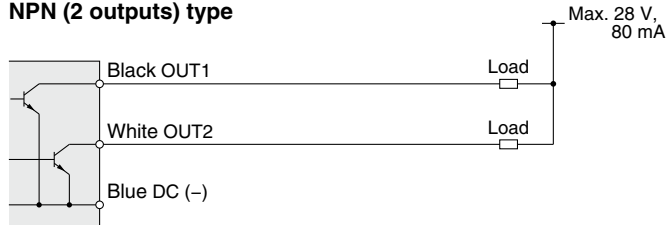

**PNP (2 outputs) type**

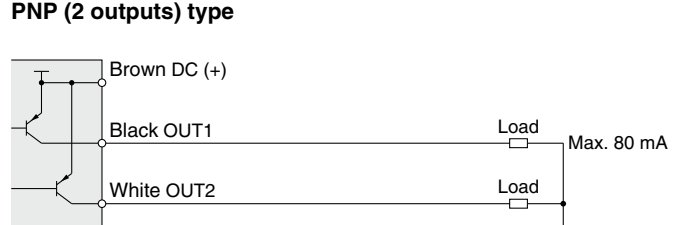


PFMB

PFG300


Function Details

# PFG300 Series

## Dimensions

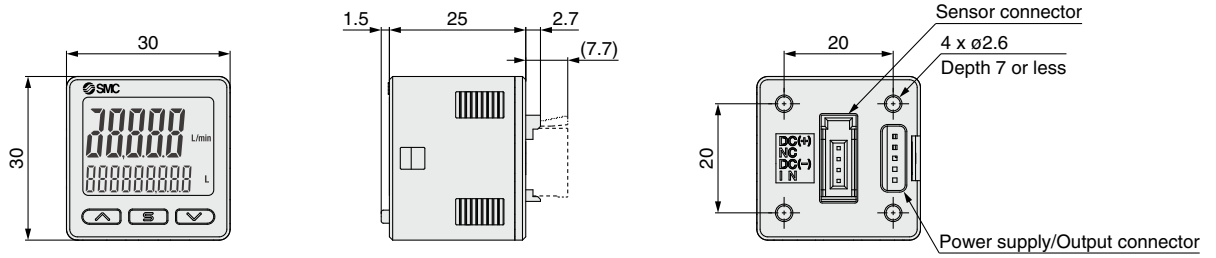


### Bracket A (Part no.: ZS-46-A1)

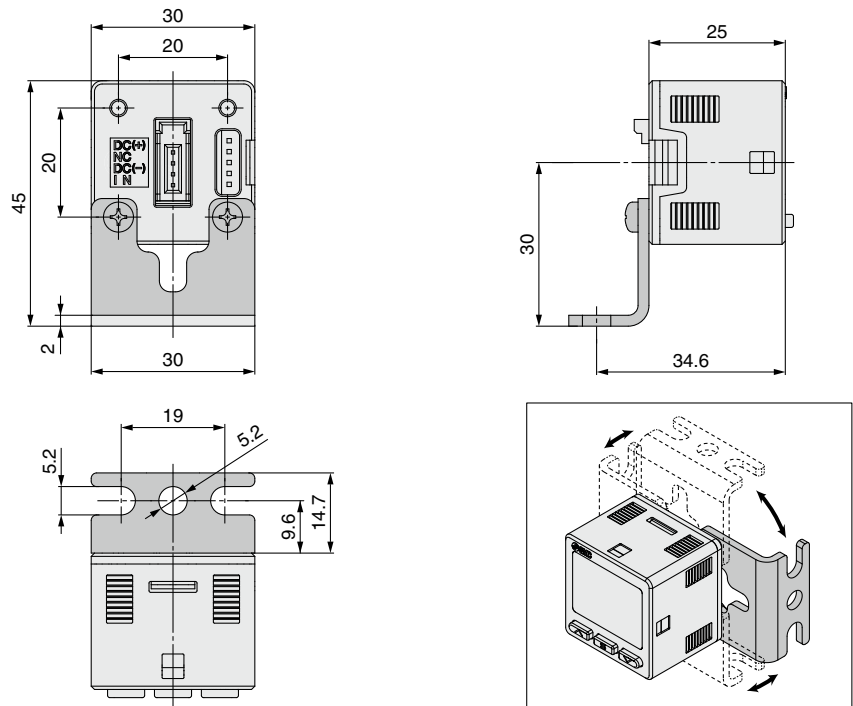

\* Bracket configuration allows for mounting in four orientations.

### Bracket B (Part no.: ZS-46-A2)

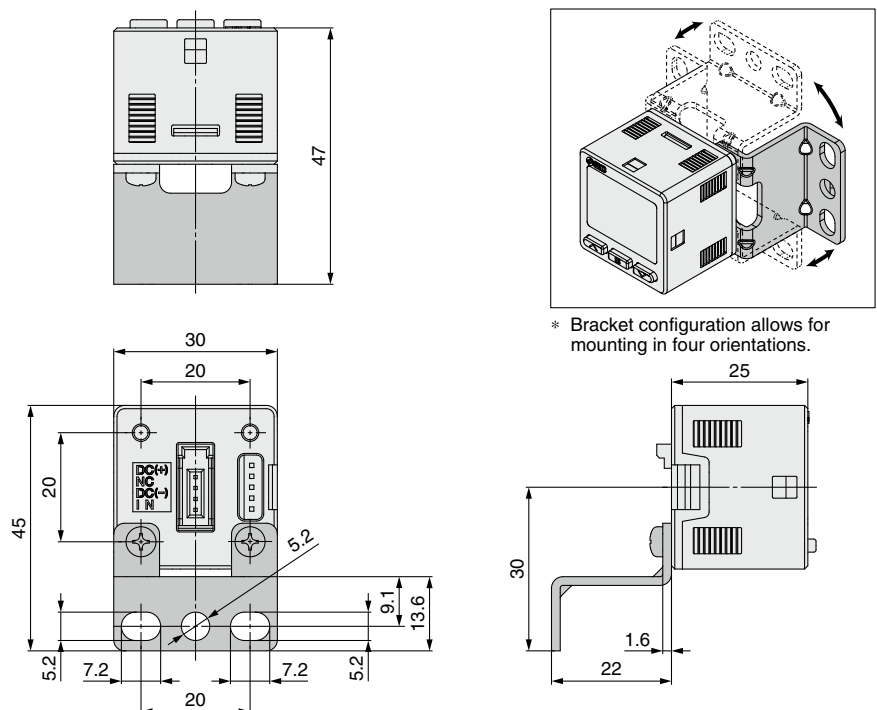


\* Bracket configuration allows for mounting in four orientations.




**Dimensions**


**Panel mount adapter  
(Part no.: ZS-46-B)**

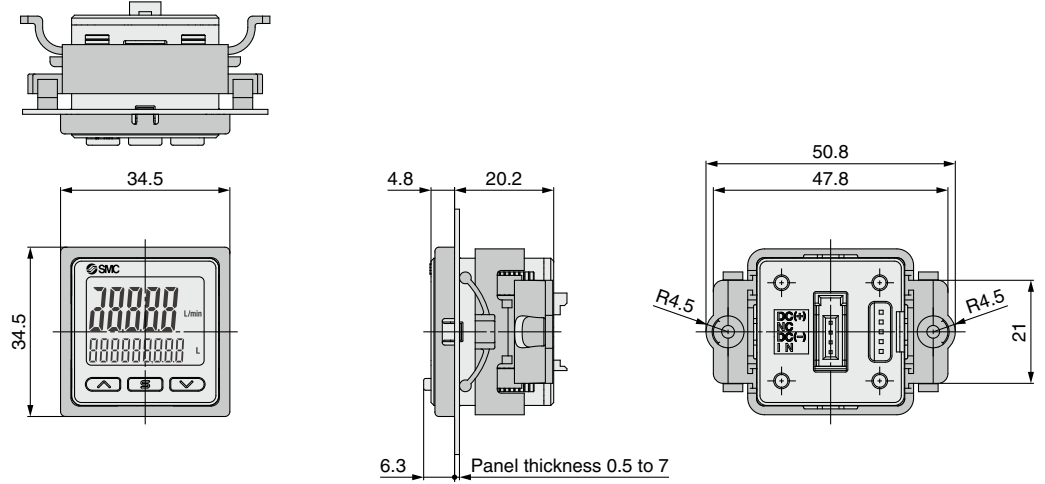

**Panel mount adapter + Front protection cover  
(Part no.: ZS-46-D)**

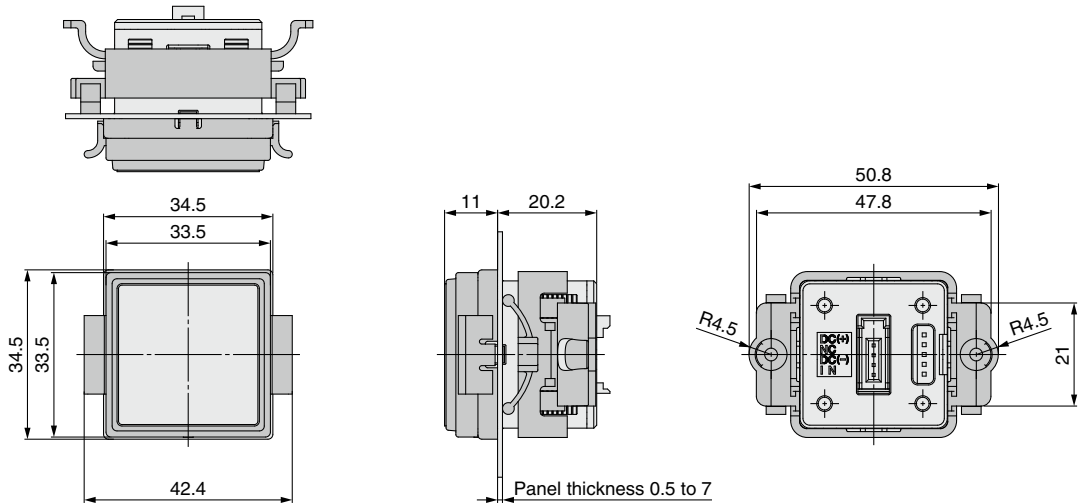


**Power supply/output connection lead wire  
(Part no.: ZS-46-5L)**

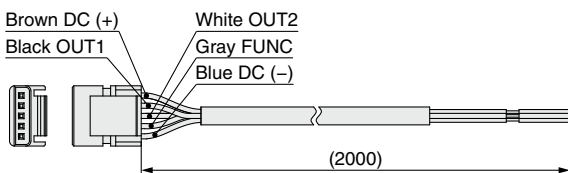

**Sensor connector  
(Part no.: ZS-28-C-1)**

Pin no.	Terminal
1	DC (+)
2	N.C.
3	DC (-)
4	IN*1

\*1 1 to 5 V or 4 to 20 mA



**Cable Specifications**


<b>Conductor cross section</b>	0.15 mm <sup>2</sup> (AWG26)	
<b>Insulator</b>	<b>Outside diameter</b>	1.0 mm
	<b>Color</b>	Brown, Blue, Black, White, Gray (5-core)
<b>Sheath</b>	<b>Finished outside diameter</b>	ø3.5

# PFG300 Series


## Dimensions

### Panel fitting dimensions


#### Individual mounting




#### Multiple (2 pcs. or more) secure mounting <Horizontal>

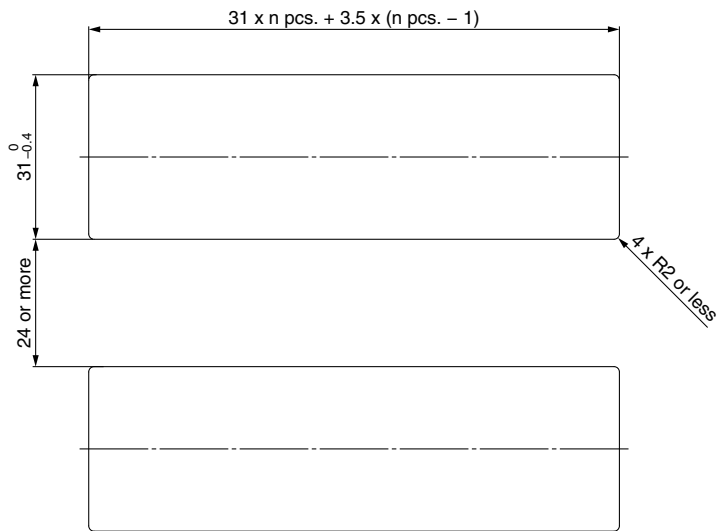


#### Panel mount example <Horizontal>

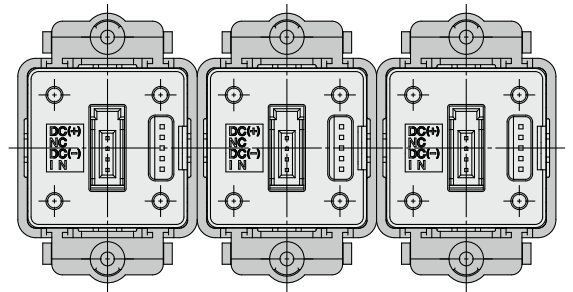

#### <Vertical>

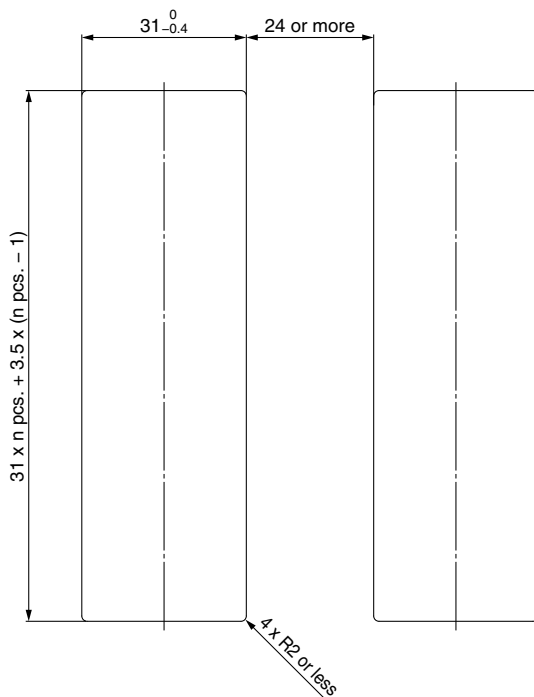

#### Panel mount example <Vertical>

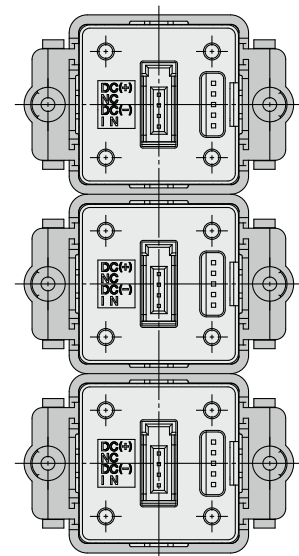

# PFMB Series

## Function Details

### Output operation

The output operation can be selected from the following:  
Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow or output (accumulated output and pulse output) corresponding to accumulated flow.

(Default setting: Hysteresis mode, Normal output)

### Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values. (The display color depends on OUT1 setting.)

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

### Reference condition

The display unit can be selected from standard condition or normal condition.

Standard condition: Flow rate converted to a volume at 20°C and 1 atm (atmosphere)
Normal condition: Flow rate converted to a volume at 0°C and 1 atm (atmosphere)

### Display mode

The display mode can be selected from instantaneous flow or accumulated flow.

Instantaneous flow display
Accumulated flow display

### Response time

The response time can be selected to suit the application. (Default setting: 1 s) Abnormalities can be detected more quickly by setting the response time to 0.05 seconds. The effect of fluctuation and flickering of the display can be reduced by setting the response time to 2 seconds.

0.05 s
0.1 s
0.5 s
1 s
2 s

### Display OFF mode

This function will turn the display OFF. In this mode, decimal points flash on the main screen. If any button is pressed during this mode, the display reverts to normal for 30 seconds to allow checking of the flow, etc.

### Setting of security code

The user can select whether a security code must be entered to release the key lock. At a time of shipment from the factory, it is set such that a security code is not required.

### External input function

This function can be used only when the optional external input is present. The accumulated flow, peak value, and bottom value can be reset remotely.

**Accumulated value external reset:** A function to reset the accumulated flow value when an external input signal is applied.  
In accumulated increment mode, the accumulated value will reset to and increase from zero.  
In accumulated decrement mode, the accumulated value will reset to and decrease from the set value.

\* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory (EEPROM) will be accessed. Take into consideration that the maximum number of times the memory can be accessed is 1 million times. The total number of external inputs and the accumulated value memorizing time interval should not exceed 1 million times.

**Peak/Bottom value reset:** Peak and bottom value are reset.

### Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables confirmation of wiring and prevents system errors due to unexpected output. For the analog output type, when ON the output will be 5 V or 20 mA, and when OFF, it will be 1 V or 4 mA.

\* Also, an increase or decrease of the flow and temperature will not change the on/off status of the output while the forced output function is activated.

### Accumulated value hold

The accumulated value is not cleared even when the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The life time of the memory device is 1 million access times. Take this into consideration before using this function.

### Peak/Bottom value display


The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

### Keylock function

Prevents operation errors such as accidentally changing setting values


### Analog output free range function

This function allows a flow that generates an output of 5 V or 20 mA to be changed. The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.

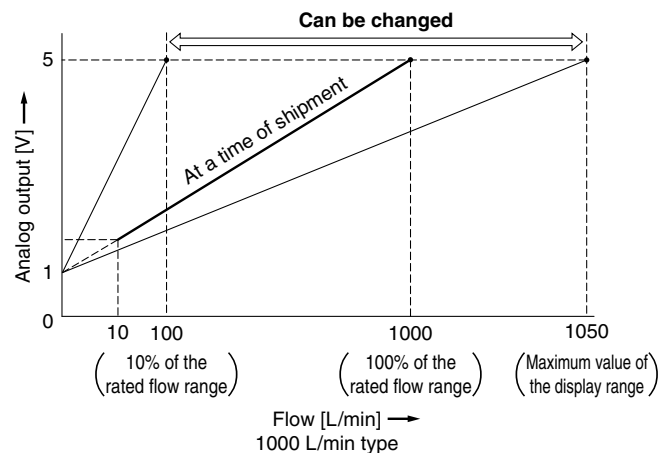


### Reversible display mode

When the switch is used upside down, the orientation of the display can be rotated to make it easier to read by using the reversible display function.



Reversible display function

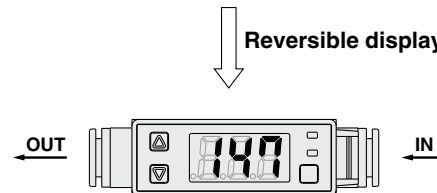

### Reset to the default settings

The product can be returned to its factory default settings.

# PFMB Series

## ■ Error display function

When an error or abnormality arises, the location and contents are displayed.



Display	Error name	Description	Action	
Er 1	OUT1 over current error	A load current of 80 mA or more is applied to the switch output (OUT1).	Eliminate the cause of the over current by turning off the power supply and then turning it on again.	
Er 2	OUT2 over current error	A load current of 80 mA or more is applied to the switch output (OUT2).		
HHH	Instantaneous flow error	The flow rate exceeds the maximum value of the display range.	Decrease the flow rate.	
LLL	Reverse flow error	There is a reverse flow equivalent to -5% or more.	Change the flow to the correct direction.	
999999999 ("999" will flash in any of upper, middle, lower 3-digit displays.)	PFMB7201 PFMB7501 PFMB7102	Accumulated flow error	The flow rate exceeds the accumulated flow rate range.	Clear the accumulated flow rate.
Er 0	System error	Internal data error	Turn the power off and then on again.	
Er 4				
Er 6				
Er 8				

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.

## ⚠ Precautions on piping

### Piping for the metal attachment

- Tighten to the specified torque. Refer to the table below for the required torque values.
- Use a wrench suited for the required torque. Do not use an extremely large wrench (Total length of 40 cm or more).
- If the tightening torque is exceeded, the product can be broken.  
If the tightening torque is insufficient, the fitting may become loose.
- Avoid any sealant tape getting inside the flow path.
- Ensure there is no leakage after piping.
- When mounting the fitting, a wrench should be used on the metal part (attachment) of the fitting only.  
Holding other parts of the product with a wrench may damage the product.  
Specifically, make sure that the wrench does not damage the connector.

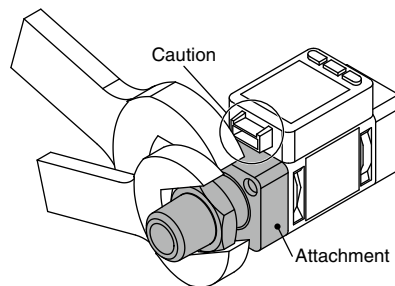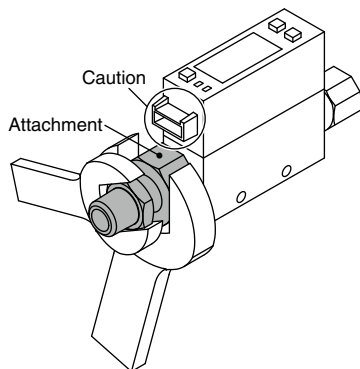

Model	Required torque
PFMB7201	12 to 14 N·m
PFMB7501	28 to 30 N·m
PFMB7102	
PFMB7202	

Model	Nominal thread size	Width across flats of attachment
PFMB7201	Rc1/4, NPT1/4	17 mm
	G1/4	21 mm
PFMB7501	1/2	30 mm
PFMB7102		35 mm
PFMB7202	3/4	35 mm

# PFG300 Series

## Function Details

### Output operation

The output operation can be selected from the following:  
Output (hysteresis mode and window comparator mode) corresponding to instantaneous flow or output (accumulated output and pulse output) corresponding to accumulated flow.

(Default setting: Hysteresis mode, Normal output)

### Simple setting mode

Only the set values for instantaneous flow and accumulated flow can be changed. Output mode, output type, display color, and accumulate pulse output cannot be changed.

### Display color

The display color can be selected for each output condition. The selection of the display color provides visual identification of abnormal values.

Green for ON, Red for OFF
Red for ON, Green for OFF
Red all the time
Green all the time

### Delay time setting

The time from when the instantaneous flow reaches the set value to when the switch output operates can be set. Setting the delay time can prevent the switch output from chattering.

(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s
40 s
50 s
60 s

### Digital filter setting

The time for the digital filter can be set to the sensor input. Setting the digital filter can reduce chattering of the switch output and flickering of the analog output and the display.

The response time indicates when the set value is 90% in relation to the step input.

(Default setting: 0 s)

0.00 s
0.05 to 0.1 s (increment of 0.01 s)
0.1 to 1.0 s (increment of 0.1 s)
1 to 10 s (increment of 1 s)
20 s
30 s

### FUNC output switching function

Analog output, external input, or copy function can be selected.

(Default setting: Analog output)

### Selectable analog output function

1 to 5 V or 0 to 10 V can be selected for the analog voltage output type.

(Default setting: 1 to 5 V)

### External input function

The accumulated flow, peak value, and bottom value can be reset remotely.

**Accumulated value external reset:** A function to reset the accumulated flow value when an external input signal is applied.

In accumulated increment mode, the accumulated value will reset to and increase from zero.

In accumulated decrement mode, the accumulated value will reset to and decrease from the set value.

\* When the accumulated value is stored to memory, every time the accumulated value external reset is activated, the memory will be accessed. Take into consideration that the maximum number of times the memory can be accessed is 1.5 million times. The total number of external inputs and the accumulated value memorizing time interval should not exceed 1.5 million times.

**Peak/Bottom value reset:** Peak and bottom value are reset.

### Forced output function

The output is turned on/off in a fixed state when starting the system or during maintenance. This enables the confirmation of wiring and prevents system errors due to unexpected output.

For the analog output type: When ON, the output will be 5 V (or 10 V when 0 to 10 V is selected) or 20 mA, and when OFF, 1 V (or 0 V when 0 to 10 V is selected) or 4 mA.

\* Also, an increase or decrease of the flow will not change the on/off status of the output while the forced output function is activated.

### Accumulated value hold

The accumulated value is not cleared even when the power supply is turned off. The accumulated value is memorized every 2 or 5 minutes during measurement and continues from the last memorized value when the power supply is turned on again.

The maximum writable limit of the memory device is 1.5 million times, which should be taken into consideration.

### Peak/Bottom value display

The maximum (minimum) flow rate is detected and updated from when the power supply is turned on. In peak (bottom) value display mode, this maximum (minimum) flow rate is displayed.

### Setting of security code

The user can select whether a security code must be entered to release the key lock. At a time of shipment from the factory, it is set such that a security code is not required.

### Keylock function

Prevents operation errors such as accidentally changing setting values

### Reset to the default settings

The product can be returned to its factory default settings.


### Display with zero cut-off setting

When the flow is close to 0 L/min, the product will round the value down and zero will be displayed. A flow value may be displayed even when the flow rate is 0 L/min due to high pressure or depending on the installation. The zero cut function will force the display to zero. The range to display zero can be changed.

# PFG300 Series

## ■ Selection of display on sub screen



The display on the sub screen in measuring mode can be set.



Set value display	Accumulated value display	Peak value display
Displays the set value 	Displays the accumulated value 	Displays the peak value 
Bottom value display	Line name display	OFF
Displays the bottom value 	Displays the line name (Up to 5 alphanumeric characters can be input.) 	Displays nothing 

## ■ Analog output free range function

This function allows a flow that generates an output of 5 V (or 10 V when 0 to 10 V is selected) or 20 mA to be changed. The value can be changed between 10% of the maximum value of the rated flow and the maximum value of the display range.

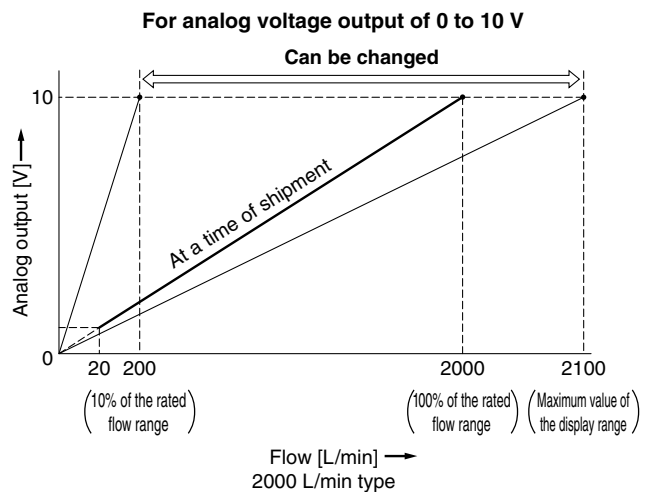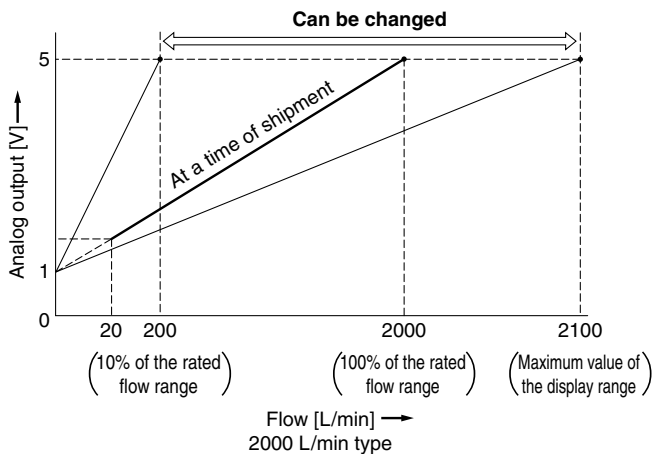

## ■ Error display function

When an error or abnormality arises, the location and contents are displayed.

Display	Error name	Description	Action
Er1 Er2	OUT over current error	A load current of 80 mA or more is applied to the switch output (OUT).	Eliminate the cause of the over current by turning off the power supply and then turning it on again.
HHH	Instantaneous flow error	The flow rate exceeds the maximum value of the display range.	Decrease the flow rate.
LLL	Reverse flow error	There is a reverse flow equivalent to -5% or more.	Change the flow to the correct direction.
999999 flashes x 10 <sup>6</sup>	Accumulated flow error	The flow rate exceeds the accumulated flow rate range.	Clear the accumulated flow rate.
Er0 Er4 Er6 Er7 Er8 Er14 Er40	System error	Internal data error	Turn the power off and then on again.
Er13	Copy error	The copy function does not operate properly.	After clearing the error by pressing the  and  buttons simultaneously for a minimum of 1 second, check the wiring and the model, and then attempt to copy again.

If the error cannot be solved after the instructions above are performed, please contact SMC for investigation.



■ **Copy function**

The set values of the monitor can be copied.

This can reduce setting labor and minimize the risk of setting mistakes.

**The set value can be copied to up to 10 flow monitors simultaneously.**

**(Maximum transmission distance: 4 m)**

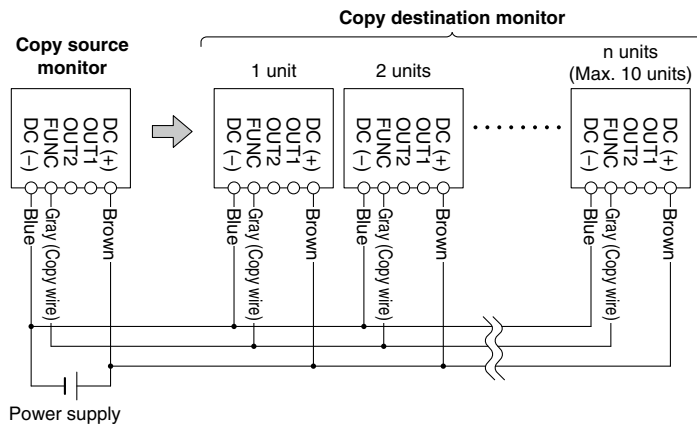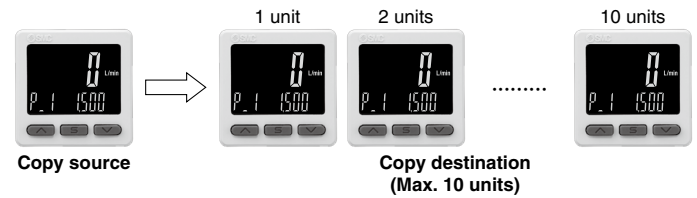

- 1) Wire as shown in the figure on the left.
- 2) All monitors are set to copy destination when first purchased. (Default condition is the monitor to be copied to.)
- 3) Press the **S** button on the source monitor to start copying.

■ **Selection of power saving mode**

Power saving mode can be selected.

It shifts to the power saving mode without button operation for 30 seconds.

It is set to the normal mode (Power saving mode is OFF.) at a time of shipment from the factory.


(During power saving mode, [ECo] will flash in the sub screen and the operation light is ON (only when the switch is ON).)


\* There may be a difference in the displayed value on the connected flow switch and the flow monitor. When the flow monitor display is being used, it is recommended to set the flow switch display to OFF mode.




## Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)\*1), and other safety regulations.

 **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.

 **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.

 **Danger :** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

\*1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines.  
(Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots – Safety.  
etc.

### Warning

#### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

#### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

#### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

#### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

### Caution

#### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.  
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.  
If anything is unclear, contact your nearest sales branch.

### Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

#### Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.\*2)  
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.  
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.

##### \*2) Vacuum pads are excluded from this 1 year warranty.

A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.  
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

#### Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

### Caution

#### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

#### Revision History

<b>Edition B</b>	* 20 to 2000 L type has been added.	TS
<b>Edition C</b>	* The digital flow monitor PFG300 series has been added. * Number of pages has been increased from 24 to 36.	VZ

## Safety Instructions

Be sure to read the “Handling Precautions for SMC Products” (M-E03-3) and “Operation Manual” before use.