

Data Sheet

Basic module

PVBZ-HS (Hitch Single-acting)

The PVG 32 valve was originally launched on the market in 1988 with a range of high performance electrical actuators. In the late nineties, the program was extended to also include new features such as low leak ports, special inlet sections and special electrohydraulic actuator options.

The special PVBZ-HS load and pressure compensated module was developed for applications, which need a valve slice for standard single acting cylinders.

Application examples are:

- Rear-Hitch on tractors
- Headers on combines and harvesters

The new PVBZ-HS basic module can be mixed with basic modules PVB/PVBZ (with additional tank line TO) and offers the following features.


Features

- Low leakage work port
- Special 3/3 spools
- Separated tankport
- Integrated PVLP 63 shock/anti-cavitation valve

Comprehensive technical literature online
at powersolutions.danfoss.com



PVG-32 hitch single-acting valve module

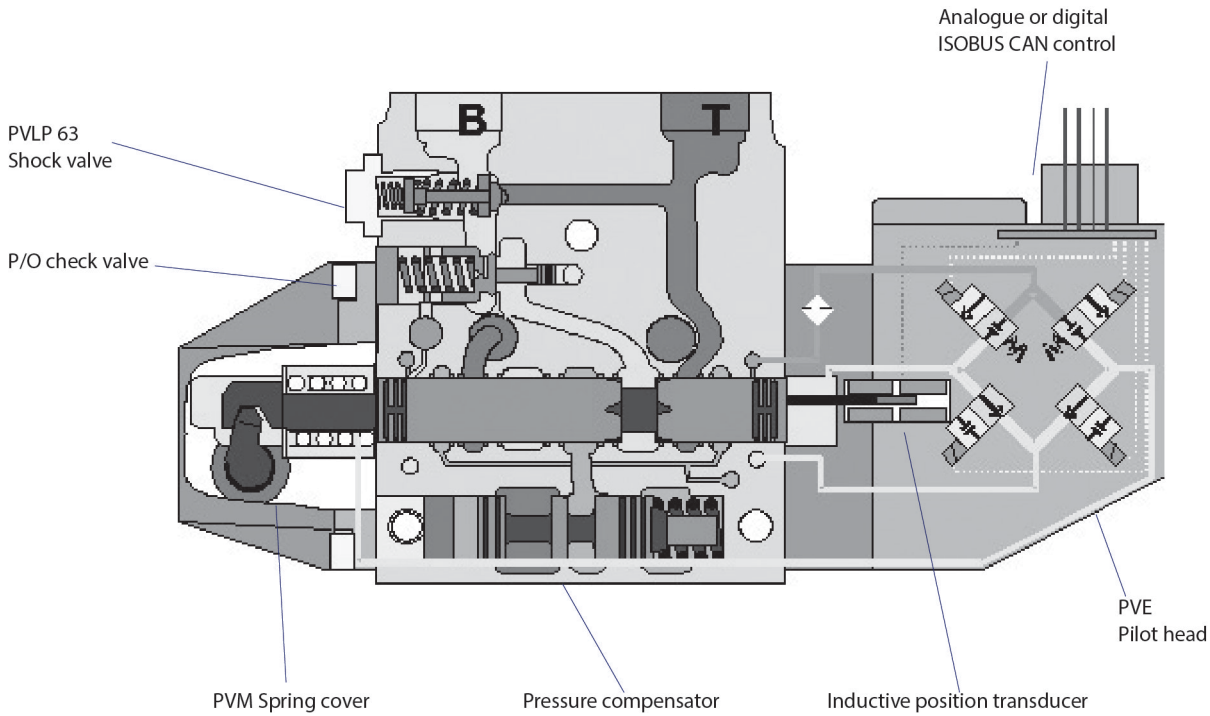

Max. pressure	Port P continuous	250 bar	[3625 psi]
	Port B	280 bar	[4061 psi]
	Port T static/dynamic	25 bar/40 bar	[365/580 psi]
Oil flow, rated	Port P	140/230 l/min	[37/61 US gal/min]
	Port B with press. comp.	100 l/min	[26.4 US gal/min]
Spool travel, standard		± 7 mm	[±0.28 in]
Dead band, flow control spool	Standard	± 0.8 mm	[±0.03 in]
Max. internal leakage at 150 bar [2175 psi] and 21 mm ² /s [102 SUS]	B to T without shock valve:	1.0 cm ³ /min	[0.06 in ³ /min]
	B to T with shock valve:	6.0 cm ³ /min	[0.37 in ³ /min]
Oil temperature (inlet temperature)	Recommended temperature	30 to 60°C	[86 to 140°F]
	Min. temperature	-30°C	[-22°F]
	Max. temperature	+90°C	[194°F]
Ambient temperature		-30 to +60°C	[-22 to +140°F]
Oil viscosity	Operating range	12 - 75 mm ² /s	[65-347 SUS]
	Min. viscosity	4 mm ² /s	[39 SUS]
	Max. viscosity	460 mm ² /s	[2128 SUS]
Filtration	Max. contamination (ISO 4406)	19/16	19/16

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.