


ENGINEERING
TOMORROW



Electrical Installation

MP1 Pumps

Non-Feedback Proportional Electric
(NFPE) Control

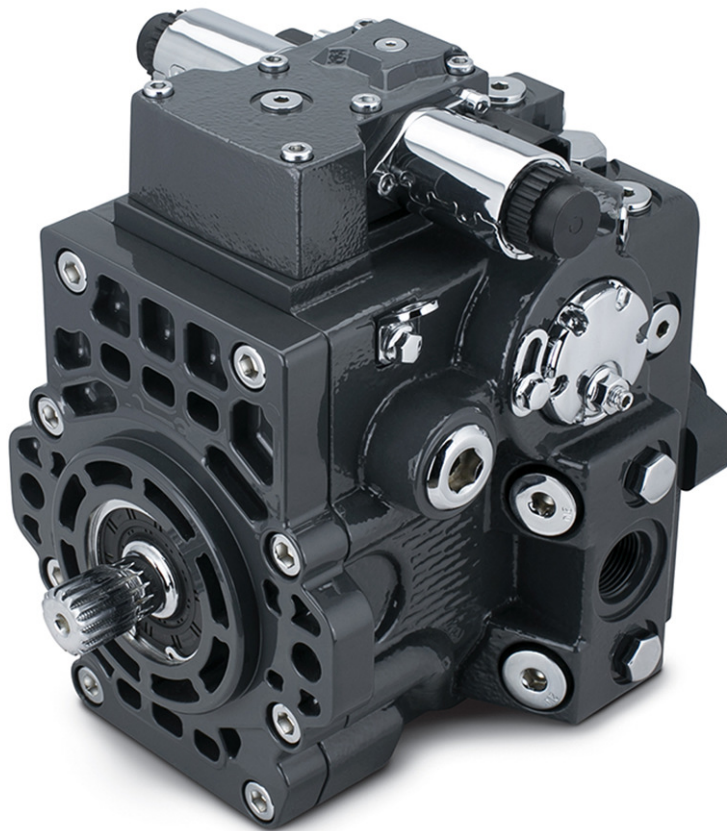

Revision history

Table of revisions

Date	Changed	Rev
January 2018	add control current table	0103
November 2017	New cover image	0102
October 2017	First Edition	0101

Contents**Literature References**

MP1 Reference Literature.....	4
Latest version of technical literature.....	4

Product Overview

Product Image.....	5
Nomenclature.....	5
Theory of operation.....	6
NFPE proportional actuation.....	6
Hydrostatic drive line power.....	6
Hydraulic schematic.....	6
Electrical specifications.....	7

Electrical installation

Pinout.....	8
DEUTSCH connector.....	8
Pin compatibility.....	8
Input/output matrix.....	8
Mating connector.....	9
DEUTSCH connector parts list	9

Literature References**MP1 Reference Literature**

Literature title	Description	Literature number
<i>MP1 Axial Piston Pumps Technical Information</i>	Complete product electrical and mechanical specifications	BC00000352

Latest version of technical literature

Danfoss product literature is online at: <http://powersolutions.danfoss.com/literature/>

Product Overview

Product Image

MP1 NFPE control



Nomenclature

Model code

Prod	A	B	C	D	F	H	J	T	K	E	M	N	Z	L	V	G	W	X	Y	
MP1	P																			

D - Control

Code	Description
SN1	NFPE, 12V, Manual Over-Ride, Inch ports
SN2	NFPE, 24V, Manual Over-Ride, Inch ports
MN1	NFPE, 12V, Manual Over-Ride, Metric ports
MN2	NFPE, 24V, Manual Over-Ride, Metric ports


Only certain control options for the MP1 pump utilize Non-Feedback Proportional Electric Control (NFPE). Please refer to the pump's nomenclature to determine if the pump is equipped with the proper option. The nomenclature can be found on the pump's nametag.

Product Overview

Theory of operation

The Non Feedback Proportional Electric (NFPE) control is an electrical automotive control in which an electrical input signal activates one of two proportional solenoids that port charge pressure to either side of the pump servo cylinder. The NFPE control has no mechanical feedback mechanism. The pump displacement is proportional to the solenoid signal current, but it also depends upon pump input speed and system pressure.

NFPE proportional actuation

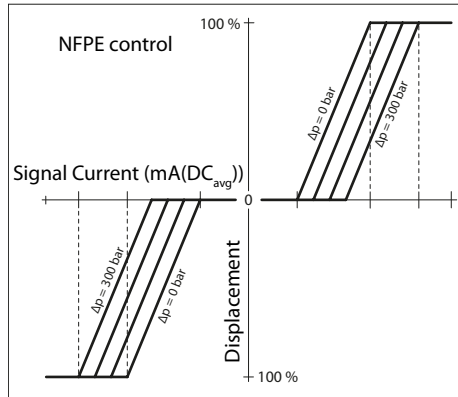


Hydrostatic drive line power

⚠ Warning

Unintended vehicle or machine movement hazard. The loss of hydrostatic drive line power, in any mode of operation (forward, neutral, or reverse) may cause the system to lose hydrostatic braking capacity. You must provide a braking system, redundant to the hydrostatic transmission, sufficient to stop and hold the vehicle or machine in the event of hydrostatic drive power loss.

Hydraulic schematic

NFPE Schematic

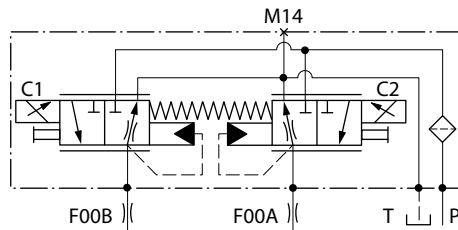

Product Overview
Electrical specifications
Control current

Voltage	a*	b	c	Pin connections
12 V	600 mA	1080 mA	1360 mA	any order
24 V	300 mA	540 mA	680 mA	

* Factory test current, for vehicle movement or application actuation expect higher or lower value.

MP1 pump NFPE electrical specifications

Voltage	12V	24V
Rated power	18 W	18 W
Coil resistance at 20° C [70° F]	3.66 Ω	14.20 Ω
Coil resistance at 80°C [176°F]	4.52 Ω	17.52 Ω
PWM frequency range	70 to 200 Hz	70 to 200 Hz
Recommended PWM frequency*	100 Hz	100 Hz
Inductance	33 mH	140 mH


* PWM signal required for optimum control performance. Verify the PWM frequency is set correctly in the PLUS+1® controller. The default is set at 4000 Hz which will significantly reduce NFPE performance.

Electrical installation

Pinout

DEUTSCH connector

Pin location



Pinout

Pin	Function
1	PWM signal
2	Ground

Pinout (alternative)

Pin	Function
1	Ground
2	PWM signal

Pin compatibility

PLUS+1® module pin type


Pin	Function
1, 2	PWMOUT/DOUT/PVG Power supply
1, 2	PWMOUT/DOUT/PVGOUT
1, 2	Power ground -

Warning

Unintended vehicle or machine movement hazard. Verify the wiring harness to ensure the correct PLUS +1® pin is properly connected to each control pin.

Input/output matrix

NFPE/C1 and C2 location

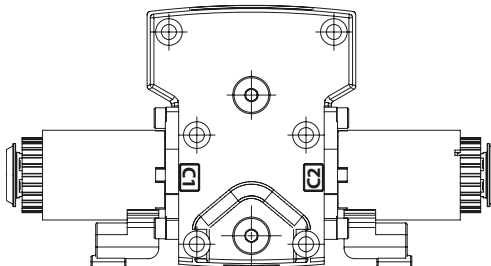

Electrical installation

Pump output flow direction versus control signal

Shaft rotation	CW		CCW	
Coil energized	C1	C2	C1	C2
Port A	in	out	out	in
Port B	out	in	in	out
Servo port pressurized	M5	M4	M5	M4

Mating connector

DEUTSCH connector parts list

Description	Quantity	Ordering number
Connector	1	DEUTSCH DT06-2S
Wedge lock	1	DEUTSCH W2S
Socket contact (16 and 18 AWG)	2	DEUTSCH 0462-201-16141
Mating connector kit	1	Danfoss K29657

Products we offer:

- Bent Axis Motors
- Closed Circuit Axial Piston Pumps and Motors
- Displays
- Electrohydraulic Power Steering
- Electrohydraulics
- Hydraulic Power Steering
- Integrated Systems
- Joysticks and Control Handles
- Microcontrollers and Software
- Open Circuit Axial Piston Pumps
- Orbital Motors
- PLUS+1® GUIDE
- Proportional Valves
- Sensors
- Steering
- Transit Mixer Drives

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electronic components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market. Building on our extensive applications expertise, we work closely with our customers to ensure exceptional performance for a broad range of off-highway vehicles.

We help OEMs around the world speed up system development, reduce costs and bring vehicles to market faster.

Danfoss – Your Strongest Partner in Mobile Hydraulics.

Go to www.powersolutions.danfoss.com for further product information.

Wherever off-highway vehicles are at work, so is Danfoss. We offer expert worldwide support for our customers, ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide comprehensive global service for all of our components.

Please contact the Danfoss Power Solution representative nearest you.

Comatrol

www.comatrol.com

Turolla

www.turollaocg.com

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Local address:

Danfoss Power Solutions (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

Danfoss Power Solutions GmbH & Co. OHG
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

Danfoss Power Solutions ApS
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

Danfoss Power Solutions Trading (Shanghai) Co., Ltd.
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 3418 5200

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.