

Service Data

Vickers®


Vane Pumps



Double Vane Pump


2520VSH 12 A 5 F 86 ** 10

CAPACITY (GPM) COVER END PUMP	● ROTOR	● VANE KIT	● RING	● INLET PLATE	● CARTRIDGE KIT
5	402690	922741	333624	584383	585471
8	403539	922743	875509	584384	875510

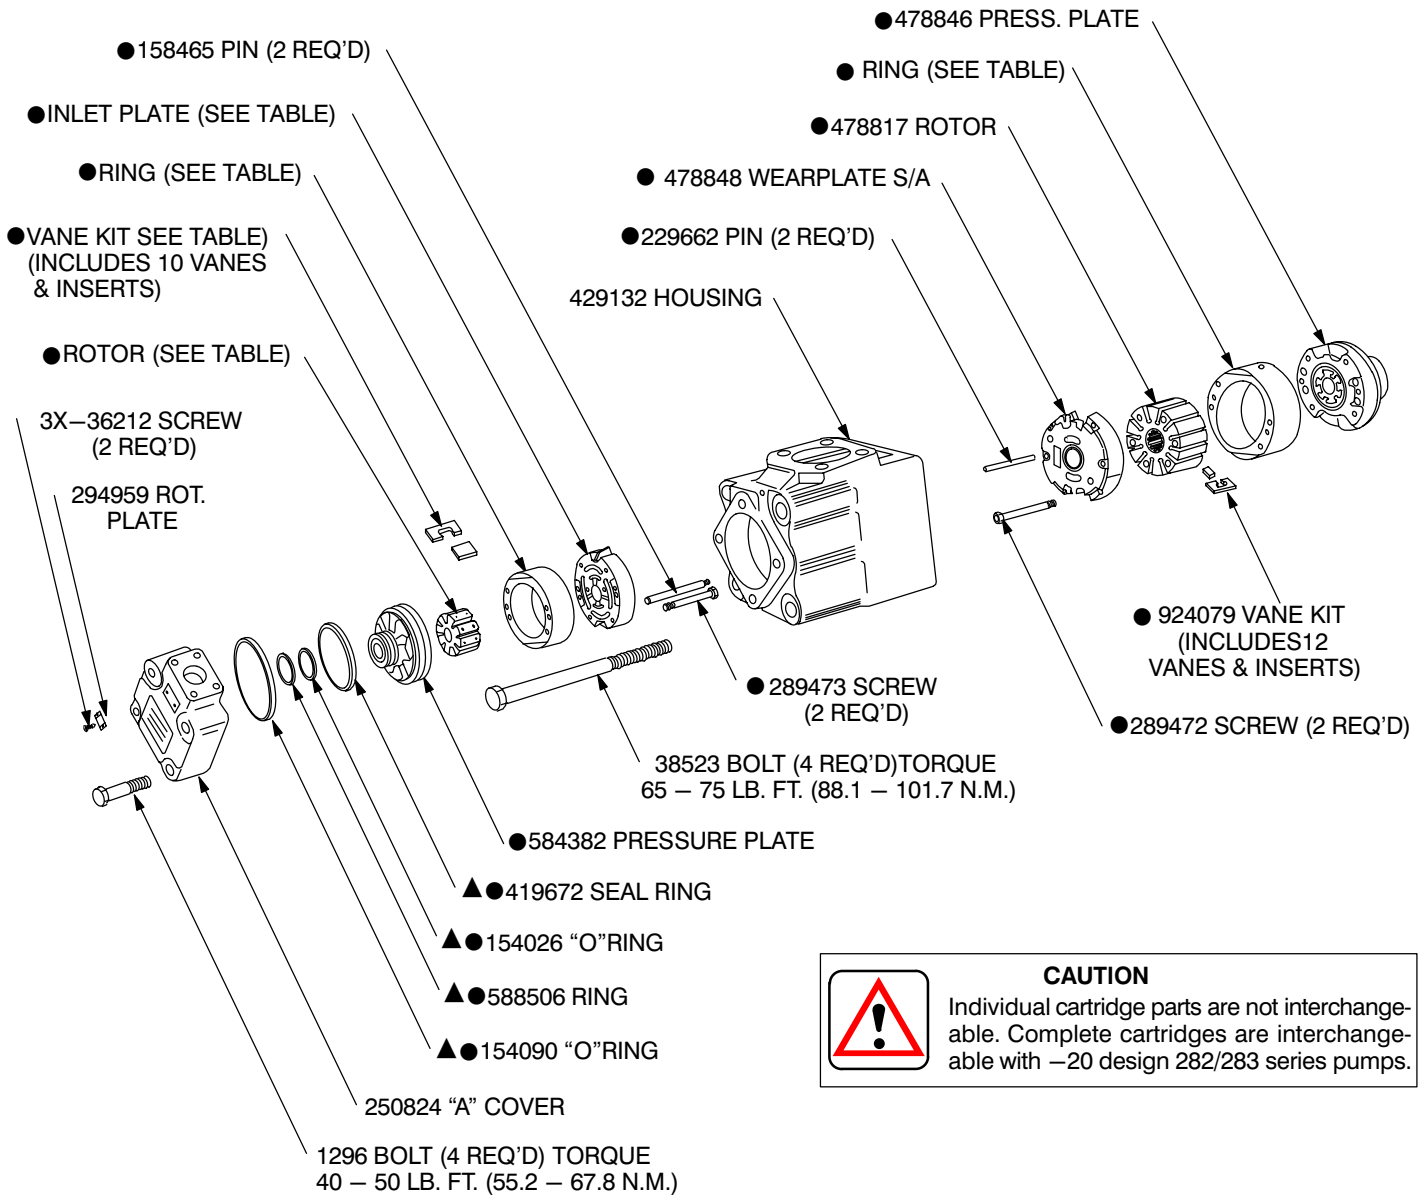


CAUTION
 Individual cartridge parts are not interchangeable. Complete cartridges are interchangeable with –20 design 282/283 series pumps.

- INCLUDED IN CARTRIDGE KIT
- ▲ INCLUDED IN SEAL KIT 922856
- ◇ INCLUDED IN FB-B-10

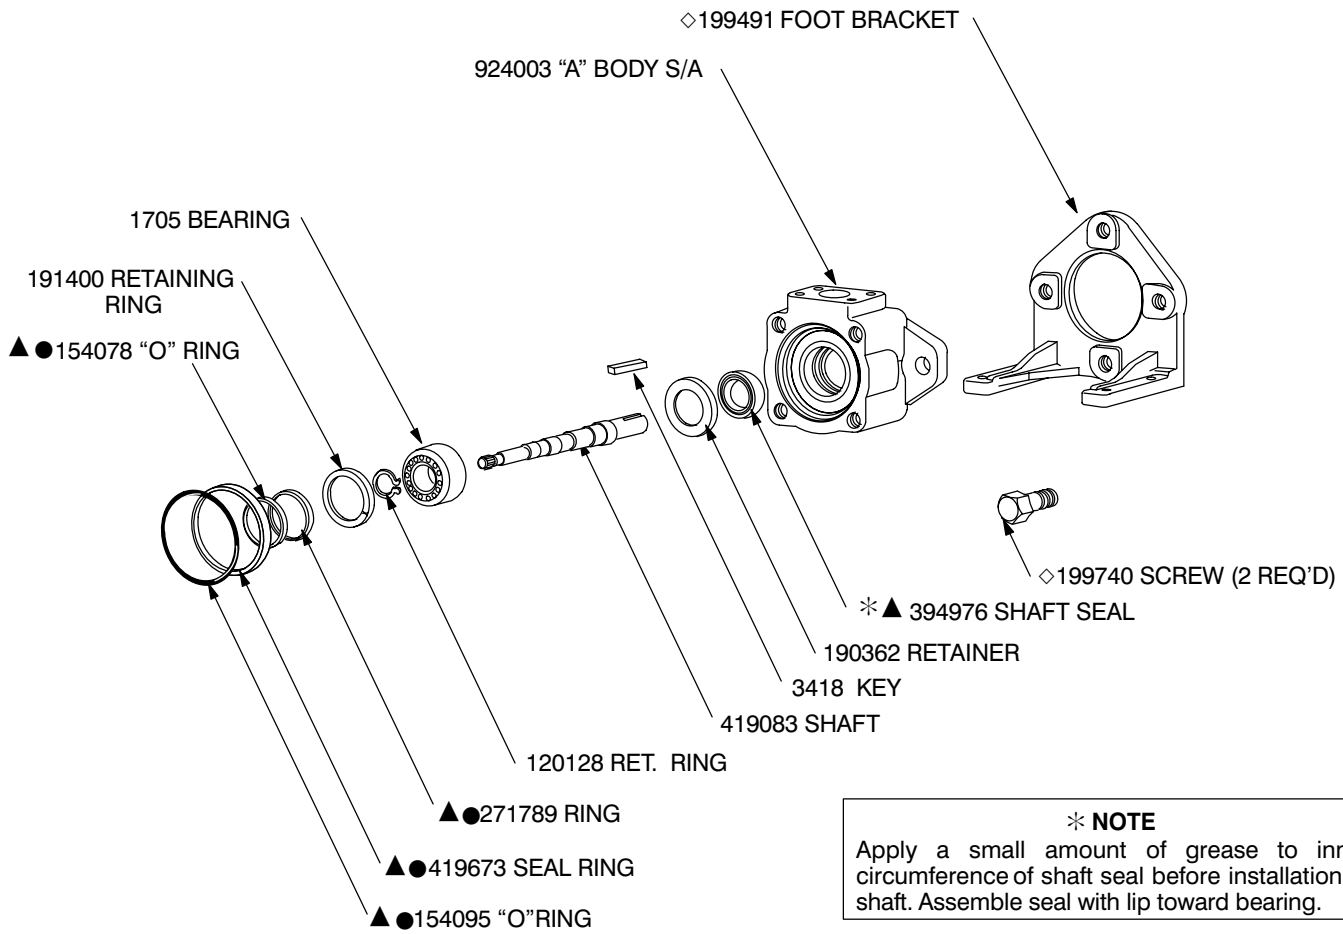

*** NOTE**
 Apply a small amount of grease to inner circumference of shaft seal before installation of shaft. Assemble seal with lip toward bearing.

CAPACITY (GPM) SHAFT END PUMP	● RING	● CARTRIDGE KIT
12	584610	478813
14	584612	478814
17	5846145	478815
21	84616	478816

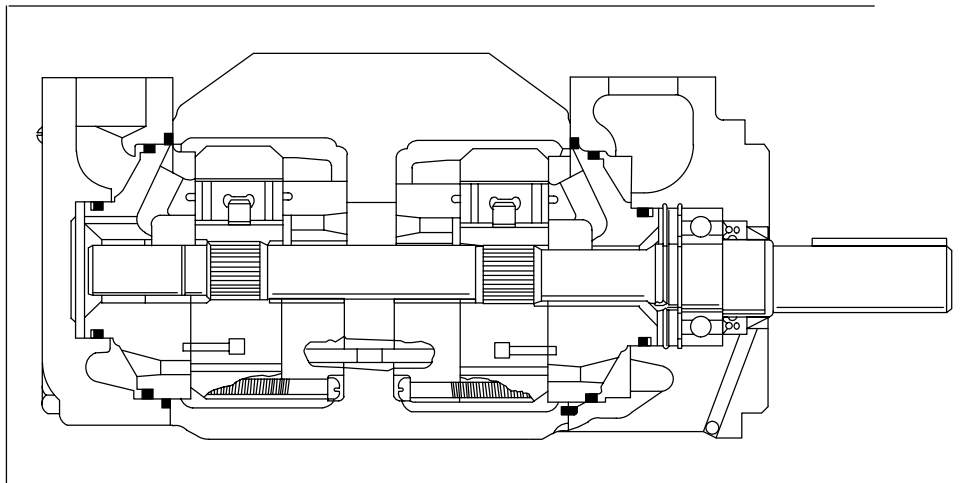

MODEL CODE BREAKDOWN

2520 VSH 12 A 5 F 86 ** 10 L

1 2 3 4 5 6 7 8 9 10

1 Series
(2520 Double Pump)

2 Intra-Vane Pump
(VSH Series)

3 US GPM Capacity
(Shaft End Pump)
SAE Rating 1200 RPM-100 PSI (7 Bar)
12 – 12 GPM 17 – 17 GPM
14 – 14 GPM 21 – 21 GPM

4 SAE Port Connections

Code	Inlet	Outlet # 1	Outlet # 2
A	4-Bolt Flg.	4-Bolt Flg.	4-Bolt Flg.
C	4-Bolt Flg.	SAE ST. Thd.	SAE ST. Thd.
E	4-Bolt Flg.	4-Bolt Flg.	SAE ST. Thd.

5 US GPM Capacity
(Cover End Pump)
SAE Rating 1200 RPM-100 PSI (7 Bar)
5 – 5 GPM 8 – 8 GPM

6 Mounting
F – Foot
Omit – Flange

7 Shaft Type
86 – STR. Key

8 Outlet Port Positions
(Viewed From Cover End Of Pump)

With No. 1 Outlet Opposite Inlet :
AA – No. 2 Outlet – 135° CCW From Inlet
AB – No. 2 Outlet – 45° CCW From Inlet
AC – No. 2 Outlet – 45° CW From Inlet
AD – No. 2 Outlet – 135° CW From Inlet


With No. 1 Outlet 90° CCW From Inlet :
BA – No. 2 Outlet – 135° CCW From Inlet
BB – No. 2 Outlet – 45° CCW From Inlet
BC – No. 2 Outlet – 45° CW From Inlet
BD – No. 2 Outlet – 135° CW From Inlet

With No. 1 Outlet Inline With Inlet :
CA – No. 2 Outlet – 135° CCW From Inlet
CB – No. 2 Outlet – 45° CCW From Inlet
CC – No. 2 Outlet – 45° CW From Inlet
CD – No. 2 Outlet – 135° CW From Inlet

With No. 1 Outlet 90° CW From Inlet :
DA – No. 2 Outlet – 135° CCW From Inlet
DB – No. 2 Outlet – 45° CCW From Inlet
DC – No. 2 Outlet – 45° CW From Inlet
DD – No. 2 Outlet – 135° CW From Inlet

9 Design

10 Shaft Rotation
(Viewed From Shaft End)
L – Left Hand (CCW Rotation)
Omit – Right Hand (CW Rotation)

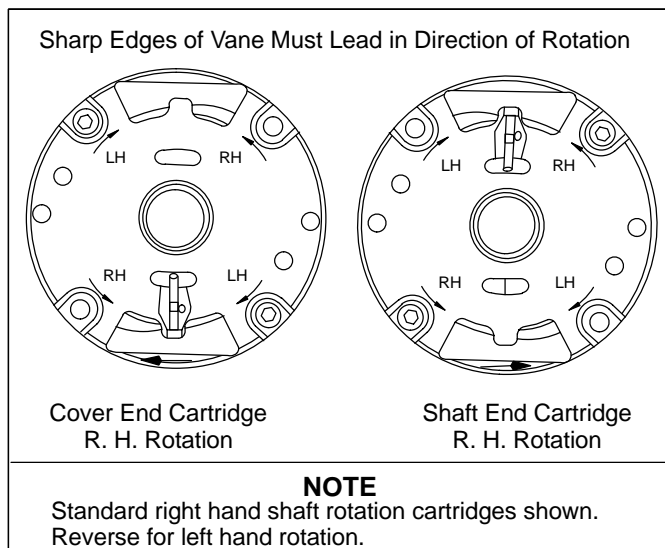

NOTE

To reverse cartridge kit rotation, remove the two screws and reverse the location of the inlet support plate and the outlet support plate. Reinstall the two screws hand tight. Use pump cover to align all sections of the cartridge. Carefully remove the cover and tighten the screws.

When ordering spare cartridge parts, it is recommended they be obtained in cartridge kits. Kits are assembled and tested for either right or left hand rotation. If left hand rotation is required, it should be specified on parts order by adding suffix "L" to cartridge kit number.

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from OFF, OFR, and OFRS filter series are recommended.