

### Input Chokes



Choke Identification		Electrical Characteristics			Overall Dimensions (mm)								
MLFB	Frame Size	[V]	[A]	Torque [Nm]	Input Choke			Drive Envelope			Fixing Dimensions (mm)		Weight [kg]
					H	W	D	H	W	D	H	W	
6SE6400-3CC05-2DD0	FSD	200-480	53,6	2,0-2,3	520	275	85	520	275	330	486	235	9,5
6SE6400-3CC05-4DD0		380-600	45,8										8,5
6SE6400-3CC08-8EC0	FSE	200-240	93,2	6,0-8,0	650	275	95	650	275	340	616,4	235	17,0
6SE6400-3CC08-3ED0		380-600	86,9										17,0
Stand-alone Chokes											n <sub>1</sub>	n <sub>2</sub>	
6SE6400-3CC11-7FD0	FSF	200-480	183	9,0-10,0	210	240	141	-	-	-	109	190	24,0
6SE6400-3CC11-2FD0		380-600	129										210

### Output Chokes

Choke Identification		Electrical Characteristics				Overall Dimensions (mm)								
MLFB	Frame Size	Type	[V]	[A]	Torque [Nm]	Output Choke			Fixing Dimensions (mm)				Fixing Screw	Weight [kg]
						H	W	D	n <sub>1</sub>	n <sub>2</sub>	n <sub>3</sub>	n <sub>4</sub>		
6SE6400-3TC02-8DC0	FSD	2	200-240	28	2,3-2,6	122	124	73	42	1)	53	112	M4	1,3
6SE6400-3TC05-4DD0		1	200-480	54	3,5-4,0	210	225	150	76	176	-	-	M6	10,7
6SE6400-3TC03-8DD0		1	380-480	38	3,5-4,0	210	225	179	76	176	-	-	M6	16,1
6SE6400-3TC02-2DE0		2	500-600	22	2,3-2,6	122	124	73	42	1)	53	112	M4	1,2
6SE6400-3TC02-7DE0		2	500-600	27	2,3-2,6	139	148	78	49	90	58	136	M4	2,5
6SE6400-3TC03-2DE0		1	500-600	32	3,5-4,0	210	225	179	76	176	-	-	M6	16,0
6SE6400-3TC08-0ED0	FSE	1	200-480	80	4,8-5,0	210	225	150	76	176	-	-	M6	10,4
6SE6400-3TC07-5ED0		1	380-480	75	4,8-5,0	248	270	209	88	200	-	-	M8	24,9
6SE6400-3TC05-2EE0		2	500-600	52	3,5-4,0	159	178	73	49	113	53	166	M5	3,3
6SE6400-3TC15-4FD0	FSF	1	200-480	154	9,5-10,0	210	225	150	76	176	-	-	M6	11,2
6SE6400-3TC14-5FD0		1	380-480	145	9,5-10,0	321	350	288	120	264	-	-	M8	51,5
6SE6400-3TC06-2FE0		1	500-600	62	4,8-5,0	269	300	220	100	224	-	-	M8	33,9
6SE6400-3TC08-8FE0		1	500-600	99	9,5-10,0	321	350	288	120	264	-	-	M8	51,5


1) Befestigungsschlit in Fußmitte / Mounting hole in center

### Input Chokes

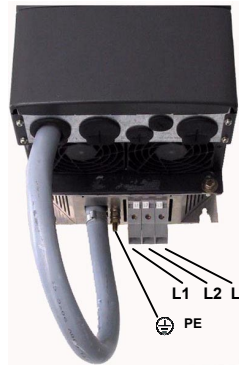
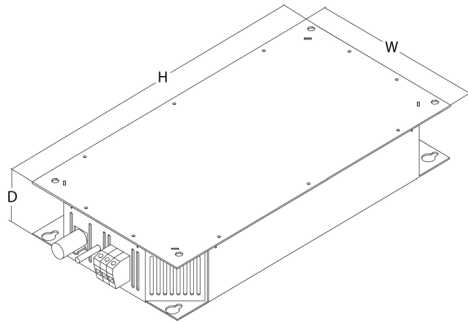


### Output Chokes





#### Type 1

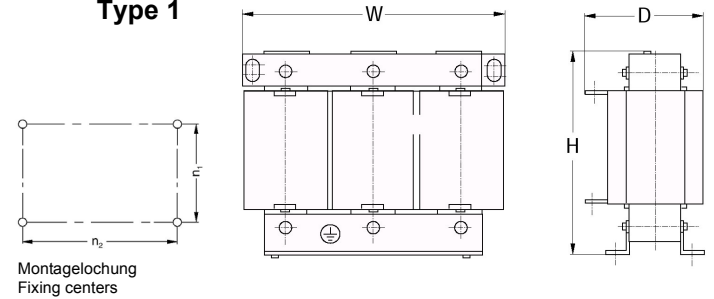

#### Type 2

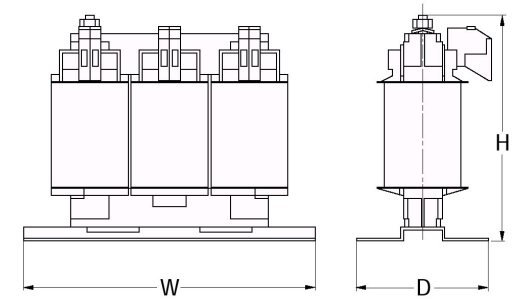

Montagelochung  
Fixing centers

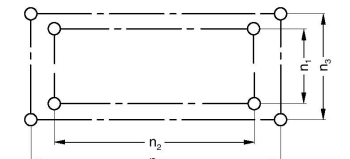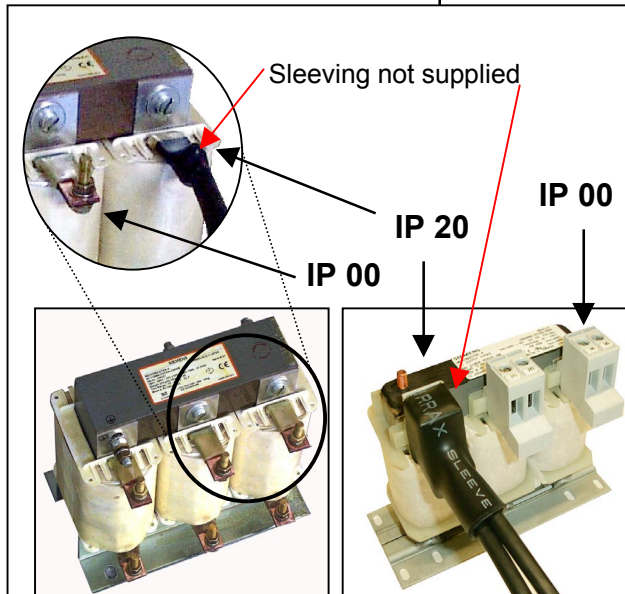

n1 und n2 Montagelochung nach DIN 41308  
n3 und n4 Montagelochung nach EN60852-4  
n1 and n2 fixing centers according to DIN 41308  
n3 and n4 fixing centres according to EN60852-4