



## Catalog Numbers


Catalog No.	Amperage Rating	Max. Interrupting Rating
<b>1 PHASE, 3 WIRE, 120/240V AC MAX</b>		
WB1200TNH	200	65,000
WB1200TUNH	200	100,000
WB1250TNH	250	65,000
WB1250TUNH	250	100,000
WB1300TNH	300	65,000
WB1300TUNH	300	100,000
WB1350TNH	350	65,000
WB1350TUNH	350	100,000
WB1400TNH	400	65,000
WB1400TUNH	400	100,000

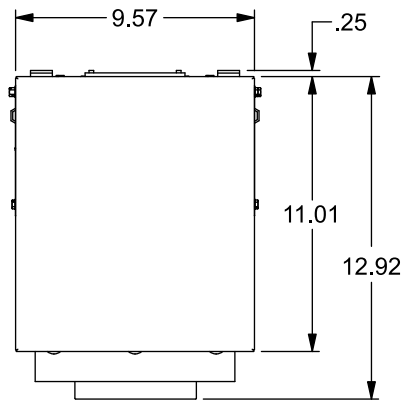

- TYPE 3R OUTDOOR ENCLOSURE
- MAIN BUS RATING: 1200A MAX., 240V AC Max.
- 1 PHASE
- FOR OVERHEAD SERVICE ONLY
- MOUNTING RAILS AND ADJUSTABLE BRACKETS FOR SECURE MOUNTING

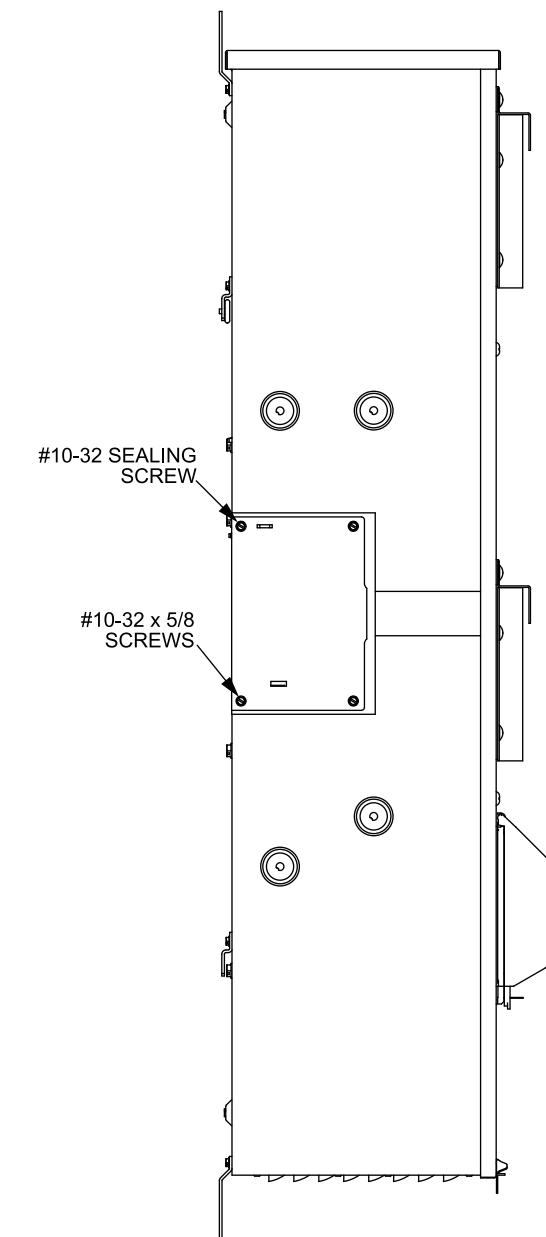

FRONT VIEW SHOWN WITH COVER AND SHIELDS REMOVED

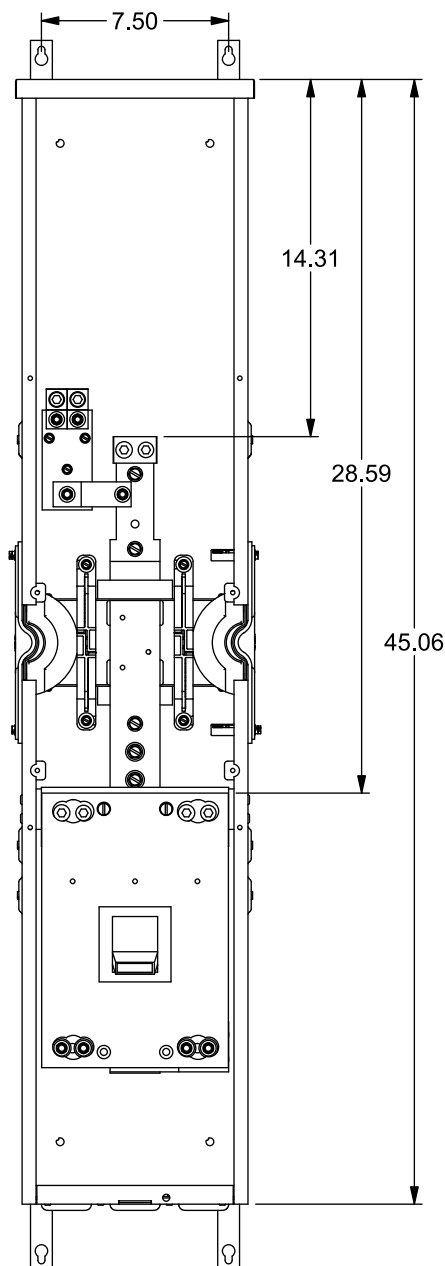


## Accessories

Ground Bar Kit . . . . . ECLX069M  
 Ground Lug Kit (3 Position) . . . . . ECGLK3300, (3) #6-300kcmil, Torque 250 lb-in  
 Ground Lug Kit (6 Position) . . . . . ECGLK6300, (6) #6-300kcmil, Torque 250 lb-in  
 Breaker Lug Kit (factory installed) . . . . . LK12500 (kit includes 3 lugs)  
 Alternate Breaker Lug Kit . . . . . LK11750 - (1) 500-750 kcmil, Torque 500 lb.-in. (kit includes 3 lugs)

**Equip Ground Acc'y Cat. No. ECLX069M**

Small Terminals	Large Terminals
Wire Range / Torque	Wire Range / Torque
10-14 AWG 20 lb-in	10-14 AWG 35 lb-in
8 AWG . . . . 25 lb-in	8 AWG . . . . 40 lb-in
6 AWG . . . . 35 lb-in	1/0-6 AWG . 45 lb-in

HD Type Hubs	Catalog No.
Hub Cover Plate	EC56933S
Type HD Hub 2"	EC56854
Type HD Hub 2-1/2"	EC56855
Type HD Hub 3"	EC56856
Type HD Hub 3-1/2"	EC56857
Type HD Hub 4"	EC56858

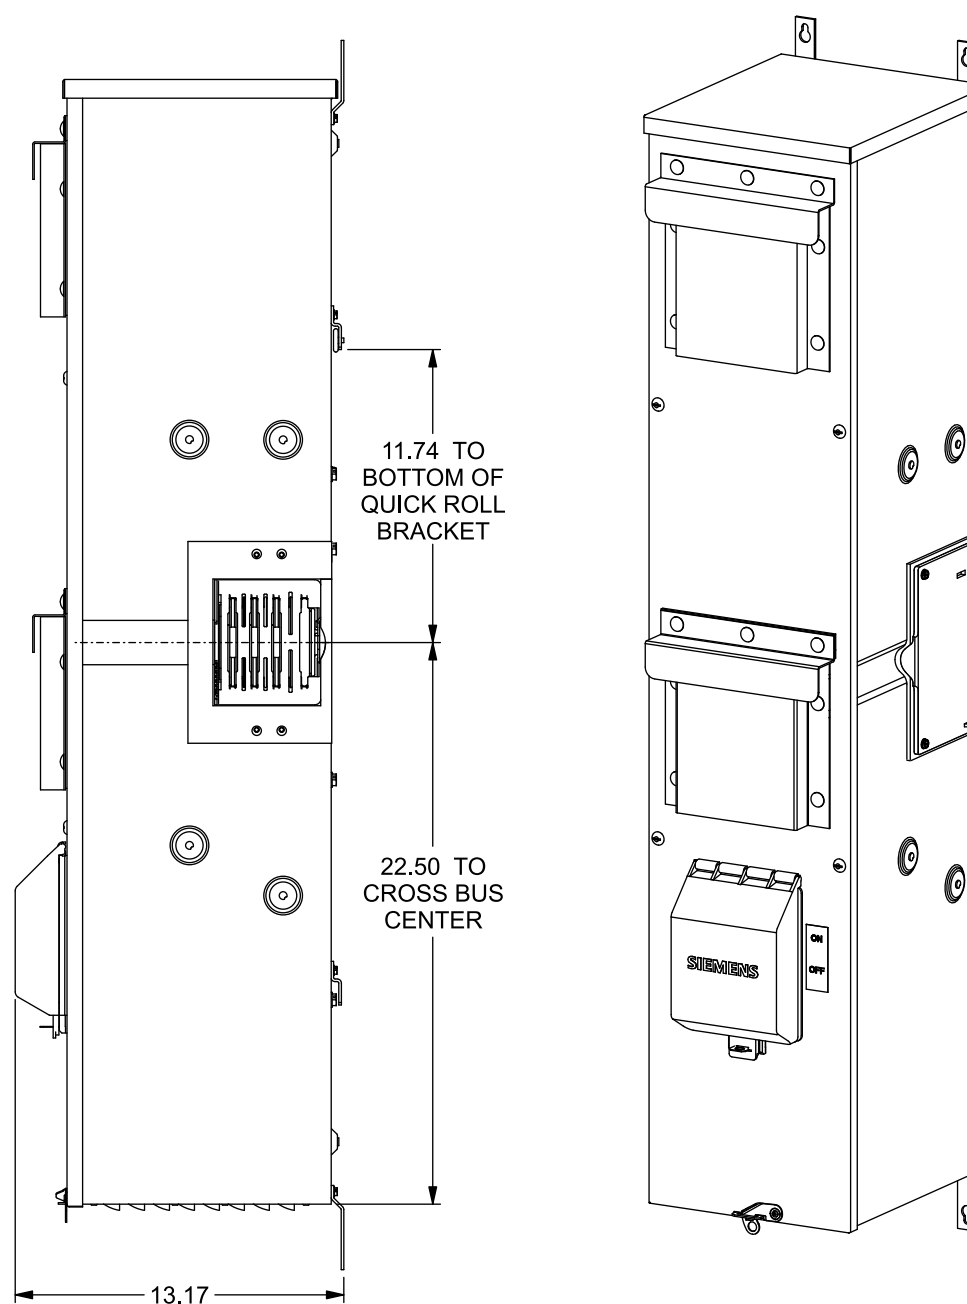


## Additional Modules

**IMPORTANT - for use with:**

Module Description	Siemens Series#
Main Breakers	WB(M), WEB(M), WXB, BFT
Switches	WMP, WS, WES, WXS
Tap/Terminal Boxes	WTB, WET, WCT, PU, WTBN, WBT
Pull Boxes	WMMB
Meter Module	(W)MM, (W)MT, (W)ML, (W)MK, (W)MLZ(F), (W)MN
Meter Combinations	WC, WCL, WCT,
Extension Box	WSP, WSPD
Bussed Elbow	BE, WELB

Connect Modules Using:	Catalog Number / Torque
QuickConnect	QC1, Torque 400-440 lb-in (35-36 ft.-lb.)

## Schematic

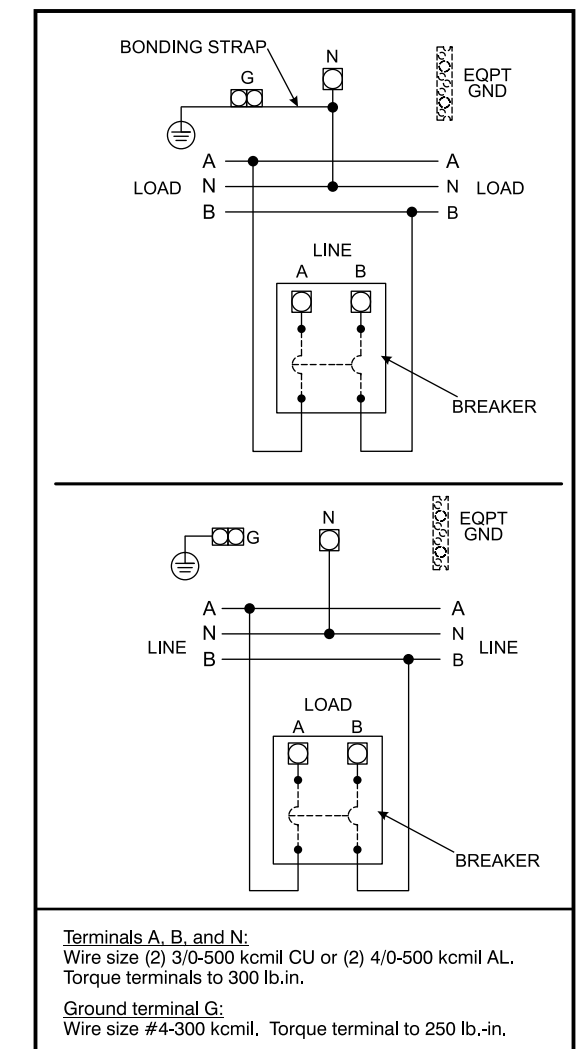

© 2018 Copyright Siemens Industry, Inc.

**SIEMENS**  
 Siemens Industry, Inc.

### PowerMod™ Breaker Mains

Description: **200-400A, 1 Phase, No Hub Openings, Top Feed Skinny Mains**

KAM 8/6/18 DO NOT SCALE DRAWING Dwg. No. **WB1200TNH-WB1400TUNH**