


REV.	EQN. NO.	APPD.
A	BC-07-7048930	James

90±10(3.54±0.394)

WIRING LIST		
P1		P2
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8
9		9
10		10
11		11
12		12
13		13
14		14
15	COPPER FOIL	15
16	DRAIN WIRE	16
17		17
18		18
19		19
20		20
21		21
22		22
23		23
24		24
25		25
26		26

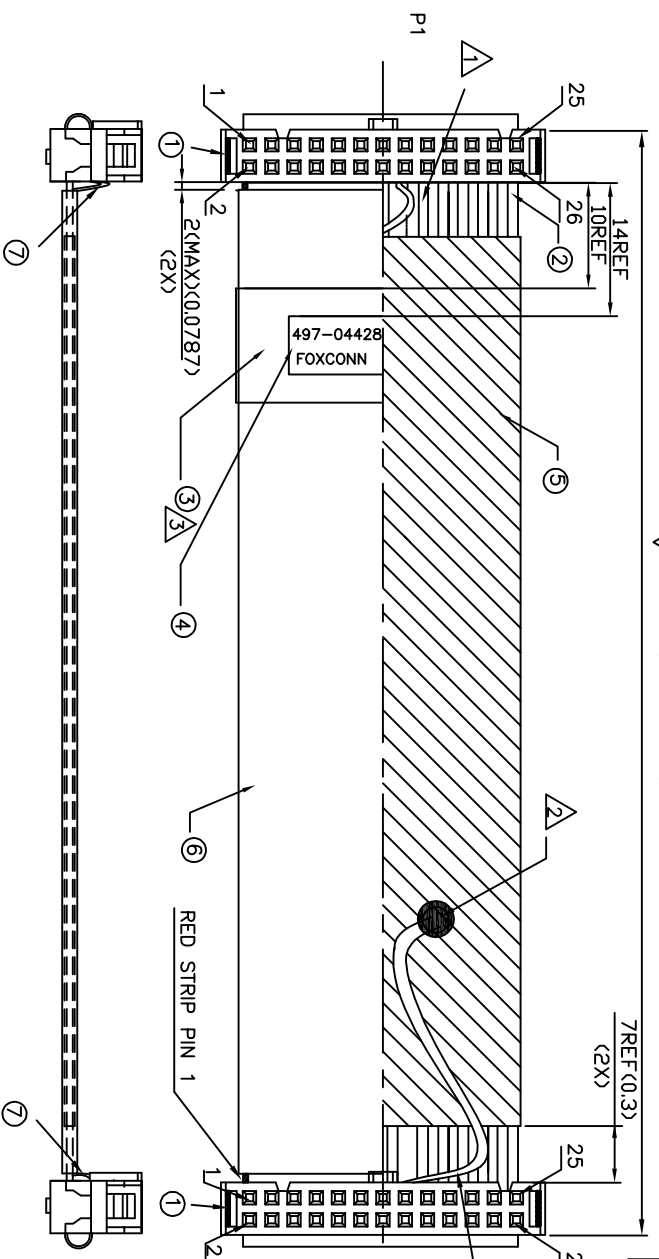

NOTES:

- 1. THE FLAT CABLE No.15PIN WIRE CUT OFF AND ROUND A CIRCLE IT'S COPPER WIRES ARE NOT EXPOSED
- 2. THE FLAT CABLE No.15PIN WIRE SOLDER WITH COPPER FOIL
- 3. THE CLARITY TAPE ROUND A CIRCLE ON THE LABEL.
- 4. CRITICAL DIMENSION
- 5. INSULATION RESISTANCE : 5M OHM (MIN) 500VDC
- 6. HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC.NO."EPI12".
- 7. THIS PRODUCT IS LEAD FREE AND CONTROLLED BY ROHS.

ITEM	DESCRIPTION	QTY	NOTES
6	ACETATE TAPE	70mm	COLOR BLACK W90
5	COPPER FOIL	70mm	COPPER FOIL W70*L80
4	LABEL	1PC	W12*L22 081-0004-317
3	CLARITY TAPE	70mm	W=20mm
2	FLAT RIBBON CABLE	110mm	UL2651 28AWG*26C PITCH=1.27mm GRAY JACKET
1	26PIN IDC CONN	2PCS	2*13Pin , PITCH=2.54mm GOLD FLASH , BLACK INSULATION

COMPONENT LIST

X ±	X' ±	UNITS	NAME(INTENDED USE)	QTY	FINISH
X ±	X' ±	mm(inch)			
.X ±	.X' ±	MAT'L			
.XX ±	.XX' ±				
.XXX ±	.XXX' ±				

APPD:	JAMES J.S.CHEM2/09/07	DWG NO.:	316-0000-2836
CHKD:	Leslie poe2/09/07	TITLE:	26P FLAT CABLE ASS'Y
DR:	Qi LI2/09/07	PART NO.(INTENDED USE)	FC26000-05-DF

FOXCONN
 HON HAI PRECISION IND. CO.,LTD.
 TAIPEI, TAIWAN, R.O.C.

SCALE: SHEET 1/1