


# Catalog Number: 41405-025F

## Features and Ratings

- Ringless Type Meter Socket
- 200A Continuous, 250A Max.
- Outdoor Enclosure (NEMA Type 3R)
- 1 Phase, 3 Wire, 600V AC
- 5 Jaw
- HQ Clamp Jaw Lever Bypass Meter Socket
- For Overhead or Underground Service
- RX Hub Opening With Coverplate Installed
- Aluminum enclosure
- Stainless steel latch and hasp

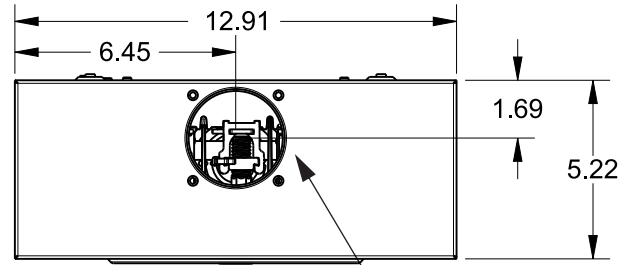

RX HUB PROVISION

### Accessories

**RX HUB KITS**  
 Cat No: H38597-2 (1.25")  
 Cat No: H38598-2 (1.50")  
 Cat No: H38599-2 (2.00")  
 Cat No: H38600-2 (2.50")

**RX HUB KITS**  
 Cat No: EC38597 (1.25")  
 Cat No: EC38598 (1.50")  
 Cat No: EC38599 (2.00")  
 Cat No: EC38600 (2.50")


**HUB COVER PLATE**  
 Cat No: H38595-2

**GROUND LUG KIT**  
 Cat No: H55303  
 Wire Size #2-14 50 LB-IN





### Lugs, Wire Sizes and Torques

LOCATION	LUG SIZE	TORQUE
LINE*	#6-350 kcmil	275 LB-IN
LOAD*	#6-350 kcmil	275 LB-IN
NEUTRAL*	#6-350 kcmil	275 LB-IN
GROUND*	#14-2	45 LB-IN

\* External Hex drive 1/2"  
 \* Internal Hex drive 5/16"

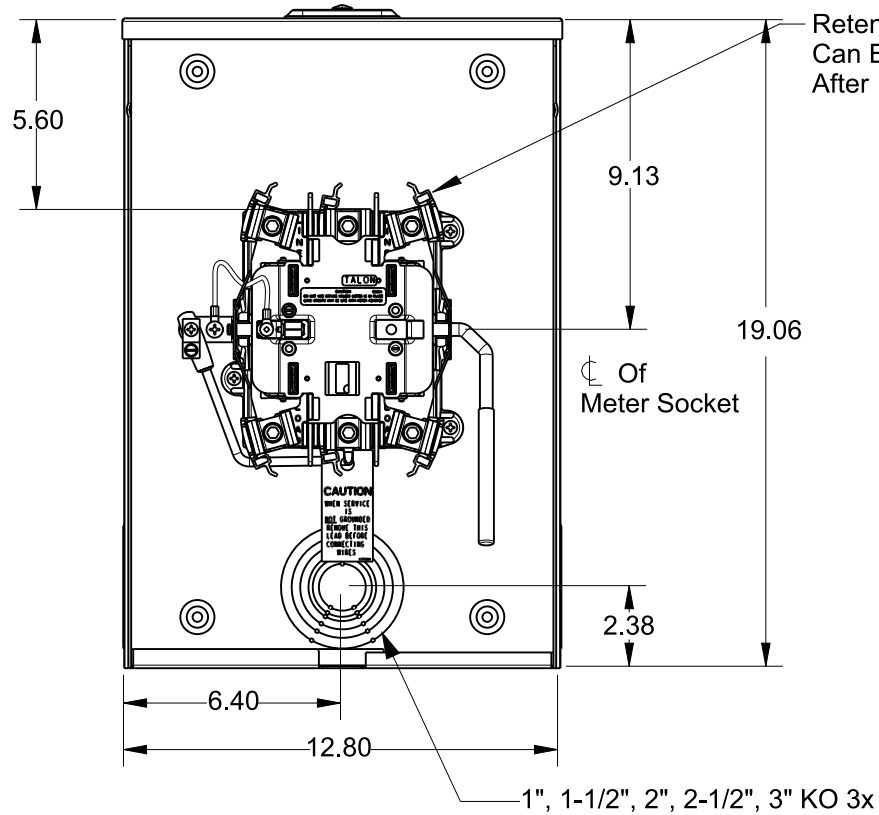

1", 1-1/2", 2", 2-1/2", 3" KO 3x

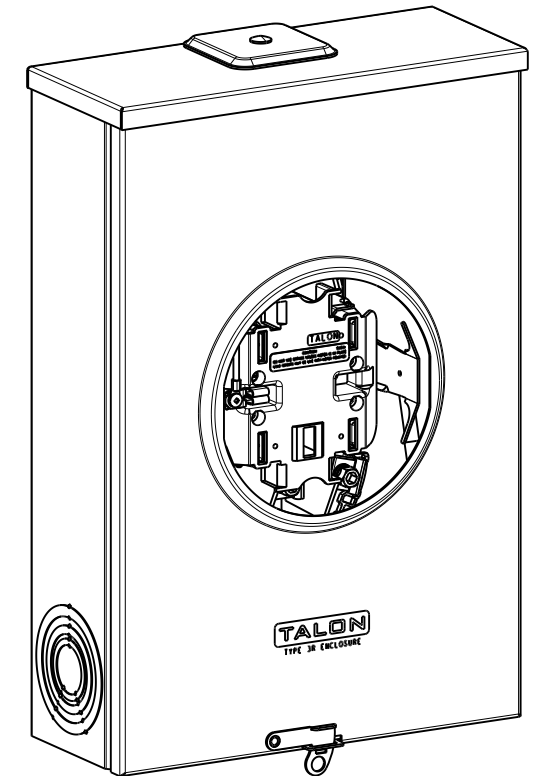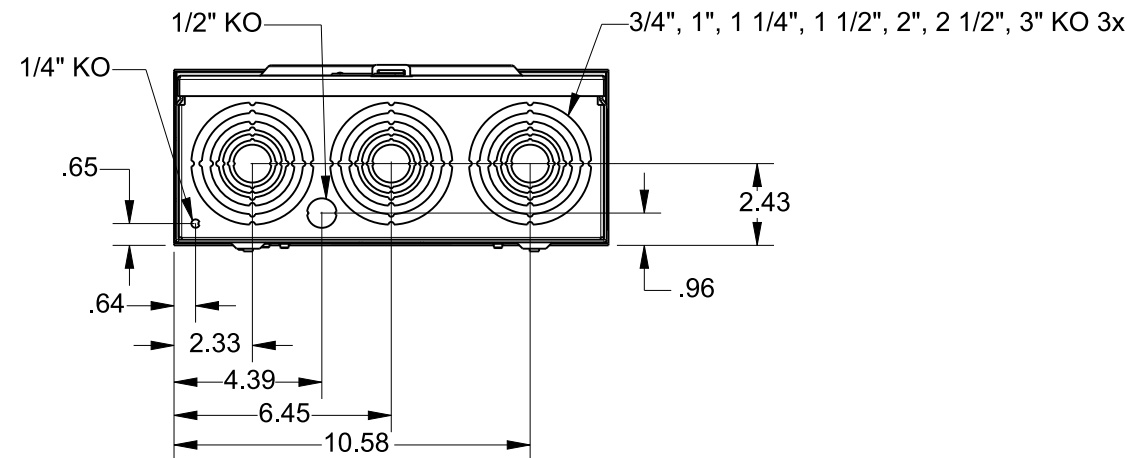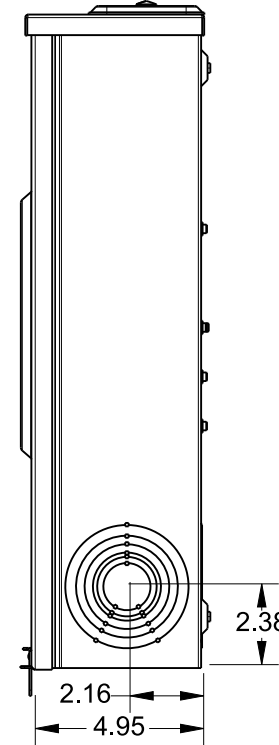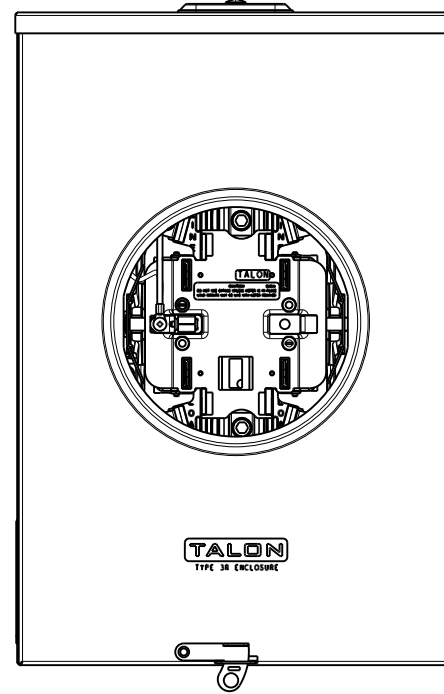

**TALON**  
**Meter Socket**

Description:  
**200A Cont, 5 Jaw, HQ-5U, 600V AC**  
**Aluminum Enclosure**